



JURNAL RESTI

REKAYASA SISTEM DAN
TEKNOLOGI INFORMASI



SINTA Accredited Rank 2
Decree of the Director General of
Higher Education, Research, and Technology,
Number: 158/E/KPT/2021



Published by Professional Organization of
Indonesian Informatics Experts Association
Ikatan Ahli Informatika Indonesia (IAII).
Jl. Jati Padang Raya No. 41, South Jakarta,
Pasar Minggu, Postal Code 12540

Email: jurnal.resti@gmail.com

Website Publisher :

www.iaii.or.id

Website Journal :

www.jurnal.iaii.or.id/index.php/RESTI

Jurnal RESTI (Rekayasa Sistem dan Teknologi Informasi) indexed by:



FOREWORD

Thanks to the sincere efforts of the whole editing team, reviewers, and the assistance of many parties, Volume. 6 No. 5 Oct 2022, Alhamdulillah, can be published on schedule.

This volume consists of 27 articles with 81 authors from 23 universities/institutions in Indonesia and United Kingdom, namely: Telkom University, University of Singaperbangsa Karawang, Universitas Ahmad Dahlan, Universitas Katolik Soegijapranata, Universitas Nusa Mandiri, Universitas Bina Sarana Informatika, IPB University, UIN Sunan Gunung Djati Bandung, Universitas Dian Nuswantoro, STMIK Antar Bangsa, Universitas Indonesia, University of Muhammadiyah Malang, Widya Mandira Catholic University, Badan Riset dan Inovasi Nasional, Institut Teknologi Telkom Purwokerto, STIKOM Tunas Bangsa, University College London, Universitas Budi Luhur, Politeknik Negeri Padang, Universitas Putra Indonesia YPTK Padang, Diponegoro University, Politeknik Saint Paul Sorong and Universitas Internasional Semen Indonesia.

Publishing Vol. 6 No. 5 must be kept with the help of many parties, especially from peer-review partners who have been willing to work hard in reviewing manuscripts so that they are worthy of publication in this journal and the entire editorial team. We also appreciate the researchers who have made RESTI Journal a medium for publishing their research results.

We hope that the articles in the RESTI Journal can add to the treasures of knowledge and scientific insight, especially in the field of informatics. We still hope for constructive criticism and suggestions for improving this journal.



Editor in Chief
Dr. Ir. Yuhefizar, S.Kom., M.Kom., IPM

JURNAL RESTI: Rekayasa Sistem dan Teknologi Informasi

Vol 6. No 5 – October 2022

<https://jurnal.iaii.or.id/index.php/RESTI/issue/view/35>

Big Five Personality Assessment Using KNN method with RoBERTA

Athirah Rifdha Aryani, Erwin Budi Setiawan

<https://doi.org/10.29207/resti.v6i5.4394>

818-823

Network Security Analysis Simulation at the GCS in the UCAV to support the Indonesian Defense Area

Bitra Parga Zen, Anggi Zafia, Iwan Nofi Yono Putro

<https://doi.org/10.29207/resti.v6i5.4412>

824-831

The Exploring feature selection techniques on Classification Algorithms for Predicting Type 2 Diabetes at Early Stage

Mila Desi Anasanti, Khairunisa Hilyati, Annisa Novtariany

<https://doi.org/10.29207/resti.v6i5.4419>

832-839

Aspect-Based Sentiment Analysis on Twitter Using Logistic Regression with FastText Feature Expansion

Hanif Reangga Alhakiem, Erwin Budi Setiawan

<https://doi.org/10.29207/resti.v6i5.4429>

840-846

Optimization Ground Glass Opacities (GGO) Detection Using Multipixel Interpolation Techniques

Musli Yanto, Yogi Wiyandra

<https://doi.org/10.29207/resti.v6i5.4433>

847 - 854

Intermittent Demand Forecasting Using LSTM With Single and Multiple Aggregation

Fityan Azizi, Wahyu Catur Wibowo

<https://doi.org/10.29207/resti.v6i5.4435>

855 - 859

Identify the Color and Shape of Eggplant Using Back Propagation Method

Siswanto, Yuhefizar, M. Anif, Basuki Hari Prasetyo, Ari Saputro

<https://doi.org/10.29207/resti.v6i5.4453>

860 - 865

House Prices Segmentation Using Gaussian Mixture Model-Based Clustering

Muhammad Hafidh Raditya, Indwiarti, Aniq Atiqi Rohmawati

<https://doi.org/10.29207/resti.v6i5.4459>

866 - 871

Application of The Naïve Bayes Classifier Algorithm to Classify Community Complaints

Keszya Wabang, Oky Dwi Nurhayati, Farikhin

<https://doi.org/10.29207/resti.v6i5.4498>

872-876

Implementation of Maggot Cage Temperature and Humidity Control Using ESP8266 Based On the Internet of Things

Luluk Suryani, Ery Murniyasih, Marcelinus Petrus Saptono, Raditya Faisal Waliulu, Imam Trianggoro Saputro,

Sony Rumalutur, Wennie Mandela

<https://doi.org/10.29207/resti.v6i5.4502>

877 - 882

Implementation of Open-Source ERP-Based Fleet Management System on SMEs Transportation Service Provider

Muhammad Faisal Ibrahim, Yogantara Setya Dharmawan, Ngatini

<https://doi.org/10.29207/resti.v6i5.4538>

883 - 890

Malaria Blood Cell Image Classification using Transfer Learning with Fine-Tune ResNet50 and Data Augmentation

Aris Muhandisin, Yufis Azhar

<https://doi.org/10.29207/resti.v6i5.4322>

891 - 897



Network Security Analysis Simulation at the GCS in the UCAV to support the Indonesian Defense Area

Bitu Parga Zen¹, Anggi Zafia², Iwan Nofi Yono Putro³

^{1,2} Informatics Engineering, Faculty of Informatics, Telkom Purwokerto Institute of Technology

³ National Research and Innovation Agency

¹ bitu@ittelkom-pwt.ac.id, ² zafia@ittelkom-pwt.ac.id, ³ iwan.nofi.yono.putro@brin.go.id

Abstract

An unmanned Combat Aerial Vehicle (UCAV) is an unmanned aircraft that has a serial control communication device that can be seen directly in real-time. In carrying out UCAV flights, it requires good and stable data transmission security so that signal loss does not occur during the communication process. Researchers create a concept of a security scheme in communication at the Ground Control Station (GCS) that can be used for the use of UCAV communication at long distances, using the Quality of Service (QoS) method from OPEN VPN with parameters Throughput, Packet Loss, Delay (Latency) and Jitter can determine the reliability of a UCAV communication network. Based on the results of Quality of Service (QoS) testing with OpenVPN Autopilot UCAV objects on the ICMP protocol have the smallest packet loss value of 0%, the delay parameter is 5.2ms, the jitter parameter gets a high value of 4.68 ms higher than the TCP protocol and UDP. The TCP protocol has a relatively small packet loss value of 0.3% and ranks second to the ICMP protocol, then the delay value is 8.48 ms greater than the ICMP and UDP protocols, and the jitter parameter value is 0.0013 ms smaller than the ICMP and UDP protocols. The use of VPN OVPN is a good recommendation. Still, researchers suggest that should use not only OPEN VPN but also L2TP VPN and PPTP VPN for security at the Ground Control Station at UCAV as a comparison.

Keywords: Unmanned Combat Aerial Vehicle; Quality of Service; Defense; Ground Control Station; OPEN VPN

1. Introduction

The Republic of Indonesia has maritime and land borders with ten countries in the region (Thailand, Malaysia, Vietnam, the Philippines, East Leste, Papua New Guinea, Australia, and the Republic of Palau) [1] is the 7th largest country in the world based on geographical location and has waters as one of the trades. which makes Indonesia vulnerable to border problems related to regional border issues which have always been a problem for the beneficiary parties, the real threat of armed criminal groups and separatism currently has the potential to disrupt the country's defense and security system.[2]. entering the industrial revolution 4.0 where all have used technology as the main component in various fields, especially industrial production, information, and communication technology [3]. anticipating national defense to maintain the sovereignty of the nation [4], this certainly cannot be separated from the modern defense equipment owned by developed countries, one of which is the development of unmanned aircraft technology Unmanned Combat Aerial Vehicle (UCAV).

UCAV aims to be a control serial communication tool that can be seen directly in real-time [5] and can monitor if there is a threat in the defense area. UCAV is controlled by the Ground Control Station (GCS) which can be used for the use of UCAV communications at long distances [6], but the obstacle is that it is vulnerable to interference, both from damage to the device and from security factors. In GCS, a computer network is needed for stability and security when sending and receiving data to ensure that the data sent reaches its destination [7], and the data sent is confidential.

For this reason, it is necessary to test network quality and data security on the network at GCS using Quality of Service (QoS) analysis [8]. The quality of data delivery services is the key to the attack area that affects the operational performance of the Unmanned Combat Aerial Vehicle (UCAV). Data transmission service area refers to the distance at which a missile on a UCAV, if this is neglected, can hit and damage a target with a certain probability under specific environmental parameters, including altitude, missile and target speed,

ballistic tilt angle, entry angle, and off-axis angle, in an air combat environment [9]

One way to test network quality is to perform a QoS analysis. Quality of Service (QoS) is a technology that allows network administrators to deal with the effects of congestion on packet flow traffic from various services to make optimal use of network resources, rather than increasing the physical capacity of the network. [10]. defines that QoS is a technique for managing bandwidth, delay, jitter, and packet loss for packet flow in a network [10]. The purpose of the QoS mechanism is to influence at least one of the four basic QoS parameters that have been determined. In addition to testing network stability using QoS, data transmission security needs to be implemented to ensure data safety from unauthorized parties [11]. One way to secure data on a network is to implement a Virtual Private Network (VPN) which can make a network private and secure using a public network or the internet.

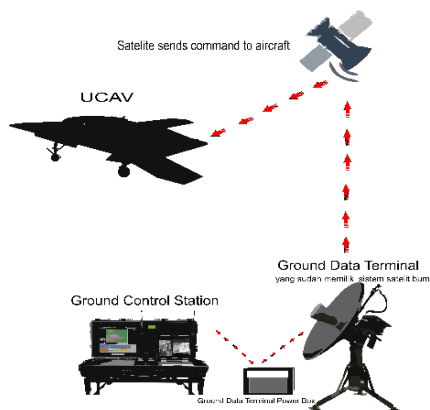


Figure 1. GCS to UCAV Communication Scheme

This is one of the basics of making simulations and analyses of QoS (Quality Of Service) throughput, delay, jitter, and packet loss stages. [12] with the addition of data security using VPN OpenVPN using the GNS3 network simulator application with the Hardware In The Loop Simulations technique which is a simulation involving some external hardware as support that will be applied to the Ground Control Station to control UCAV.

2. Research Method

This research will build a simulation and analysis of the Quality of Service on Unmanned Combat Aerial Vehicle Communication Networks for Data Security by explaining the levels or sequences starting from Throughput, delay, jitter, and packet loss at Ground Control Station Using OPENVPN with Hardware In The Loop Technique, Design This simulation will be a study that will be used for testing. and identify needs by providing detailed and accurate research figures. Figure

2 below are the stages of the process carried out by the researcher

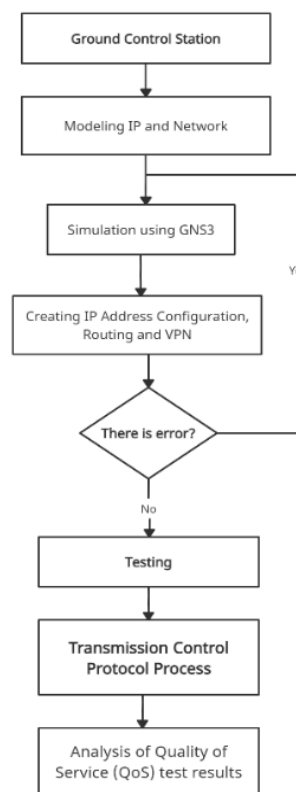


Figure 2 Research Process Flow

2.1 Modeling IP and Network

In the IP address classification stage Configure all router interfaces connected to multiple ports by assigning an IP address to each port connected to the router. [13]. regarding the IP address to be used, there are several public IPs used for certain routers and private IPs. The following table classifier IP Address used.

Table 1. IP Address Classification

Device	Interfaces	IP Address
Router Pustekbang BRIN	ether1	103.16.223.107/29
	ether1	10.10.5.136/27
	local VPN	10.11.6.1/32
Router1	ether1	103.16.223.108/29
	ether2	103.51.131.107/29
Router 2	ether1	103.51.131.108/29
	ether2	10.0.0.1/30
Router 3	ether1	10.0.0.2/30
	ether2	10.0.0.5/30
GCS Sat	ether1	10.0.0.6/30
	ether2	10.0.0.9/30
Satellite	ether1	10.0.0.10/30
	ether2	10.0.0.13/30
Modern Sat UCAV	ether1	10.0.0.14/30
	ether2	10.0.0.17/3
Router Client	ether1	10.0.0.18/30
	ether2	10.11.12.1/29
	remote VPN	10.11.6.2/32

In Figure 2 there are 8 device routers, where the

Pustekbang BRIN router is marked with a yellow background, while the client router side is marked with a green background. for public routers or routers outside the server and client are marked with a gray background (gray). Furthermore, for the Server and Client in this simulation, Cloud2 is the Pustekbang Server and Cloud3 is the Client. Each device is external hardware connected to the GNS3 simulation software with the concept of Hardware in The Loop System. This topology design is implemented in the GNS3 software by adding a Mikrotik Router to the Qemu system contained in the GNS3. Then each router is connected and configured as needed.

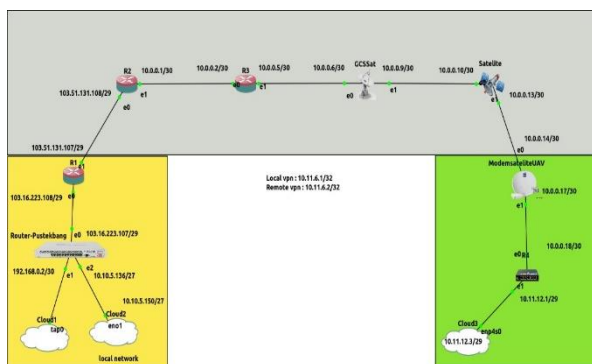


Figure 2. Communication Network Topology Design

2.2 Quality of Service (QoS)

Quality of Service (QoS) is an attempt to define the characteristics of a network quality by measuring how good the network quality of service is using certain parameters [14]. The International Telecommunication Union-Telecommunication (ITU-T) G.1010 standards are discussed in this paper as they relate to the quality of service (QoS) performance from telemetry data utilizing UDP protocols both with and without VPN on Ground Control Station (GCS) communication with UCAV [15]. G.1010 is an ITU-T standard. [16] .

A guarantee for zero information loss or the absence of packet loss is a parameter that must be taken into account for data transfer. Then, the delay that happens must be less than 1 second and the fluctuation of the delay (jitter) that occurs must adhere to certain guidelines [15]. It is anticipated that the reliability performance of satellite communications that are intended and may be beneficial for long-range UCAV communication applications would be known from the findings of testing and analysis [17].

There are 3 levels of QoS that are often used, namely Best-effort service, which is a service model where each application for each data transmission is required without asking permission from the computer network. a service that can meet all the requirements of different QoS rules [18]. The ultimate goal of QoS is to provide a better and more planned network service with controlled dedicated bandwidth, jitter, and latency and

increase loss characteristics centered on network characteristics. [19]

a. Throughput

The total number of successful packet arrivals seen at the destination over the course of a certain time interval divided by the length of that time interval is known as throughput. A network's real capacity for data transmission is known as throughput [20]. Because throughput can be referred to as bandwidth under actual circumstances, throughput is typically always associated with bandwidth.

$$Throughput = \frac{Datapacketreceived}{observationtime}$$

Table 2. Category Throughput

Throughput	Throughput	Index
Very good	76%-100%	4
Good	51% s/d 75%	3
Fair	26% s/d 50%	2
Poor	<25%	1

b. Delay

Delay (Latency) is the time it takes for data to travel the distance from the sender to the receiver. delay can be affected by long distances, physical media, data congestion, or also long processing times [18]. The equation to calculate the delay is:

$$Avaragedelay = \frac{Totaldelay}{Totalpacketsreceived} \quad (1)$$

Table 1. Category Delay

Category Delay	Delay	Index
Very good	< 150 ms	4
Good	150 s/d 300 ms	3
Fair	301 s/d 450 ms	2
Poor	> 450 ms	1

[21]

c. Jitter

Jitter is a delay that varies over time. Jitter is referred to as a change in delay variation or the difference between the initial delay and the next delay in the data transmission period [22]. The equation for calculating the jitter is:

$$Jitter = \frac{Totalvariationdelay}{Totalpacketsreceived} \quad (2)$$

The total variation of the delay is obtained from:

$$Total\ Variation\ Delay = Delay - (Average\ Delay) \quad (3)$$

Table 2. Category Jitter

Kategori Jitter	Peak Jitter	Index
Very good	0 ms	4
Good	1 s/d 75 ms	3
Fair	76 s/d 225 ms	2
Poor	> 225 ms	1

[21]

d. Packet Loss

Packet loss is a parameter that shows the condition of a data packet that is lost from the total number of packets that can occur due to collision and congestion on a network [23]. The equation to calculate packet loss is:

$$PacketLoss = \frac{Package\ sent - Package\ received}{Received\ package} \times 100\% \quad (4)$$

Table 3. Category Packet Loss

Kategori Packet Loss	Packet Loss	Index
Very good	0% - 2%	4
Good	3% - 14%	3
Fair	15% - 25%	2
Poor	> 25 %	1

2.3 Open VPN type VPN configuration

VPN configuration is carried out on the BRIN pustekbang router as a VPN Open VPN Server. VPN Open VPN Server is made using the default settings on the Pustekbang router so that it can be accessed by the client side as a tunnel that connects the network. The security used only uses default encryption to be able to connect to the network without using additional security such as IPsec or certificates. The following is the VPN Server OVPN configuration that has been created on the Pustekbang router. First, to increase the security of this OpenVPN connection, we will add certificates to the server as well as the client. After we create the certificate, we will first activate the OpenVPN Server on the main gateway router at 'Server-Pustekbang'. Type in SSL Linux PPP → on the Interface Tab of the OVPN Server Command. Then to enable OpenVPN Server check the Enabled option. Also, add a certificate for OpenVPN connection in 'Router-Pustekbang' as OVPN Server in parameter 'Certificate' as shown below.

```

QEMU (ModemsatelliteUAV) - TigerVNC
[admin@QINU] > int pr
Flags: D - dynamic, X - disabled, R - running, S - slave
# NAME TYPE ACTUAL-MTU L2MTU
0 R ether1 ether 1500
1 R ether2 ether 1500
2 R ether3 ether 1500
3 R ether4 ether 1500
4 R ether5 ether 1500
[admin@QINU] > ip add pr
Flags: K - disabled, I - invalid, D - dynamic
# ADDRESS NETWORK INTERFACE
0 10.0.0.14/30 10.0.0.12 ether1
1 10.0.0.17/30 10.0.0.16 ether2
[admin@QINU] > ip route pr
Flags: K - disabled, A - active, D - dynamic,
C - connect, S - static, r - rip, b - bgp, o - ospf, m - mnc,
B - blackhole, U - unreachable, P - prohibit
# DST-ADDRESS PREF-SRC GATEWAY DISTANCE
0 A S 0.0.0.0/0 10.0.0.13 1
1 ADC 10.0.0.12/30 10.0.0.14 ether1 0
2 ADC 10.0.0.16/30 10.0.0.17 ether2 0
[admin@QINU] >
    
```

Figure 3 OPENVPN Server Configuration

Routing configuration is also carried out on the UAV Satellite Modem router to connect to other router networks to be connected. The following is a picture of the routing configuration used on the UAV Satellite Modem router, As with other VPN connections, we will also create a 'PPP secret' to dial a connection from the OVPN Client

```

QEMU (Router-Pustekbang) - TigerVNC
CA-Template Server-Template ca-crl-host do interval number
Client-Template ca ca-on-smart-card duration name
[admin@router-pustekbang] > certificate sign CA-Template ca-crl-host=103.16.223.107 name=myCA
progress: done
[admin@router-pustekbang] > certificate sign Server-Template ca=myCA name=server
progress: done
[admin@router-pustekbang] > certificate sign Client-Template ca=myCA name=client
progress: done
[admin@router-pustekbang] > certificate pr
Flags: K - private-key, L - crt, C - smart-card-key, A - authority,
I - issued, R - revoked, E - expired, T - trusted
# NAME COM. SUBJECT-ALT-NAME FIN..
0 KL A T myCA 103.. 9F0..
1 K A ser.. ser.. 37A..
2 K A cli.. cli.. 156..
[admin@router-pustekbang] > certificate set
client common-name key-size name subject-alt-name numbers
server days-valid locality state unit
[admin@router-pustekbang] > certificate set client trusted=yes
[admin@router-pustekbang] > certificate set server trusted=yes
[admin@router-pustekbang] >
    
```

Figure 4 OPENVPN Authentication Configuration

Next, do the configuration for the 'Client' as an OpenVPN Client. Because we use the terminal, we go to the PPP menu → Interfaces → Add [+] → OVPN Client. Then fill in each parameter, If OpenVPN is successfully connected then we can see the OpenVPN Server router in the PPP → Active Connections menu. There will be displayed information from client devices that have successfully connected to OpenVPN Server.

Schematic on the Ground Control Station as the main link to the Unmanned Combat Aerial Vehicle (UCAV) which functions as reconnaissance and helps map out areas [24] at the time of combined operation which has 3 main components: 1. UCAV as the main component that can be flown for monitoring by air; 2. Ground Control Station as a computer for the control room in the UCAV remote control which can be viewed with a monitor in real-time both for taking pictures and for video, then the routing configuration is carried out on the UCAV Satellite Modem router to connect other router networks to be connected. The following figure shows the routing configuration used on the UCAV Satellite Modem router. 3. Ground Data Terminal as a distance determinant, namely the antenna for connecting the Ground Control Station to UCAV

```

QEMU (ModemsatelliteUAV) - TigerVNC
[admin@QINU] > int pr
Flags: D - dynamic, X - disabled, R - running, S - slave
# NAME TYPE ACTUAL-MTU L2MTU
0 R ether1 ether 1500
1 R ether2 ether 1500
2 R ether3 ether 1500
3 R ether4 ether 1500
4 R ether5 ether 1500
[admin@QINU] > ip add pr
Flags: X - disabled, I - invalid, D - dynamic
# ADDRESS NETWORK INTERFACE
0 10.0.0.14/30 10.0.0.12 ether1
1 10.0.0.17/30 10.0.0.16 ether2
[admin@QINU] > ip route pr
Flags: X - disabled, A - active, D - dynamic,
C - connect, S - static, r - rip, b - bgp, o - ospf, m - mnc,
B - blackhole, U - unreachable, P - prohibit
# DST-ADDRESS PREF-SRC GATEWAY DISTANCE
0 A S 0.0.0.0/0 10.0.0.13 1
1 ADC 10.0.0.12/30 10.0.0.14 ether1 0
2 ADC 10.0.0.16/30 10.0.0.17 ether2 0
[admin@QINU] >
    
```

Figure 5 UAV satellite modem router configuration.

This research focuses on simulating the network design on GNS3 simulation software. In QoS, there are 3 main parameters used to analyze the quality of the service, namely, parameters of delay, jitter, and packet loss in the UCAV satellite modem router. In the analysis stage

of the results of the Quality of Service (QoS) test the parameters used are the parameters of delay, jitter, and packet loss in each of the tested protocols, namely the routing configuration protocol is also carried out on the UCAV Satellite Modem router to connect other router networks so that they are connected. The following figure is the routing configuration used on the UCAV Satellite Modem router.

3. Result and Discussion

ICMP testing is done by sending a ping test packet to the server using the command: "ping 10.10.10.90" for a time interval of 100 seconds and is carried out 10 times. This test aims to maximize the data later in processing QoS. Parameters

```
64 bytes from 10.10.9.90: icmp_seq=77 ttl=61 time=12.5 ms
64 bytes from 10.10.9.90: icmp_seq=78 ttl=61 time=12.3 ms
64 bytes from 10.10.9.90: icmp_seq=79 ttl=61 time=9.45 ms
64 bytes from 10.10.9.90: icmp_seq=80 ttl=61 time=8.91 ms
64 bytes from 10.10.9.90: icmp_seq=81 ttl=61 time=7.99 ms
64 bytes from 10.10.9.90: icmp_seq=82 ttl=61 time=41.0 ms
64 bytes from 10.10.9.90: icmp_seq=83 ttl=61 time=6.70 ms
64 bytes from 10.10.9.90: icmp_seq=84 ttl=61 time=35.0 ms
64 bytes from 10.10.9.90: icmp_seq=85 ttl=61 time=11.3 ms
64 bytes from 10.10.9.90: icmp_seq=86 ttl=61 time=30.4 ms
64 bytes from 10.10.9.90: icmp_seq=87 ttl=61 time=12.0 ms
64 bytes from 10.10.9.90: icmp_seq=88 ttl=61 time=21.7 ms
64 bytes from 10.10.9.90: icmp_seq=89 ttl=61 time=7.58 ms
64 bytes from 10.10.9.90: icmp_seq=90 ttl=61 time=25.8 ms
64 bytes from 10.10.9.90: icmp_seq=91 ttl=61 time=11.2 ms
64 bytes from 10.10.9.90: icmp_seq=92 ttl=61 time=21.7 ms
64 bytes from 10.10.9.90: icmp_seq=93 ttl=61 time=11.2 ms
64 bytes from 10.10.9.90: icmp_seq=94 ttl=61 time=18.5 ms
64 bytes from 10.10.9.90: icmp_seq=95 ttl=61 time=7.83 ms
64 bytes from 10.10.9.90: icmp_seq=96 ttl=61 time=14.5 ms
64 bytes from 10.10.9.90: icmp_seq=97 ttl=61 time=11.8 ms
64 bytes from 10.10.9.90: icmp_seq=98 ttl=61 time=11.0 ms
64 bytes from 10.10.9.90: icmp_seq=99 ttl=61 time=12.1 ms
64 bytes from 10.10.9.90: icmp_seq=100 ttl=61 time=11.8 ms
^C
-- 10.10.9.90 ping statistics --
100 packets transmitted, 100 received, 0% packet loss, time 99175ms
rtt min/avg/max/mdev = 6.461/12.135/41.048/5.861 ms
```

Figure 6 ICMP Protocol Test

TCP testing is done by sending packets via port 5000 using the iperf3 application to the server using the command "iperf3 -c 10.10.9.90 -p 5000 -t 100 > filename.txt". This test is carried out with a time interval of 100 seconds and is carried out ten times to get maximum data on QoS processing.

```
[ 5] 77.00-79.00 sec 1.96 MBytes 16.4 Mbits/sec 2 41.0 KBytes
[ 5] 78.00-79.00 sec 2.02 MBytes 16.9 Mbits/sec 5 41.0 KBytes
[ 5] 79.00-80.00 sec 1.78 MBytes 14.9 Mbits/sec 3 42.4 KBytes
[ 5] 80.00-81.00 sec 1.78 MBytes 14.9 Mbits/sec 5 33.9 KBytes
[ 5] 81.00-82.00 sec 1.96 MBytes 16.4 Mbits/sec 4 36.8 KBytes
[ 5] 82.00-83.00 sec 1.96 MBytes 16.4 Mbits/sec 9 35.4 KBytes
[ 5] 83.00-84.00 sec 1.78 MBytes 14.9 Mbits/sec 4 41.0 KBytes
[ 5] 84.00-85.00 sec 1.96 MBytes 16.4 Mbits/sec 3 45.2 KBytes
[ 5] 85.00-86.00 sec 1.96 MBytes 16.4 Mbits/sec 4 50.9 KBytes
[ 5] 86.00-87.00 sec 1.96 MBytes 16.4 Mbits/sec 8 33.9 KBytes
[ 5] 87.00-88.00 sec 1.78 MBytes 14.9 Mbits/sec 4 41.0 KBytes
[ 5] 88.00-89.00 sec 1.78 MBytes 14.9 Mbits/sec 5 38.2 KBytes
[ 5] 89.00-90.00 sec 2.02 MBytes 16.9 Mbits/sec 4 38.2 KBytes
[ 5] 90.00-91.00 sec 1.78 MBytes 14.9 Mbits/sec 4 22.6 KBytes
[ 5] 91.00-92.00 sec 1.78 MBytes 14.9 Mbits/sec 5 32.5 KBytes
[ 5] 92.00-93.00 sec 1.96 MBytes 16.4 Mbits/sec 3 31.1 KBytes
[ 5] 93.00-94.00 sec 1.78 MBytes 14.9 Mbits/sec 3 46.7 KBytes
[ 5] 94.00-95.00 sec 1.96 MBytes 16.4 Mbits/sec 7 36.8 KBytes
[ 5] 95.00-96.00 sec 1.96 MBytes 16.4 Mbits/sec 3 41.0 KBytes
[ 5] 96.00-97.00 sec 1.66 MBytes 13.9 Mbits/sec 6 41.0 KBytes
[ 5] 97.00-98.00 sec 2.14 MBytes 17.9 Mbits/sec 6 39.6 KBytes
[ 5] 98.00-99.00 sec 1.60 MBytes 13.4 Mbits/sec 7 22.6 KBytes
[ 5] 99.00-100.00 sec 1.78 MBytes 14.9 Mbits/sec 5 31.1 KBytes

[ ID] Interval Transfer Bitrate Retx sender receiver
[ 5] 0.00-100.00 sec 178 MBytes 14.9 Mbits/sec 474
[ 5] 0.00-100.00 sec 177 MBytes 14.9 Mbits/sec
```

Figure 7 TCP Protocol Test

UDP testing is done by sending packets via port 5000 using the iperf3 application to the server using the bandwidth obtained from the TCP protocol testing. This test is carried out with a time interval of 100 seconds and is carried out ten times to get maximum data on QoS processing.

```
[ 5] 78.00-79.00 sec 1.78 MBytes 14.9 Mbits/sec 1287
[ 5] 79.00-80.00 sec 1.78 MBytes 14.9 Mbits/sec 1286
[ 5] 80.00-81.00 sec 1.78 MBytes 14.9 Mbits/sec 1286
[ 5] 81.00-82.00 sec 1.78 MBytes 14.9 Mbits/sec 1286
[ 5] 82.00-83.00 sec 1.78 MBytes 14.9 Mbits/sec 1287
[ 5] 83.00-84.00 sec 1.78 MBytes 14.9 Mbits/sec 1286
[ 5] 84.00-85.00 sec 1.78 MBytes 14.9 Mbits/sec 1286
[ 5] 85.00-86.00 sec 1.78 MBytes 14.9 Mbits/sec 1287
[ 5] 86.00-87.00 sec 1.78 MBytes 14.9 Mbits/sec 1286
[ 5] 87.00-88.00 sec 1.78 MBytes 14.9 Mbits/sec 1286
[ 5] 88.00-89.00 sec 1.78 MBytes 14.9 Mbits/sec 1286
[ 5] 89.00-90.00 sec 1.78 MBytes 14.9 Mbits/sec 1287
[ 5] 90.00-91.00 sec 1.78 MBytes 14.9 Mbits/sec 1286
[ 5] 91.00-92.00 sec 1.78 MBytes 14.9 Mbits/sec 1286
[ 5] 92.00-93.00 sec 1.78 MBytes 14.9 Mbits/sec 1286
[ 5] 93.00-94.00 sec 1.78 MBytes 14.9 Mbits/sec 1287
[ 5] 94.00-95.00 sec 1.78 MBytes 14.9 Mbits/sec 1286
[ 5] 95.00-96.00 sec 1.78 MBytes 14.9 Mbits/sec 1286
[ 5] 96.00-97.00 sec 1.78 MBytes 14.9 Mbits/sec 1286
[ 5] 97.00-98.00 sec 1.78 MBytes 14.9 Mbits/sec 1287
[ 5] 98.00-99.00 sec 1.78 MBytes 14.9 Mbits/sec 1286
[ 5] 99.00-100.00 sec 1.78 MBytes 14.9 Mbits/sec 1286

[ ID] Interval Transfer Bitrate Jitter Lost/Total Datagrams
[ 5] 0.00-100.00 sec 178 MBytes 14.9 Mbits/sec 0.808 ms 0/128625 (0%) sender
[ 5] 0.00-100.00 sec 177 MBytes 14.9 Mbits/sec 0.782 ms 358/128625 (0.28%) receiver
iperf Done.
```

Figure 8 UDP Protocol Test

In the analysis phase of the Quality of Service (QoS) test results, the parameters used are the delay, jitter, and packet loss parameters in each of the tested protocols, namely the Internet Control Message Protocol (ICMP), Transmission Control Protocol (TCP) and User Data Protocol. (UDP). The following are the results of the test graph for each protocol obtained:

- a. Throughput is the bandwidth obtained in each trial of the TCP and UDP protocols

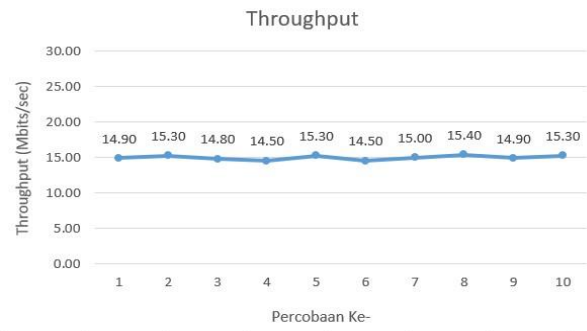


Figure 9 TCP and UDP Throughput Graph

- b. Protocol ICMP Delay ICMP

The following is the result of measuring the QoS parameters of the ICMP protocol delay based on a predetermined test scheme, the test results above the resulting graph show that the maximum average delay is 7.75 ms, the minimum average delay is 2.81 ms, and the average delay is 2.81 ms. total delay is 5.20 ms

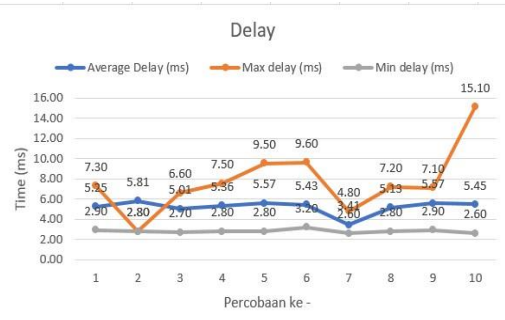


Figure 10. ICMP Delay Graph

Jitter ICMP

The following are the results of the ICMP protocol jitter parameter QoS measurements based on a predetermined test scheme. In the parameters of the jitter, the maximum average jitter is 12.75 ms, the minimum average jitter is 0 ms, and the overall average jitter is 4.68 ms.

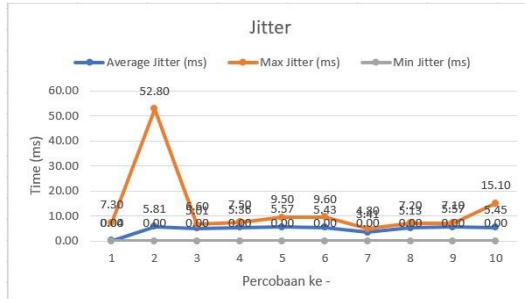


Figure 11. ICMP Jitter Graph

Packet Loss

The following is the result of measuring the QoS parameters of the ICMP packet loss protocol based on the test scheme that has been determined based on the graph below, in the ICMP packet loss protocol parameter, no packet loss was found at 0%.

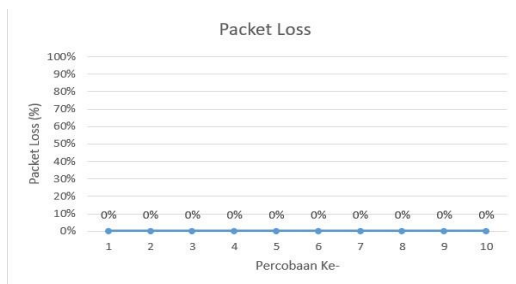


Figure 12. Grafik Packet Loss ICMP

c. Protocol TCP

Delay TCP

The following is the result of measuring the QoS parameters of the TCP protocol delay based on the test scheme that has been determined from the graph above, the delay results from the TCP protocol obtained the maximum delay on the 7th experiment with a value of 112.00 ms, the minimum delay on the 8th experiment with a value of 1.8000 ms, the maximum average delay on the 9th experiment with a value of 8.8153 ms, and the minimum average delay on the 2nd experiment with a value of 8.1801.

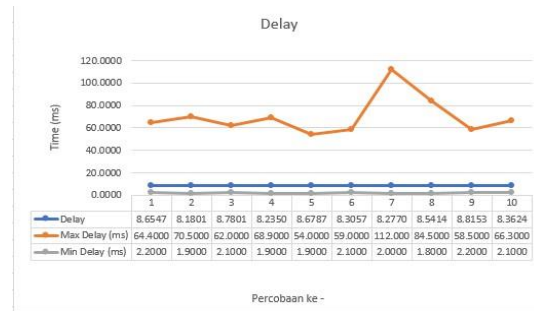


Figure 13. Grafik Delay TCP

Jitter TCP

The following is the result of measuring the QoS parameters of the TCP protocol jitter based on a predetermined test scheme. Based on the graph above, the results of the jitter of the TCP protocol obtained the maximum jitter on the 7th experiment with a value of 109,400 ms, the minimum jitter of all tests got a value of 0.0000 ms, the maximum average jitter on the 7th experiment with a value of 0.0021 ms and the minimum average jitter on the 5th experiment with a value of 0.0010.

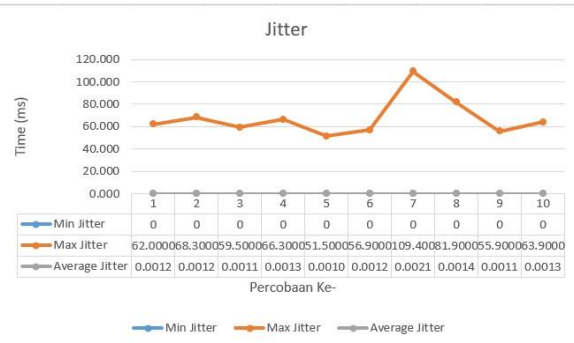


Figure 14. TCP Jitter Graph

Packet Loss

The following is the result of measuring the QoS parameters of the TCP protocol packet loss based on the test scheme that has been determined in the graph above, the packet loss results from the TCP protocol obtained the maximum packet loss on the 6th experiment with a value of 0.3355% and the minimum packet loss on the 10th experiment. with a value of 0.2599 ms.

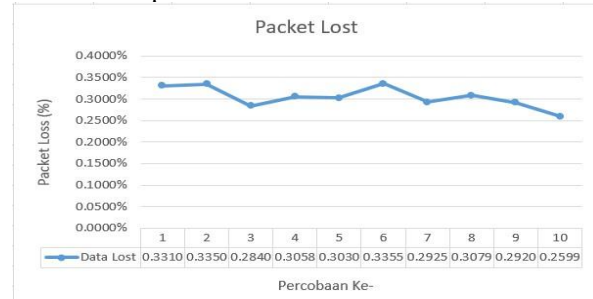


Figure 15. TCP Packet Loss Graph

d. Protocol UDP
 Delay UDP

The following is the result of measuring the QoS parameters of the UDP protocol delay. Based on the graph of the delay results from the UDP protocol, the maximum delay in the 3rd experiment with a value of 95,600 ms, the minimum delay in the 5th and 10th experiments with a value of 2,5000 ms, and the maximum average delay in the 10th experiment with a value of 4.9558 ms, and the minimum average delay on the 3rd experiment with a value of 4.6412 ms.

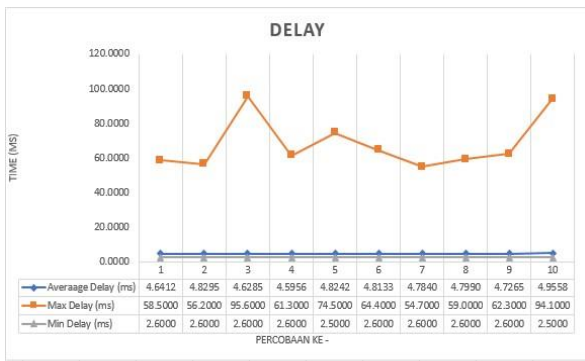


Figure 16. UDP Delay Graph

Jitter UDP

The following is the result of measuring the QoS parameters of the UDP protocol jitter. Based on the graph above, the jitter results of the UDP protocol obtained the maximum jitter on the 10th experiment with a value of 91.40 ms, the minimum jitter of all tests got a value of 0.0000 ms, the average maximum jitter in the 4th experiment with a value of 0.5781 ms, and the minimum average jitter in the 1st and 2nd experiments with a value of 0.0004 ms.

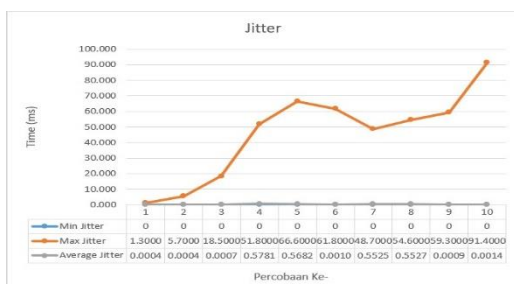


Figure 17 UDP Jitter Graph

Packet Loss

The following is the result of measuring the QoS parameter of the UDP protocol packet loss. Based on the graph above, the packet loss results from the UDP protocol obtained the maximum packet loss on the 10th experiment with a value of 0.2559% and the minimum packet loss on the 1st experiment with a value of 0.0000 %

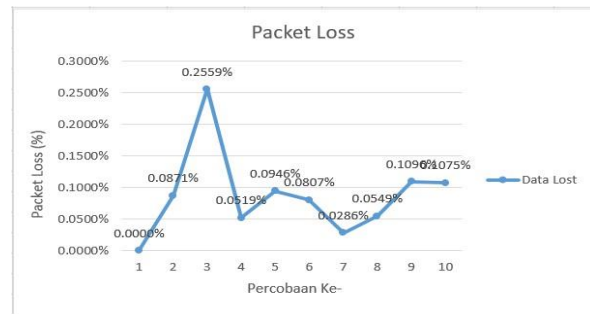


Figure 18. UDP Packet Loss Graph

QoS Recapitulation

By testing on each protocol with a predetermined scenario using QoS calculations (delay, jitter, and packet loss), the protocol used (ICMP, TCP, and UDP) in testing using VPN OVPN Has an excellent value based on the values taken from the overall average of the number of tests of each QoS parameter. The ICMP protocol has the smallest packet loss value (0%). Still, the delay parameter (5.2ms) is greater than the UDP protocol and smaller than the TCP protocol, and the jitter parameter gets a high value (4.68 ms). Higher than the TCP and UDP protocols. The TCP protocol has a relatively small packet loss value (0.3%) which ranks second to the ICMP protocol. The delay value is more excellent (8.48 ms) than the ICMP and UDP protocols, and the jitter parameter value is more minor (0.0013). of the ICMP protocol and more significant than the UDP protocol. While the TCP protocol itself has the highest packet loss value (0.3%) of the other two protocols, both the delay parameter (4.75 ms) and jitter (0.22 ms) have a relatively more nominal value than the other protocols



Figure 19. QoS Recapitulation Reports

Conclusion

The Ground Control Station security system using OPEN VPN has an excellent Quality of Service (QoS) value based on experiments using ICMP, TCP, and UDP protocols. This value is taken from the overall average number of tests for each QoS parameter; from the results of the QoS recapitulation above, UDP is more suitable for use on VPN OVPN. Then when viewed from the 4.75 ms delay and 0.22 ms jitter, the UDP protocol repositions its performance on the use of

VPN OVPN so that this is a good recommendation for security at the Ground Control Station in the Unmanned Combat Aerial Vehicle (UCAV).

References

- [1] B. J. Silalahi, A. M. Panjaitan, F. Tinus, and H. Feryandi, "Implementing Remote Sensing and Drone Mapping Technology for Land Management in Indonesia 's Boundary Zone Implementing Remote Sensing and Drone Mapping Technology for Land Management in Indonesia 's Boundary Zone Budi Jaya Silalahi, Albert Midian Panj," no. 8321, 2016.
- [2] M. Zulkifli, Moeljadi, M. Fadli, and Nurjanah, "Strengthening Indonesia Naval Base As a Aircraft Carrier At the Frontier To Increase Power of Deterrence and State Defense At Sea," *Russ. J. Agric. Socio-Economic Sci.*, vol. 117, no. 9, pp. 3–13, 2021.
- [3] V. Alcácer and V. Cruz-machado, "Engineering Science and Technology , an International Journal Scanning the Industry 4 . 0 : A Literature Review on Technologies for Manufacturing Systems," vol. 22, pp. 899–919, 2019.
- [4] B. P. Zen, R. A. G. Gultom, and A. H. S. Reksoprodjo, "Analisis Security Assessment Menggunakan Metode Penetration Testing dalam Menjaga Kapabilitas Keamanan Teknologi Informasi Pertahanan Negara," *J. Teknol. Penginderaan*, vol. 2, no. 1, pp. 105–122, 2020.
- [5] S. Luo *et al.*, "Network for hypersonic UCAV swarms," *Sci. China Inf. Sci.*, vol. 63, no. 4, pp. 1–28, 2020.
- [6] M. Mahardika, G. Nugroho, and E. Y. Prasetyo, "UAV long range surveillance system based on BiQuad antenna for the Ground Control Station," *Proc. - 14th IEEE Student Conf. Res. Dev. Adv. Technol. Humanit. SCOReD 2016*, pp. 3–7, 2017.
- [7] A. Chriki, H. Touati, H. Snoussi, and F. Kamoun, "FANET: Communication, mobility models and security issues," *Comput. Networks*, vol. 163, p. 106877, 2019.
- [8] P. Dybiec, "Mobile Networks' Support for Large-Scale UAV Services 1,2," pp. 1–19, 2022.
- [9] L. Yue, Q. Xiaohui, L. Xiaodong, and X. Qunli, "Deep reinforcement learning and its application in autonomous fitting optimization for attack areas of UCAVs," *J. Syst. Eng. Electron.*, vol. 31, no. 4, pp. 734–742, 2020.
- [10] N. F. Puspitasari and A. Dahlan, "Analisa Trafik dan Quality of Service (QoS) Untuk Optimalisasi Manajemen Bandwith (Studi Kasus : Universitas AMIKOM Yogyakarta)," *J. Ilm. Data Manaj. dan Teknol. Inf.*, vol. 148, pp. 148–162, 2017.
- [11] I. Nurrobi, K. Kusnadi, and R. Adam, "Penerapan Metode QoS (Quality of Service) untuk Menganalisa Kualitas Kinerja Jaringan Wireless," *J. Digit.*, vol. 10, no. 1, p. 47, 2020.
- [12] R. Syahputra, Rahmadi Kurnia, and Rian Ferdian, "Analysis of FHRP Design and Implementation in RIPv2 and OSPF Routing Protocols," *J. RESTI (Rekayasa Sist. dan Teknol. Informasi)*, vol. 4, no. 1, pp. 102–108, 2020.
- [13] M. Yannuzzi, X. Masip-Bruin, R. Serral-Gracia, E. Marin-Tordera, A. Sprintson, and A. Orda, "Maximum Coverage at Minimum Cost for Multi-Domain IP/MPLS Networks," no. May, pp. 1831–1839, 2008.
- [14] M. Karakus and A. Durrezi, "Quality of Service (QoS) in Software Defined Networking (SDN): A survey," *J. Netw. Comput. Appl.*, vol. 80, pp. 200–218, 2017.
- [15] Y. Firmansyah, N. Rahayu, Y. Prabowo, I. N. Y. Putro, and F. Kurniawan, "Quality of Service (QoS) Analysis for Real-Time Telemetry by IP Satellite Communication," *Proceeding - 2020 Int. Conf. Radar, Antenna, Microwave, Electron. Telecommun. ICRAMET 2020*, pp. 18–21, 2020.
- [16] ITU-T, "G.1010: End-user multimedia QoS categories," *Int. Telecommun. Union*, vol. 1010, 2001.
- [17] F. G. Becker *et al.*, "Standard Interfaces of UAV Control System (UCS) For NATO UAV Interoperability," *Syria Stud.*, vol. 7, no. 1, pp. 37–72, 2015.
- [18] R. Azhar, H. Santoso, and F. Faisal, "Analisa Quality Of Service Menggunakan Aplikasi Gnum3d sebagai Server Media Streaming," *J. Bumigora Inf. Technol.*, vol. 3, no. 1, pp. 45–55, 2021.
- [19] A. Ahad, M. Tahir, and K. L. A. Yau, "5G-based smart healthcare network: Architecture, taxonomy, challenges and future research directions," *IEEE Access*, vol. 7, pp. 100747–100762, 2019.
- [20] M. S. Bahbahani and E. Alsusa, "A Cooperative Clustering Protocol with Duty Cycling for Energy Harvesting Enabled Wireless Sensor Networks," *IEEE Trans. Wirel. Commun.*, vol. 17, no. 1, pp. 101–111, 2018.
- [21] ETSI, "Telecommunications and Internet Protocol Harmonization Over Networks (TIPHON); General aspects of Quality of Service (QoS)," *Etsi Tr 101 329 V2.1.1*, vol. 1, pp. 1–37, 1999.
- [22] A. Budiman, A. Sucipto, and A. R. Dian, "Analisis Quality of Service Routing MPLS OSPF Terhadap Gangguan Link Failure," *Techno.Com*, vol. 20, no. 1, pp. 28–37, 2021.
- [23] I. Suryani, L. Lindawati, and I. Salamah, "Analisa QOS (Quality Of Service) Jaringan Internet Di Teknik Elektro Politeknik Negeri Sriwijaya," *It J. Res. Dev.*, vol. 3, no. 1, pp. 32–42, 2018.
- [24] D. Hartono and S. Darmawan, "Pemanfaatan Unmanned Aerial Vehicle (UAV) Jenis Quadcopter untuk Percepatan Pemetaan Bidang Tanah (Studi Kasus: Desa Solokan Jeruk Kabupaten Bandung)," *Reka Geomatika*, vol. 2018, no. 1, pp. 30–40, 2019.

Network Security Analysis Simulation at the GCSin the UCAVto support the Indonesian Defense Area

By Bita Parga Zen



Network Security Analysis Simulation at the GCS in the UCAV to support the Indonesian Defense Area

Bitu Parga Zen¹, Anggi Zafia², Iwan Nofi Yono Putro³

^{1,2}Informatics Engineering, Faculty of Informatics, Telkom Purwokerto Institute of Technology

³National Research and Innovation Agency

¹bitu@ittelkom-pwt.ac.id, ²zafia@ittelkom-pwt.ac.id, ³iwan.nofi.yono.putro@brin.go.id

Abstract

An unmanned Combat Aerial Vehicle (UCAV) is an unmanned aircraft that has a serial control communication device that can be seen directly in real-time. In carrying out UCAV flights, it requires good and stable data transmission security so that signal loss does not occur during the communication process. Researchers create a concept of a security scheme in communication at the Ground Control Station (GCS) that can be used for the use of UCAV communication at long distances, using the Quality of Service (QoS) method from OPEN VPN with parameters Throughput, Packet Loss, Delay (Latency) and Jitter can determine the reliability of a UCAV communication network. Based on the results of Quality of Service (QoS) testing with OpenVPN Autopilot UCAV objects on the ICMP protocol have the smallest packet loss value of 0%, the delay parameter is 5.2ms, the jitter parameter gets a high value of 4.68 ms higher than the TCP protocol and UDP. The TCP protocol has a relatively small packet loss value of 0.3% and ranks second to the ICMP protocol, then the delay value is 8.48 ms greater than the ICMP and UDP protocols, and the jitter parameter value is 0.0013 ms smaller than the ICMP and UDP protocols. The use of VPN OVPN is a good recommendation. Still, researchers suggest that should use not only OPEN VPN but also L2TP VPN and PPTP VPN for security at the Ground Control Station at UCAV as a comparison.

Keywords: Unmanned Combat Aerial Vehicle; Quality of Service; Defense; Ground Control Station; OPEN VPN

1. Introduction

The Republic of Indonesia has maritime and land borders with ten countries in the region (Thailand, Malaysia, Vietnam, the Philippines, East Leste, Papua New Guinea, Australia, and the Republic of Palau) [1] is the 7th largest country in the world based on geographical location and has waters as one of the trades. which makes Indonesia vulnerable to border problems related to regional border issues which have always been a problem for the beneficiary parties, the real threat of armed criminal groups and separatism currently has the potential to disrupt the country's defense and security system.[2]. entering the industrial revolution 4.0 where all have used technology as the main component in various fields, especially industrial production, information, and communication technology [3]. anticipating national defense to maintain the sovereignty of the nation [4], this certainly cannot be separated from the modern defense equipment owned by developed countries, one of which is the development of unmanned aircraft technology Unmanned Combat Aerial Vehicle (UCAV).

UCAV aims to be a control serial communication tool that can be seen directly in real-time [5] and can monitor if there is a threat in the defense area. UCAV is controlled by the Ground Control Station (GCS) which can be used for the use of UCAV communications at long distances [6], but the obstacle is that it is vulnerable to interference, both from damage to the device and from security factors. In GCS, a computer network is needed for stability and security when sending and receiving data to ensure that the data sent reaches its destination [7], and the data sent is confidential.

For this reason, it is necessary to test network quality and data security on the network at GCS using Quality of Service (QoS) analysis [8]. The quality of data delivery services is the key to the attack area that affects the operational performance of the Unmanned Combat Aerial Vehicle (UCAV). Data transmission service area refers to the distance at which a missile on a UCAV, if this is neglected, can hit and damage a target with a certain probability under specific environmental parameters, including altitude, missile and target speed,

ballistic tilt angle, entry angle, and off-axis angle, in an air combat environment [9]

One way to test network quality is to perform a QoS analysis. Quality of Service (QoS) is a technology that allows network administrators to deal with the effects of congestion on packet flow traffic from various services to make optimal use of network resources, rather than increasing the physical capacity of the network. [10]. defines that QoS is a technique for managing bandwidth, delay, jitter, and packet loss for packet flow in a network [10]. The purpose of the QoS mechanism is to influence at least one of the four basic QoS parameters that have been determined. In addition to testing network stability using QoS, data transmission security needs to be implemented to ensure data safety from unauthorized parties [11]. One way to secure data on a network is to implement a Virtual Private Network (VPN) which can make a network private and secure using a public network or the internet.

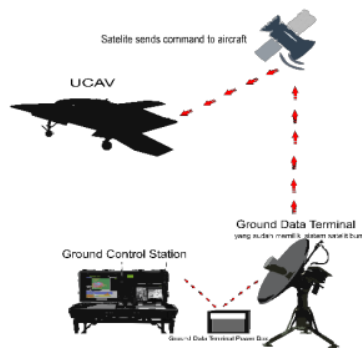


Figure 1. GCS to UCAV Communication Scheme

This is one of the basics of making simulations and analyses of QoS (Quality Of Service) throughput, delay, jitter, and packet loss stages. [12] with the addition of data security using VPN OpenVPN using the GNS3 network simulator application with the Hardware In The Loop Simulations technique which is a simulation involving some external hardware as support that will be applied to the Ground Control Station to control UCAV.

2. Research Method

This research will build a simulation and analysis of the Quality of Service on Unmanned Combat Aerial Vehicle Communication Networks for Data Security by explaining the levels or sequences starting from Throughput, delay, jitter, and packet loss at Ground Control Station Using OPENVPN with Hardware In The Loop Technique, Design This simulation will be a study that will be used for testing. and identify needs by providing detailed and accurate research figures. Figure

2 below are the stages of the process carried out by the researcher

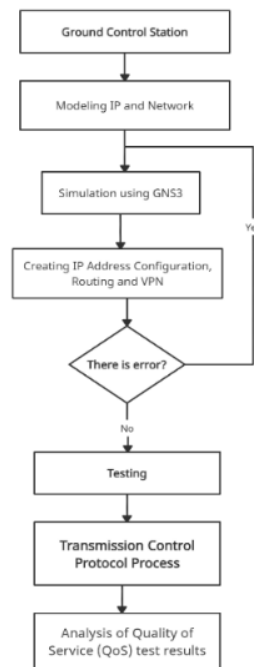


Figure 2 Research Process Flow

2.1 Modeling IP and Network

In the IP address classification stage Configure all router interfaces connected to multiple ports by assigning an IP address to each port connected to the router. [13]. regarding the IP address to be used, there are several public IPs used for certain routers and private IPs. The following table classifier IP Address used.

Table 1. IP Address Classification

Device	Interfaces	IP Adress
Router Pustekbang BRIN	ether1	103.16.223.107/29
	ether1	10.10.5.136/27
	local VPN	10.11.6.1/32
Router1	ether1	103.16.223.108/29
	ether2	103.51.131.107/29
Router 2	ether1	103.51.131.108/29
	ether2	10.0.0.1/30
Router 3	ether1	10.0.0.2/30
	ether2	10.0.0.5/30
GCS Sat	ether1	10.0.0.6/30
	ether2	10.0.0.9/30
Satellite	ether1	10.0.0.10/30
	ether2	10.0.0.13/30
Modern Sat UCAV	ether1	10.0.0.14/30
	ether2	10.0.0.17/3
Router Client	ether1	10.0.0.18/30
	ether2	10.11.12.1/29
	remote VPN	10.11.6.2/32

In Figure 2 there are 8 device routers, where the

Pustekbang BRIN router is marked with a yellow background, while the client router side is marked with a green background. for public routers or routers outside the server and client are marked with a gray background (gray). Furthermore, for the Server and Client in this simulation, Cloud2 is the Pustekbang Server and Cloud3 is the Client. Each device is external hardware connected to the GNS3 simulation software with the concept of Hardware in The Loop System. This topology design is implemented in the GNS3 software by adding a Mikrotik Router to the Qemu system contained in the GNS3. Then each router is connected and configured as needed.

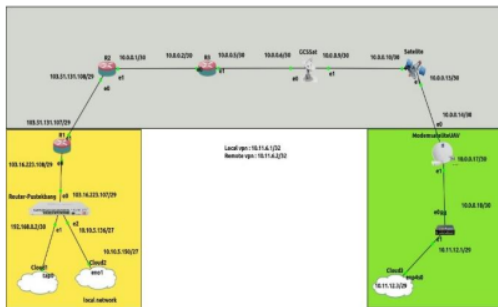


Figure 2. Communication Network Topology Design

8

2.2 Quality of Service (QoS)

Quality of Service (QoS) is an attempt to define the characteristics of a network quality by measuring how good the network quality of service is using certain parameters [14]. The International Telecommunication Union-Telecommunication (ITU-T) G.1010 standards are discussed in this paper as they relate to the quality of service (QoS) performance from telemetry data utilizing UDP protocols both with and without VPN on Ground Control Station (GCS) communication with UCAV [15]. G.1010 is an ITU-T standard. [16]

A guarantee for zero information loss or the absence of packet loss is a parameter that must be taken into account for data transfer. Then, the delay that happens must be less than 1 second and the fluctuation of the delay (jitter) that occurs must adhere to certain guidelines [15]. It is anticipated that the reliability performance of satellite communications that are intended and may be beneficial for long-range UCAV communication applications would be known from the findings of testing and analysis [17].

There are 3 levels of QoS that are often used, namely Best-effort service, which is a service model where each application for each data transmission is required without asking permission from the computer network. a service that can meet all the requirements of different QoS rules [18]. The ultimate goal of QoS is to provide a better and more planned network service with controlled dedicated bandwidth, jitter, and latency and

increase loss characteristics centered on network characteristics. [19]

a. Throughput

The total number of successful packet arrivals seen at the destination over the course of a certain time interval divided by the length of that time interval is known as throughput. A network's real capacity for data transmission is known as throughput [20]. Because throughput can be referred to as bandwidth under actual circumstances, throughput is typically always associated with bandwidth.

$$\text{Throughput} = \frac{\text{Datapacketreceived}}{\text{observationtime}}$$

Table 2. Category Throughput

Throughput	Throughput	Index
Very good	76%-100%	4
Good	51% s/d 75%	3
Fair	26% s/d 50%	2
Poor	<25%	1

b. Delay

Delay (Latency) is the time it takes for data to travel the distance from the sender to the receiver. delay can be affected by long distances, physical media, data congestion, or also long processing times [18]. The equation to calculate the delay is:

$$\text{Avaragedelay} = \frac{\text{Totaldelay}}{\text{Totalpacketsreceived}} \quad (1)$$

Table 1. Category Delay

Category Delay	Delay	Index
Very good	< 150 ms	4
Good	150 s/d 300 ms	3
Fair	301 s/d 450 ms	2
Poor	> 450 ms	1

[21]

c. Jitter

Jitter is a delay that varies over time. Jitter is referred to as a change in delay variation or the difference between the initial delay and the next delay in the data transmission period [22]. The equation for calculating the jitter is:

$$\text{Jitter} = \frac{\text{Totalvariationdelay}}{\text{Totalpacketsreceived}} \quad (2)$$

The total variation of the delay is obtained from:

$$\text{Total Variation Delay} = \text{Delay} - (\text{Average Delay}) \quad (3)$$

Table 2. Category Jitter

Category Jitter	Peak Jitter	Index
Very good	0 ms	4
Good	1 s/d 75 ms	3
Fair	76 s/d 225 ms	2
Poor	> 225 ms	1

[21]

d. Packet Loss

Packet loss is a parameter that shows the condition of a data packet that is lost from the total number of packets that can occur due to collision and congestion on a network [23]. The equation to calculate packet loss is:

$$PacketLoss = \frac{Packagesent - Packagereceived}{Receivedpackage} \times 100\% \quad (4)$$

Table 3. Category Packet Loss

Kategori Packet Loss	Packet Loss	Index
Very good	0% - 2%	4
Good	3% - 14%	3
Fair	15% - 25%	2
Poor	> 25 %	1

2.3 Open VPN type VPN configuration

VPN configuration is carried out on the BRIN pustekbang router as a VPN Open VPN Server. VPN Open VPN Server is made using the default settings on the Pustekbang router so that it can be accessed by the client side as a tunnel that connects the network. The security used only uses default encryption to be able to connect to the network without using additional security such as IPsec or certificates. The following is the VPN Server OVPN configuration that has been created on the Pustekbang router. First, to increase the security of this OpenVPN connection, we will add certificates to the server as well as the client. After we create the certificate, we will first activate the OpenVPN Server on the main gateway router at 'Server-Pustekbang'. Type in SSL Linux PPP → on the Interface Tab of the OVPN Server Command. Then to enable OpenVPN Server check the Enabled option. Also, add a certificate for OpenVPN connection in 'Router-Pustekbang' as OVPN Server in parameter 'Certificate' as shown below.

```

QEMU (ModemsatelliteUAV) - TigerVNC
[admin@000] > int pr
Flags: D - dynamic, X - disabled, R - running, S - slave
# NAME TYPE ACTUAL-RTU LZMTU
# 0 R ether1 ether 1500
# 1 R ether2 ether 1500
# 2 R ether3 ether 1500
# 3 R ether4 ether 1500
# 4 R ether5 ether 1500
[admin@000] > ip add pr
Flags: X - disabled, I - invalid, D - dynamic
# ADDRESS NETWORK INTERFACE
# 10.0.0.14/30 10.0.0.12 ether1
# 10.0.0.17/30 10.0.0.16 ether2
[admin@000] > ip route pr
Flags: X - disabled, A - active, D - dynamic,
C - connect, S - static, P - ppp, b - bgp, o - ospf, m - mnc,
B - blackhole, U - unreachable, P - prohibit
# DST-ADDRESS PREF-SRC GATEWAY DISTANCE
# 0 A S 0.0.0.0/0 10.0.0.13 1
# 1 ABC 10.0.0.12/30 10.0.0.14 ether1 0
# 2 ABC 10.0.0.16/30 10.0.0.17 ether2 0
[admin@000] >
    
```

Figure 3 OPENVPN Server Configuration

Routing configuration is also carried out on the UCAV Satellite Modem router to connect to other router networks to be connected. The following is a picture of the routing configuration used on the UCAV Satellite Modem router. As with other VPN connections, we will also create a 'PPP secret' to dial a connection from the OVPN Client

```

QEMU (Router-Pustekbang) - TigerVNC
[admin@router-pustekbang] > certificate sign CH-Template ca-crl-host do interval number
[admin@router-pustekbang] > certificate sign Server-Template ca-myCA name-server
[admin@router-pustekbang] > certificate sign Client-Template ca-myCA name-client
[admin@router-pustekbang] > certificate pr
Flags: X - private-key, L - crl, C - smart-card-key, A - authority,
I - issued, R - revoked, E - expired, T - trusted
# NAME CUR.. SUBJECT-ALT-NAME FIN..
# 0 RL A T myCA 182.. 380..
# 1 R A ser.. ser.. 326..
# 2 R A cli.. cli.. 156..
[admin@router-pustekbang] > certificate set
Client common-name keysize name subject-alt-name numbers
myCA country key-usage organization trusted
server days-valid locality state unit
[admin@router-pustekbang] > certificate set client trusted-gms
[admin@router-pustekbang] > certificate set server trusted-gms
[admin@router-pustekbang] >
    
```

Figure 4 OPENVPN Authentication Configuration

Next, do the configuration for the 'Client' as an OpenVPN Client. Because we use the terminal, we go to the PPP menu → Interfaces → Add [+] → OVPN Client. Then fill in each parameter, If OpenVPN is successfully connected then we can see the OpenVPN Server router in the PPP → Active Connections menu. There will be displayed information from client devices that have successfully connected to OpenVPN Server.

Schematic on the Ground Control Station as the main link to the Unmanned Combat Aerial Vehicle (UCAV) which functions as reconnaissance and helps map out areas [24] at the time of combined operation which has 3 main components: 1. UCAV as the main component that can be flown for monitoring by air; 2. Ground Control Station as a computer for the control room in the UCAV remote control which can be viewed with a monitor in real-time both for taking pictures and for video, then the routing configuration is carried out on the UCAV Satellite Modem router to connect other router networks to be connected. The following figure shows the routing configuration used on the UCAV Satellite Modem router. 3. Ground Data Terminal as a distance determinant, namely the antenna for connecting the Ground Control Station to UCAV

```

QEMU (ModemsatelliteUAV) - TigerVNC
[admin@000] > int pr
Flags: D - dynamic, X - disabled, R - running, S - slave
# NAME TYPE ACTUAL-RTU LZMTU
# 0 R ether1 ether 1500
# 1 R ether2 ether 1500
# 2 R ether3 ether 1500
# 3 R ether4 ether 1500
# 4 R ether5 ether 1500
[admin@000] > ip add pr
Flags: X - disabled, I - invalid, D - dynamic
# ADDRESS NETWORK INTERFACE
# 10.0.0.14/30 10.0.0.12 ether1
# 10.0.0.17/30 10.0.0.16 ether2
[admin@000] > ip route pr
Flags: X - disabled, A - active, D - dynamic,
C - connect, S - static, P - ppp, b - bgp, o - ospf, m - mnc,
B - blackhole, U - unreachable, P - prohibit
# DST-ADDRESS PREF-SRC GATEWAY DISTANCE
# 0 A S 0.0.0.0/0 10.0.0.13 1
# 1 ABC 10.0.0.12/30 10.0.0.14 ether1 0
# 2 ABC 10.0.0.16/30 10.0.0.17 ether2 0
[admin@000] >
    
```

Figure 5 UCAV satellite modem router configuration.

This research focuses on simulating the network design on GNS3 simulation software. In QoS, there are 3 main parameters used to analyze the quality of the service, namely, parameters of delay, jitter, and packet loss in the UCAV satellite modem router. In the analysis stage

of the results of the Quality of Service (QoS) test the parameters used are the parameters of delay, jitter, and packet loss in each of the tested protocols, namely the routing configuration protocol is also carried out on the UCAV Satellite Modem router to connect other router networks so that they are connected. The following figure is the routing configuration used on the UCAV Satellite Modem router.

3. Result and Discussion

ICMP testing is done by sending a ping test packet to the server using the command: "ping 10.10.10.90" for a time interval of 100 seconds and is carried out 10 times. This test aims to maximize the data later in processing QoS. Parameters

```
64 bytes from 10.10.9.90: icmp_seq=77 ttl=61 time=12.5 ms
64 bytes from 10.10.9.90: icmp_seq=78 ttl=61 time=9.45 ms
64 bytes from 10.10.9.90: icmp_seq=79 ttl=61 time=9.21 ms
64 bytes from 10.10.9.90: icmp_seq=80 ttl=61 time=7.99 ms
64 bytes from 10.10.9.90: icmp_seq=81 ttl=61 time=41.8 ms
64 bytes from 10.10.9.90: icmp_seq=82 ttl=61 time=7.8 ms
64 bytes from 10.10.9.90: icmp_seq=83 ttl=61 time=35.8 ms
64 bytes from 10.10.9.90: icmp_seq=84 ttl=61 time=11.3 ms
64 bytes from 10.10.9.90: icmp_seq=85 ttl=61 time=11.2 ms
64 bytes from 10.10.9.90: icmp_seq=86 ttl=61 time=12.8 ms
64 bytes from 10.10.9.90: icmp_seq=87 ttl=61 time=18.4 ms
64 bytes from 10.10.9.90: icmp_seq=88 ttl=61 time=7.7 ms
64 bytes from 10.10.9.90: icmp_seq=89 ttl=61 time=7.58 ms
64 bytes from 10.10.9.90: icmp_seq=90 ttl=61 time=25.8 ms
64 bytes from 10.10.9.90: icmp_seq=91 ttl=61 time=11.2 ms
64 bytes from 10.10.9.90: icmp_seq=92 ttl=61 time=21.7 ms
64 bytes from 10.10.9.90: icmp_seq=93 ttl=61 time=11.7 ms
64 bytes from 10.10.9.90: icmp_seq=94 ttl=61 time=18.5 ms
64 bytes from 10.10.9.90: icmp_seq=95 ttl=61 time=7.83 ms
64 bytes from 10.10.9.90: icmp_seq=96 ttl=61 time=14.5 ms
64 bytes from 10.10.9.90: icmp_seq=97 ttl=61 time=11.8 ms
64 bytes from 10.10.9.90: icmp_seq=98 ttl=61 time=11.8 ms
64 bytes from 10.10.9.90: icmp_seq=99 ttl=61 time=12.1 ms
64 bytes from 10.10.9.90: icmp_seq=100 ttl=61 time=11.8 ms
^C
-- 10.10.9.90 ping statistics --
100 packets transmitted, 100 received, 0% packet loss, time 99175ms
rtt min/avg/max/mdev = 6.461/12.135/41.848/5.861 ms
```

Figure 6 ICMP Protocol Test

TCP testing is done by sending packets via port 5000 using the iperf3 application to the server using the command "iperf3 -c 10.10.9.90 -p 5000 -t 100 > filename.txt". This test is carried out with a time interval of 100 seconds and is carried out ten times to get maximum data on QoS processing.

```
[ S] 77.00-79.00 sec 1.78 Mbytes 14.4 Mbits/sec 2 41.8 Kbytes
[ S] 78.00-80.00 sec 1.78 Mbytes 14.9 Mbits/sec 3 42.4 Kbytes
[ S] 79.00-81.00 sec 1.78 Mbytes 14.9 Mbits/sec 5 33.9 Kbytes
[ S] 80.00-82.00 sec 1.78 Mbytes 14.9 Mbits/sec 4 36.8 Kbytes
[ S] 81.00-83.00 sec 1.96 Mbytes 16.4 Mbits/sec 9 35.4 Kbytes
[ S] 82.00-84.00 sec 1.78 Mbytes 14.9 Mbits/sec 4 41.9 Kbytes
[ S] 83.00-85.00 sec 1.96 Mbytes 16.4 Mbits/sec 3 45.2 Kbytes
[ S] 84.00-86.00 sec 1.96 Mbytes 16.4 Mbits/sec 8 33.9 Kbytes
[ S] 85.00-87.00 sec 1.78 Mbytes 14.9 Mbits/sec 4 41.9 Kbytes
[ S] 86.00-88.00 sec 1.78 Mbytes 14.9 Mbits/sec 5 38.2 Kbytes
[ S] 87.00-89.00 sec 2.82 Mbytes 16.9 Mbits/sec 4 38.2 Kbytes
[ S] 88.00-90.00 sec 1.78 Mbytes 14.9 Mbits/sec 4 22.0 Kbytes
[ S] 89.00-91.00 sec 1.78 Mbytes 14.9 Mbits/sec 5 32.9 Kbytes
[ S] 90.00-92.00 sec 1.78 Mbytes 14.9 Mbits/sec 7 36.8 Kbytes
[ S] 91.00-93.00 sec 1.96 Mbytes 16.4 Mbits/sec 3 31.1 Kbytes
[ S] 92.00-94.00 sec 1.78 Mbytes 14.9 Mbits/sec 3 46.7 Kbytes
[ S] 93.00-95.00 sec 1.96 Mbytes 16.4 Mbits/sec 7 36.8 Kbytes
[ S] 94.00-96.00 sec 1.96 Mbytes 16.4 Mbits/sec 3 41.9 Kbytes
[ S] 95.00-97.00 sec 1.66 Mbytes 13.9 Mbits/sec 6 41.9 Kbytes
[ S] 96.00-98.00 sec 2.14 Mbytes 17.9 Mbits/sec 6 39.6 Kbytes
[ S] 97.00-99.00 sec 1.88 Mbytes 13.4 Mbits/sec 7 22.8 Kbytes
[ S] 98.00-100.00 sec 1.78 Mbytes 14.9 Mbits/sec 5 31.1 Kbytes
[ S] 99.00-100.00 sec 1.78 Mbytes 14.9 Mbits/sec 5 31.1 Kbytes

[ ID] Interval Transfer Bitrate Retc sender receiver
[ S] 0.00-100.00 sec 178 Mbytes 14.9 Mbits/sec 474
[ S] 0.00-100.00 sec 177 Mbytes 14.9 Mbits/sec

iperf3 Done.
```

Figure 7 TCP Protocol Test

UDP testing is done by sending packets via port 5000 using the iperf3 application to the server using the bandwidth obtained from the TCP protocol testing. This test is carried out with a time interval of 100 seconds and is carried out ten times to get maximum data on QoS processing.

```
[ S] 78.00-79.00 sec 1.78 Mbytes 14.9 Mbits/sec 1287
[ S] 79.00-80.00 sec 1.78 Mbytes 14.9 Mbits/sec 1286
[ S] 80.00-81.00 sec 1.78 Mbytes 14.9 Mbits/sec 1286
[ S] 81.00-82.00 sec 1.78 Mbytes 14.9 Mbits/sec 1286
[ S] 82.00-83.00 sec 1.78 Mbytes 14.9 Mbits/sec 1287
[ S] 83.00-84.00 sec 1.78 Mbytes 14.9 Mbits/sec 1286
[ S] 84.00-85.00 sec 1.78 Mbytes 14.9 Mbits/sec 1286
[ S] 85.00-86.00 sec 1.78 Mbytes 14.9 Mbits/sec 1287
[ S] 86.00-87.00 sec 1.78 Mbytes 14.9 Mbits/sec 1286
[ S] 87.00-88.00 sec 1.78 Mbytes 14.9 Mbits/sec 1286
[ S] 88.00-89.00 sec 1.78 Mbytes 14.9 Mbits/sec 1286
[ S] 89.00-90.00 sec 1.78 Mbytes 14.9 Mbits/sec 1287
[ S] 90.00-91.00 sec 1.78 Mbytes 14.9 Mbits/sec 1286
[ S] 91.00-92.00 sec 1.78 Mbytes 14.9 Mbits/sec 1286
[ S] 92.00-93.00 sec 1.78 Mbytes 14.9 Mbits/sec 1286
[ S] 93.00-94.00 sec 1.78 Mbytes 14.9 Mbits/sec 1287
[ S] 94.00-95.00 sec 1.78 Mbytes 14.9 Mbits/sec 1286
[ S] 95.00-96.00 sec 1.78 Mbytes 14.9 Mbits/sec 1286
[ S] 96.00-97.00 sec 1.78 Mbytes 14.9 Mbits/sec 1286
[ S] 97.00-98.00 sec 1.78 Mbytes 14.9 Mbits/sec 1287
[ S] 98.00-99.00 sec 1.78 Mbytes 14.9 Mbits/sec 1286
[ S] 99.00-100.00 sec 1.78 Mbytes 14.9 Mbits/sec 1286

[ ID] Interval Transfer Bitrate Jitter Lost/Total Datagrams
[ S] 0.00-100.00 sec 178 Mbytes 14.9 Mbits/sec 0.000 ms 0/128625 (0%) sender
[ S] 0.00-100.00 sec 177 Mbytes 14.9 Mbits/sec 0.782 ms 358/128625 (0.28%) receiver

iperf3 Done.
```

Figure 8 UDP Protocol Test

In the analysis phase of the Quality of Service (QoS) test results, the parameters used are the delay, jitter, and packet loss in each of the tested protocols, namely the Internet Control Message Protocol (ICMP), Transmission Control Protocol (TCP) and User Data Protocol. (UDP). The following are the results of the test graph for each protocol obtained:

- a. Throughput is the bandwidth obtained in each trial of the TCP and UDP protocols

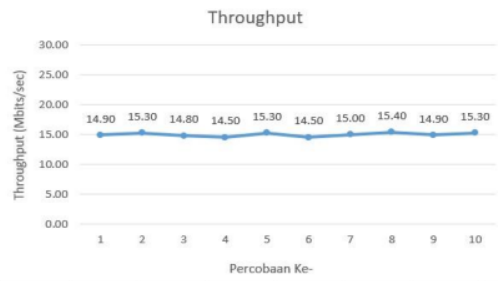


Figure 9 TCP and UDP Throughput Graph

- b. Protocol ICMP Delay ICMP

The following is the result of measuring the QoS parameters of the ICMP protocol delay based on a predetermined test scheme, the test results above the resulting graph show that the maximum average delay is 7.75 ms, the minimum average delay is 2.81 ms, and the average delay is 2.81 ms. total delay is 5.20 ms

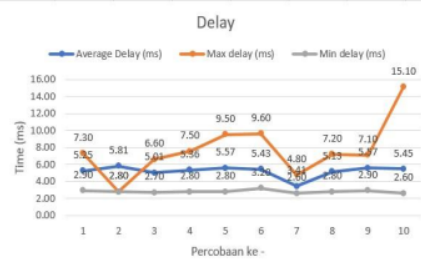


Figure 10. ICMP Delay Graph

Jitter ICMP

The following are the results of the ICMP protocol jitter parameter QoS measurements based on a predetermined test scheme. In the parameters of the jitter, the maximum average jitter is 12.75 ms, the minimum average jitter is 0 ms, and the overall average jitter is 4.68 ms.

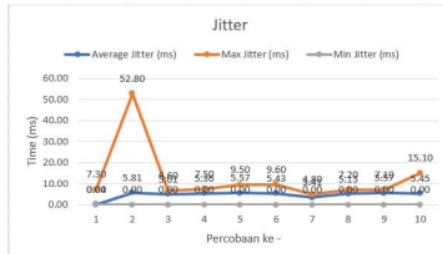


Figure 11. ICMP Jitter Graph

Packet Loss

The following is the result of measuring the QoS parameters of the ICMP packet loss protocol based on the test scheme that has been determined based on the graph below, in the ICMP packet loss protocol parameter, no packet loss was found at 0%.

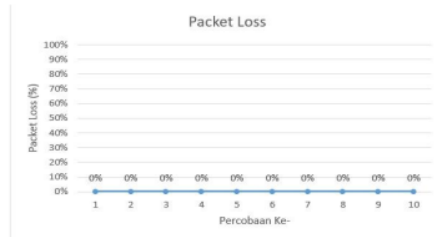


Figure 12. Grafik Packet Loss ICMP

c. Protocol TCP

Delay TCP

The following is the result of measuring the QoS parameters of the TCP protocol delay based on the test scheme that has been determined from the graph above, the delay results from the TCP protocol obtained the maximum delay on the 7th experiment with a value of 112.00 ms, the minimum delay on the 8th experiment with a value of 1.8000 ms, the maximum average delay on the 9th experiment with a value of 8.8153 ms, and the minimum average delay on the 2nd experiment with a value of 8.1801.



Figure 13. Grafik Delay TCP

Jitter TCP

The following is the result of measuring the QoS parameters of the TCP protocol jitter based on a predetermined test scheme. Based on the graph above, the results of the jitter of the TCP protocol obtained the maximum jitter on the 7th experiment with a value of 109,400 ms, the minimum jitter of all tests got a value of 0.0000 ms, the maximum average jitter on the 7th experiment with a value of 0.0021 ms and the minimum average jitter on the 5th experiment with a value of 0.0010.

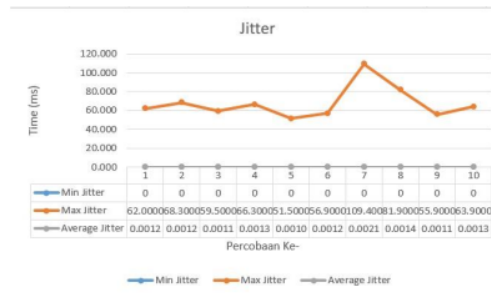


Figure 14. TCP Jitter Graph

Packet Loss

The following is the result of measuring the QoS parameters of the TCP protocol packet loss based on the test scheme that has been determined in the graph above, the packet loss results from the TCP protocol obtained the maximum packet loss on the 6th experiment with a value of 0.3355% and the minimum packet loss on the 10th experiment. with a value of 0.2599 ms.

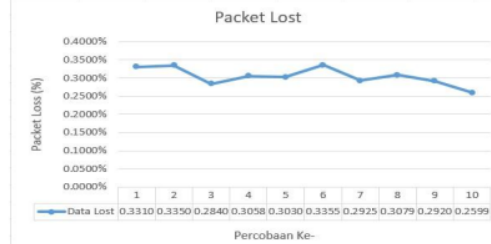


Figure 15. TCP Packet Loss Graph

d. Protocol UDP

Delay UDP

The following is the result of measuring the QoS parameters of the UDP protocol delay. Based on the graph of the delay results from the UDP protocol, the maximum delay in the 3rd experiment with a value of 95,600 ms, the minimum delay in the 5th and 10th experiments with a value of 2,5000 ms, and the maximum average delay in the 10th experiment with a value of 4.9558 ms, and the minimum average delay on the 3rd experiment with a value of 4.6412 ms.



Figure 16. UDP Delay Graph

Jitter UDP

The following is the result of measuring the QoS parameters of the UDP protocol jitter. Based on the graph above, the jitter results of the UDP protocol obtained the maximum jitter on the 10th experiment with a value of 91.40 ms, the minimum jitter of all tests got a value of 0.0000 ms, the average maximum jitter in the 4th experiment with a value of 0.5781 ms, and the minimum average jitter in the 1st and 2nd experiments with a value of 0.0004 ms.

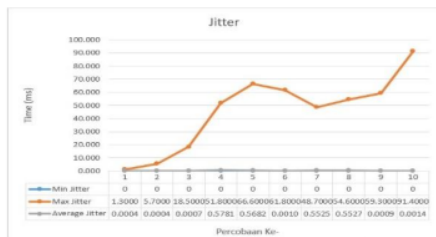


Figure 17 UDP Jitter Graph

Packet Loss

The following is the result of measuring the QoS parameter of the UDP protocol packet loss. Based on the graph above, the packet loss results from the UDP protocol obtained the maximum packet loss on the 10th experiment with a value of 0.2559% and the minimum packet loss on the 1st experiment with a value of 0.0000 %

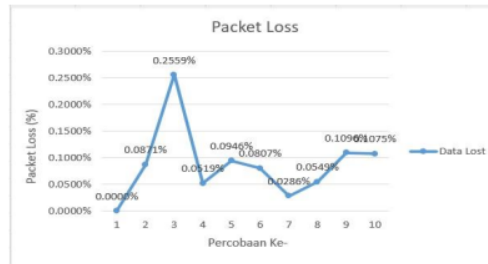


Figure 18. UDP Packet Loss Graph

QoS Recapitulation

By testing on each protocol with a predetermined scenario using QoS calculations (delay, jitter, and packet loss), the protocol used (ICMP, TCP, and UDP) in testing using VPN OVPN Has an excellent value based on the values taken from the overall average of the number of tests of each QoS parameter. The ICMP protocol has the smallest packet loss value (0%). Still, the delay parameter (5.2ms) is greater than the UDP protocol and smaller than the TCP protocol, and the jitter parameter gets a high value (4.68 ms). Higher than the TCP and UDP protocols. The TCP protocol has a relatively small packet loss value (0.3%) which ranks second to the ICMP protocol. The delay value is more excellent (8.48 ms) than the ICMP and UDP protocols, and the jitter parameter value is more minor (0.0013) of the ICMP protocol and more significant than the UDP protocol. While the TCP protocol itself has the highest packet loss value (0.3%) of the other two protocols, both the delay parameter (4.75 ms) and jitter (0.22 ms) have a relatively more nominal value than the other protocols

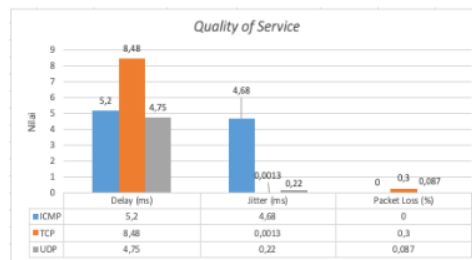


Figure 19. QoS Recapitulation Reports

Conclusion

The Ground Control Station security system using OPEN VPN has an excellent Quality of Service (QoS) value based on experiments using ICMP, TCP, and UDP protocols. This value is taken from the overall average number of tests for each QoS parameter; from the results of the QoS recapitulation above, UDP is more suitable for use on VPN OVPN. Then when viewed from the 4.75 ms delay and 0.22 ms jitter, the UDP protocol repositions its performance on the use of

VPN OVPN so that this is a good recommendation for security at the Ground Control Station in the Unmanned Combat Aerial Vehicle (UCAV).

References

- [1] B. J. Silalahi, A. M. Panjaitan, F. Tinus, and H. Feryandi, "Implementing Remote Sensing and Drone Mapping Technology for Land Management in Indonesia 's Boundary Zone Implementing Remote Sensing and Drone Mapping Technology for Land Management in Indonesia 's Boundary Zone Budi Jaya Silalahi , Albert Midian Panj,," no. 8321, 2016.
- [2] M. Zulkifli, Moeljadi, M. Fadli, and Nurjanah, "Strengthening Indonesia Naval Base As a Aircraft Carrier At the Frontier To Increase Power of Deterrence and State Defense At Sea," *Russ. J. Agric. Socio-Economic Sci.*, vol. 117, no. 9, pp. 3–13, 2021.
- [3] V. Alcácer and V. Cruz-machado, "Engineering Science and Technology , an International Journal Scanning the Industry 4 . 0 : A Literature Review on Technologies for Manufacturing Systems," vol. 22, pp. 899–919, 2019.
- [4] B. P. Zen, R. A. G. Gultom, and A. H. S. Reksoprodjo, "Analisis Security Assessment Menggunakan Metode Penetration Testing dalam Menjaga Kapabilitas Keamanan Teknologi Informasi Pertahanan Negara," *J. Teknol. Penginderaan*, vol. 2, no. 1, pp. 105–122, 2020.
- [5] S. Luo *et al.*, "Network for hypersonic UCAV swarms," *Sci. China Inf. Sci.*, vol. 63, no. 4, pp. 1–28, 2020.
- [6] M. Mahardika, G. Nugroho, and E. Y. Prasetyo, "UAV long range surveillance system based on BiQuad antenna for the Ground Control Station," *Proc. - 14th IEEE Student Conf. Res. Dev. Adv. Technol. Humanit. SCORED 2016*, pp. 3–7, 2017.
- [7] A. Chriki, H. Touati, H. Snoussi, and F. Kamoun, "FANET: Communication, mobility models and security issues," *Comput. Networks*, vol. 163, p. 106877, 2019.
- [8] P. Dybiec, "Mobile Networks' Support for Large-Scale UAV Services 1,2," pp. 1–19, 2022.
- [9] L. Yue, Q. Xiaohui, L. Xiaodong, and X. Qunli, "Deep reinforcement learning and its application in autonomous fitting optimization for attack areas of UCAVs," *J. Syst. Eng. Electron.*, vol. 31, no. 4, pp. 734–742, 2020.
- [10] N. F. Puspitasari and A. Dahlan, "Analisa Trafik dan Quality of Service (QoS) Untuk Optimalisasi Manajemen Bandwith (Studi Kasus : Universitas AMIKOM Yogyakarta)," *J. Ilm. Data Manaj. dan Teknol. Inf.*, vol. 148, pp. 148–162, 2017.
- [11] I. Nurrobi, K. Kusnadi, and R. Adam, "Penerapan Metode QoS (Quality of Service) untuk Menganalisa Kualitas Kinerja Jaringan Wireless," *J. Digit.*, vol. 10, no. 1, p. 47, 2020.
- [12] R. Syahputra, Rahmadi Kurnia, and Rian Ferdian, "Analysis of FHRRP Design and Implementation in RIPv2 and OSPF Routing Protocols," *J. RESTI (Rekayasa Sist. dan Teknol. Informasi)*, vol. 4, no. 1, pp. 102–108, 2020.
- [13] M. Yannuzzi, X. Masip-Bruin, R. Serral-Gracia, E. Marin-Tordera, A. Sprintson, and A. Orda, "Maximum Coverage at Minimum Cost for Multi-Domain IP/MPLS Networks," no. May, pp. 1831–1839, 2008.
- [14] M. Karakus and A. Durrresi, "Quality of Service (QoS) in Software Defined Networking (SDN): A survey," *J. Netw. Comput. Appl.*, vol. 80, pp. 200–218, 2017.
- [15] Y. Firmansyah, N. Rahayu, Y. Prabowo, I. N. Y. Putro, and F. Kurniawan, "Quality of Service (QoS) Analysis for Real-Time Telemetry by IP Satellite Communication," *Proceeding - 2020 Int. Conf. Radar, Antenna, Microwave, Electron. Telecommun. ICRAMET 2020*, pp. 18–21, 2020.
- [16] ITU-T, "G.1010: End-user multimedia QoS categories," *Int. Telecommun. Union*, vol. 1010, 2001.
- [17] F. G. Becker *et al.*, "Standard Interfaces of UAV Control System (UCS) For NATO UAV Interoperability," *Syria Stud.*, vol. 7, no. 1, pp. 37–72, 2015.
- [18] R. Azhar, H. Santoso, and F. Faisal, "Analisa Quality Of Service Menggunakan Aplikasi Gnump3d sebagai Server Media Streaming," *J. Bumigora Inf. Technol.*, vol. 3, no. 1, pp. 45–55, 2021.
- [19] A. Ahad, M. Tahir, and K. L. A. Yau, "5G-based smart healthcare network: Architecture, taxonomy, challenges and future research directions," *IEEE Access*, vol. 7, pp. 100747–100762, 2019.
- [20] M. S. Bahbahani and E. Alsusa, "A Cooperative Clustering Protocol with Duty Cycling for Energy Harvesting Enabled Wireless Sensor Networks," *IEEE Trans. Wirel. Commun.*, vol. 17, no. 1, pp. 101–111, 2018.
- [21] ETSI, "Telecommunications and Internet Protocol Harmonization Over Networks (TIPHON); General aspects of Quality of Service (QoS)," *Esi Tr 101 329 V2.1.1*, vol. 1, pp. 1–37, 1999.
- [22] A. Budiman, A. Sucipto, and A. R. Dian, "Analisis Quality of Service Routing MPLS OSPF Terhadap Gangguan Link Failure," *Techno.Com*, vol. 20, no. 1, pp. 28–37, 2021.
- [23] I. Suryani, L. Lindawati, and I. Salamah, "Analisa QOS (Quality Of Service) Jaringan Internet Di Teknik Elektro Politeknik Negeri Sriwijaya," *It J. Res. Dev.*, vol. 3, no. 1, pp. 32–42, 2018.
- [24] D. Hartono and S. Damawan, "Pemanfaatan Unmanned Aerial Vehicle (UAV) Jenis Quadcopter untuk Percepatan Pemetaan Bidang Tanah (Studi Kasus: Desa Solokan Jeruk Kabupaten Bandung)," *Reka Geomatika*, vol. 2018, no. 1, pp. 30–40, 2019.

Network Security Analysis Simulation at the GCSin the UCAVto support the Indonesian Defense Area

ORIGINALITY REPORT

6%

SIMILARITY INDEX

PRIMARY SOURCES

- 1 infosci.um.ac.ir 77 words — 2%
Internet
- 2 INUSAH FUSEINI. "Systematic Review of Literature on Expert System in Education.", Research Square Platform LLC, 2023 61 words — 1%
Crossref Posted Content
- 3 K A T Indah, I N K Wardana. "The implementation of radius server for wifi pass using the mechanism of access point controller in Department of Electrical Engineering building, Bali State Polytechnic", Journal of Physics: Conference Series, 2020 14 words — < 1%
Crossref
- 4 timoerok.files.wordpress.com 14 words — < 1%
Internet
- 5 www.techscience.com 12 words — < 1%
Internet
- 6 Bita Parga Zen, Iqsyahiro Kresna A, Diandra Chika Fransisca. "Applications for Detecting Plant Diseases Based on Artificial Intelligence", Sinkron, 2022 11 words — < 1%
Crossref

7 Imelda Ristanti Julia, Hendra Bayu Suseno, Luh Kesuma Wardhani, Dewi Khairani, Khodijah Hullyyah, Asep Taufik Muharram. "Performance Evaluation of First Hop Redundancy Protocol (FHRP) on VRRP, HSRP, GLBP with Routing Protocol BGP and EIGRP", 2020 8th International Conference on Cyber and IT Service Management (CITSM), 2020
Crossref 11 words — < 1%

8 ml.scribd.com
Internet 10 words — < 1%

9 Irving V Paputungan, Mahbub R Al Fitri, Unan Y Oktiawati. "DIY Home Security System: Functional and Performance Testing", 2020 6th International Conference on Science and Technology (ICST), 2020
Crossref 9 words — < 1%

10 "Proceedings of 2022 10th China Conference on Command and Control", Springer Science and Business Media LLC, 2022
Crossref 8 words — < 1%

11 es.scribd.com
Internet 8 words — < 1%

12 etheses.uin-malang.ac.id
Internet 8 words — < 1%

13 www.jodrm.eu
Internet 8 words — < 1%

EXCLUDE QUOTES ON
EXCLUDE BIBLIOGRAPHY ON

EXCLUDE SOURCES OFF
EXCLUDE MATCHES OFF

1. Paper Submission

The screenshot shows the submission page for the paper "Network Security Analysis Simulation at the GCS in the UCAV to support the Indonesian Defense Area" by Bita Parga Zen, Anggi Zafia, and Iwan Nofi Yono Putro. The page is in the "Production" stage. It features a "Submission Files" section with a table of files and a "Pre-Review Discussions" section with a table of comments.

Submission Files		Search	
13176-2	ronalw, 4412.docx (2)	August 11, 2022	Article Text

Pre-Review Discussions		Add discussion		
Name	From	Last Reply	Replies	Closed
Comments for the Editor	bitapargazen	-	0	<input type="checkbox"/>
	2022-08-09 12:28 PM			

2. Proses Review

The screenshot shows the review process for the same paper. The "Review" stage is active, and the "Round 3" tab is selected. It displays the "Round 3 Status" as "Submission accepted" and a list of "Notifications" including "Editor Decision" messages.

Round 3 Status
Submission accepted.

Notifications	
[RESTIJ] Editor Decision	2022-08-18 10:39 PM
[RESTIJ] Editor Decision	2022-08-30 08:18 AM
[RESTIJ] Editor Decision	2022-09-27 05:31 AM
[RESTIJ] Editor Decision	2022-10-23 09:46 AM

Reviewer's Attachments		Search	
13718-1	.4412-Article Text-13362-1-4-20220822 network security analysis round 3.docx	September	

Proses Copyediting

The screenshot shows the submission management interface for Jurnal RESTI (Rekayasa Sistem dan Teknologi Informasi). The submission title is "Network Security Analysis Simulation at the GCS in theUCAV to support the Indonesian Defense Area" by Bitaparga Zen, Anggi Zafia, and Iwan Nofi Yono Putro. The interface is currently in the "Copyediting" stage, with tabs for "Submission", "Review", "Copyediting", and "Production".

Copyediting Discussions

Name	From	Last Reply	Replies	Closed
Selamat, Naskah anda di terima untuk publish pada Vol. 6 No. 5. Oktober 2022	chiefojs 2022-09-27 05:31 AM	chiefojs 2022-10-01 08:24 AM	3	<input type="checkbox"/>

Copyedited Search

No Files

Proses Production

The screenshot shows a Gmail email from Dr. Ir. Yuhefizar, S.Kom., M.Kom., IPM (jurnal@iaii.or.id) to Bitaparga Zen. The subject is "[RESTI] Editor Decision". The email content is as follows:

Bitaparga Zen:

The editing of your submission, "Network Security Analysis Simulation at the Ground Control Station (GCS) in the Unmanned Combat Aerial Vehicle (UCAV) to support the Indonesian Defense Area," is complete. We are now sending it to production.

Submission URL: <http://jurnal.iaii.or.id/index.php/RESTI/authorDashboard/submission/4412>

Dr. Ir. Yuhefizar, S.Kom., M.Kom., IPM
Politeknik Negeri Padang
Phone +628126777956
jurnal@iaii.or.id

[Jurnal RESTI \(Rekayasa Sistem dan Teknologi Informasi\)](#)

Buttons: Balas, Teruskan