

Vol. 8, Nomor 3, Agustus 2022

ISSN 2407-1811 (Print)
ISSN 2550-0201 (online)



Jurnal Teknologi dan Sistem Informasi

JURTEKSI



Sekretariat Lembaga Penelitian dan Pengabdian Kepada Masyarakat

STMIK ROYAL

Jl. Prof. H. M. Yamin No. 173 Telp. 0623-41079 Fax. 0623-42366 Kisaran

Email: lppm_stmik@royal.ac.id

Editorial Team

Editorial in Chief

[Muhammad Ardiansyah Sembiring](#), STMIK Royal, Scopus ID: 57202249513

Editorial Board

[Andy Sapta](#), Universitas Terbuka, Indonesia; Scopus ID: 57202253029

[Guntur Maha Putra](#), STMIK Royal, Indonesia; Scopus ID: 57205064747

[Muhammad Yasin Simargolang](#), Universitas Asahan, Indonesia; Scopus ID: 57215910707

[Raja Tama Andri Agus](#), STMIK Royal, Indonesia; Scopus ID: 57215913336

[Tika Christy](#), STMIK Royal, Indonesia

[Tonni Limbong](#), UNIKA Santo Thomas Medan, Indonesia; ID Scopus: 57200984420

[walhidayat walhidayat](#), Universitas Lancang Kuning, Indonesia

[zulfan efendi](#), STMIK Royal, Indonesia

Lembaga Penelitian dan Pengabdian Kepada Masyarakat (LPPM) STMIK ROYAL

Copyright © LPPM STMIK ROYAL



Ciptaan disebarluaskan di bawah [Lisensi Creative Commons Atribusi-BerbagiSerupa 4.0 Internasional](#).

Vol 8, No 3 (2022)

Agustus 2022

Table of Contents

Articles

[DESIGN INFORMATION SYSTEM ONLINE REGISTRATION VACCINE COVID-19 AT RSAU DR. M. SALAMUN](#) [PDF](#) 247 - 252

DOI : [10.33330/jurteksi.v8i3.1233](https://doi.org/10.33330/jurteksi.v8i3.1233) | Abstract Views : 320 times | PDF Views : 246 times

Yuda Syahidin, Elza Dewiana Mahpud, Debora Serina Br Tarigan, Meira Hidayati

[THE DESIGN OF INFORMATION SYSTEMS FILING OUTPATIENT MEDICAL RECORDS](#) [PDF](#) 253 - 260

DOI : [10.33330/jurteksi.v8i3.1240](https://doi.org/10.33330/jurteksi.v8i3.1240) | Abstract Views : 164 times | PDF Views : 127 times

Dewi Listiawati Astuti, Hafsa Ghina Ghaida Gunawan, Irda Sari, Rina Kurniawati, Neneng Yuniarty

[ANALYSIS OF SVM AND NAIVE BAYES ALGORITHM IN CLASSIFICATION OF NAD LOANS IN SAVE AND LOAN COOPERATIVES](#) [PDF](#) 261 - 270

DOI : [10.33330/jurteksi.v8i3.1483](https://doi.org/10.33330/jurteksi.v8i3.1483) | Abstract Views : 192 times | PDF Views : 129 times

Sugeng Riyadi, Muhammad Mizan Siregar, Khairul fadhli Fadhli Margolang, Karina Andriani

[COMPARISON OF MULTILAYER PERCEPTRON'S ACTIVATION AND OP-TIMIZATION FUNCTIONS IN CLASSIFICATION OF COVID-19 PATIENTS](#) [PDF](#) 271 - 278

DOI : [10.33330/jurteksi.v8i3.1482](https://doi.org/10.33330/jurteksi.v8i3.1482) | Abstract Views : 170 times | PDF Views : 128 times

Doughlas Pardede, Ichsan Firmansyah, Meli Handayani, Meisarah Riandini, Rika Rosnelly

| | |
|--|--|
| <p>APPLICATION OF CRM METHODS FOR SALES SYSTEMS SHOES AND SANDAL PRODUCTS AT KOAKI STORE</p> <p>DOI : 10.33330/jurteksi.v8i3.1645 Abstract Views : 160 times PDF Views : 140 times</p> <p>Yuni Kartika Panjaitan, Nuriadi Manurung, Tika Christy</p> | <p>PDF 279 - 284</p> |
| <p>DEVELOPMENT OF A SYSTEM FOR FORECASTING THE AMOUNT OF DODOL SALES USING THE WEIGHTED MOVING AVERAGE METHOD</p> <p>DOI : 10.33330/jurteksi.v8i3.1678 Abstract Views : 243 times PDF Views : 196 times</p> <p>Rindi Sindia, Iqbal Kamil Siregar, MHD Ihsan</p> | <p>PDF 285 - 294</p> |
| <p>STUDENTS GRADUATION PREDICTION BASED ON ACADEMIC DATA RECORD USING THE DECISION TREE ALGORITHM C4.5 METHOD</p> <p>DOI : 10.33330/jurteksi.v8i3.1680 Abstract Views : 138 times PDF Views : 133 times</p> <p>Narita Ayu Prahastiwi, Rachmadita Andreswari, Rokhman Fauzi</p> | <p>PDF 295 - 304</p> |
| <p>COMPARISON OF DJIKSTRA ALGORITHM AND SPANNING CYCLE DETERMINING SHORTEST PATH</p> <p>DOI : 10.33330/jurteksi.v8i3.1700 Abstract Views : 162 times PDF Views : 129 times</p> <p>Erwin Panggabean, Desi Vinsensia, Wanra Tarigan, Logaraj Logaraj, Tiara W Pratiwi</p> | <p>PDF 305 - 312</p> |
| <p>THE DESIGN OF A STOCK TAKING INVENTORY APPLICATION BASED ON ANDROID</p> <p>DOI : 10.33330/jurteksi.v8i3.1529 Abstract Views : 218 times PDF Views : 204 times</p> <p>Reni Haerani, Pegie Desianasari</p> | <p>PDF 313 - 320</p> |
| <p>APPLICATION OF TOPSIS METHOD FOR DETERMINATION OF ENGLISH COURSE INSTITUTION</p> <p>DOI : 10.33330/jurteksi.v8i3.1599 Abstract Views : 119 times PDF Views : 128 times</p> <p>Sukamto Sukamto, Riki Ario Nugroho, Bayu Kharesma</p> | <p>PDF 321 - 328</p> |
| <p>IDENTIFICATION OF GLAUCOMA THROUGH RETINA IMAGES USING THE LEARNING VECTOR QUANTIZATION (LVQ) METHOD</p> <p>DOI : 10.33330/jurteksi.v8i3.1559 Abstract Views : 148 times PDF Views : 120 times</p> <p>Muhammad Rizqi Dwisapta, Tri Deviasari Wulan</p> | <p>PDF 329 - 334</p> |

[PREDICTION OF 35,000 ALL CLOTHES SALES RANGE USING WMA METHOD](#) [PDF](#)
DOI : [10.33330/jurteksi.v8i3.1733](#) | Abstract Views : 119 times | PDF Views : 86
times

335 - 342

Bella Syahputri, Adi Prijuna Lubis, Suci Andriyani

[DECISION SUPPORT SYSTEM SELECTING MONEY MARKET MUTUAL FUND USING
AHP METHOD](#) [PDF](#)

343 - 350

DOI : [10.33330/jurteksi.v8i3.1618](#) | Abstract Views : 172 times | PDF Views : 138
times

Erika Kristina, Wahyu Tisno Atmojo

[CUSTOMER RELATIONSHIP MANAGEMENT STRATEGY TO RETAIN CUSTOMERS IN
WHOLESALE MUSLIM WEBSITE BASED](#) [PDF](#)

351 - 358

DOI : [10.33330/jurteksi.v8i3.1736](#) | Abstract Views : 138 times | PDF Views : 115
times

Dyah Anisah, Novica Irawati, Iin Almeina Lubis

[TRAVELLING SALESMAN PROBLEM \(TSP\) OPTIMIZATION SEED DIS-TRIBUTION
USING GENETIC ALGORITHM](#) [PDF](#)

359 - 368

DOI : [10.33330/jurteksi.v8i3.1738](#) | Abstract Views : 163 times | PDF Views : 133
times

Vera Wati, Yuliana Yuliana, Paradise Paradise, Kusrini Kusrini

[TREND MOMENT METHOD IN PREDICTING THE NUMBER OF SALES OF MATIC
MOTORCYCLES](#) [PDF](#)

369 - 374

DOI : [10.33330/jurteksi.v8i3.1780](#) | Abstract Views : 77 times | PDF Views : 118
times

Febby Madonna Yuma

[PREDICTION OF GOODS STOCK SYSTEM IN SANTI ELECTRONIC SHOP WITH
DOUBLE MOVING AVERAGE METHOD](#) [PDF](#)

375 - 382

DOI : [10.33330/jurteksi.v8i3.1765](#) | Abstract Views : 135 times | PDF Views : 82
times

Fita Sari, Rizky Fauziah, Hommy Dorthy EIIyany

TRAVELLING SALESMAN PROBLEM (TSP) OPTIMIZATION SEED DISTRIBUTION USING GENETIC ALGORITHM

Vera Wati^{1*}, Yuliana², Paradise³, Kusri⁴

¹ Smart City Information System, Tunas Pembangunan University

² Information Technology, Shanti Bhuana Institute

³ Informatics Engineering, Telkom Institute of Technology Purwokerto

⁴ Masters in Informatics Engineering, Amikom University Yogyakarta

Email: *vera.w@lecture.utp.ac.id

Abstract: Distribution is an important the business sector, the agricultural sector for distributing seeds to ensure the location of customers selling seeds. Problems that are often encountered seed distribution process are the efficiency of the time and distance distribution. Re search will build software entering initial location data and several dynamically added consumer agents. The distance parameter uses latitude-longitude integrated on google maps and detects varying store locations, the generation of chromosomes or the best distribution path with the minimum distance route. The heuristic approach using the Genetic Algorithm imitates the concept of biological evolution of random exchange structure series. This study is to distribute 3 types of seeds with a choice of weights that have been divided into 3 areas located on the map of Indonesia using land routes. The results of the test of the population of the average fitness value tend to remain from the previous value of 1-10 the fitness value and the optimum iteration with 9-12 with an average fitness value of 44.2. Optimal results are obtained when Mr is higher than the Cr values. Thus, the Genetic Algorithm can be used for TSP seed distribution paths. 1:2 fitness evaluation compared with the usual estimates used.

Keywords: Genetic Algorithm; Route Optimization; Seed Distribution; TSP

Abstrak: Distribusi menjadi hal penting berwirausaha, salah satunya pada bidang pertanian untuk pendistribusian benih sampai lokasi tujuan. Permasalahan sering ditemui dalam proses pendistribusian adalah efektifitas, efisiensi waktu dan jarak tempuh. Sehingga penelitian akan membangun perangkat lunak dengan memasukan data titik lokasi awal dan beberapa lokasi tujuan agen konsumen ditambahkan secara dinamis. Parameter jarak menggunakan *latitude-longitude* terintegrasi pada *google maps* yang mendeteksi keberadaan lokasi, selanjutnya diketahui generasi kromosom atau jalur distribusi terbaik dengan rute minimum. Pendekatan *Heuristic* menggunakan Algoritma Genetika meniru konsep evolusi biologis deretan struktur pertukaran informasi secara acak. Tujuan dalam penelitian ini dapat mendistribusikan jenis benih dengan pilihan bobot yang telah terbagi dalam wilayah lokasi. Satu wilayah lokasi terdapat beberapa lokasi toko ditambahkan secara dinamis, dengan proses yang sudah ditentukan titik awal keberangkatan. Penelitian ini menekankan pada proses penentuan rute lokasi saja. Hasil pengujian jumlah populasi rata-rata nilai fitness cenderung bersifat tetap dari nilai sebelumnya selisih 1-10 nilai fitness dan iterasi optimum dengan 9-12 dengan rata-rata nilai fitness 44,2. Hasil optimum didapatkan ketika *Mutation rate (Mr)* lebih tinggi dibanding nilai *Crossover rate (Cr)*. Maka, Algoritma Genetika bisa digunakan untuk TSP jalur distribusi benih pengujian menghasilkan evaluasi fitness 1:2 untuk Algoritma Genetika dibandingkan dengan estimasi jarak biasa digunakan.

Kata kunci: Algoritma Genetika; Distribusi Benih; Optimalisasi Rute; TSP



INTRODUCTION

According to the Indonesian State Regulation Law no. 12 of 1992 concerning Plant Cultivation Systems are plant parts used to reproduce and reproduce plants, either tangible seeds or other materials in micro propagation [1]. Seeds contribute to the improvement of food crops [2].

Distribution activities are a process so that seeds reach consumers quickly and can be well received. The route of seed distribution location by changing locations via land transportation will consider time and cost as efficient as possible so it is necessary to find an alternative shortest path to be achieved [3]. This problem is known as the Traveling Salesman Problem (TSP), which is a trip to all the intended locations by finding a solution to calculate the shortest path or minimum travel route of all paths [4], [5].

Genetic Algorithm (GA) is a search algorithm based on natural selection and genetics mechanisms, for complex optimization solutions and can be formulated into genetic terminology [6], [7], [8], [9]. There are several terms that are often used in this method, such as individuals, namely problem solving [10], population is the set of solutions [11], [12], fitness is the quality of the solution, chromosomes are representations, and genes are part of the representation of the solution. [13]. Even some genetic operators such as crossover, mutation and natural selection are often used in research [14],[15],[16]. Performance optimization of GA adopts the concept of evolution Biology with natural selection is to combine a series of random information exchange structures to form a search algorithm with changes in talent in humans [17], [18], [19].

Research on the application of GA is

used in fertilizer distribution which only focuses on short distances [20]. Another study, modified use of GA in minimizing the distance total salesman traveling, with a *crossover* process for each operator with a better position than the partial *one cut point* and *cycle* [21]. This algorithm approach is indeed influenced by the crossover and mutation processes used, but the GA. technique good for Traveling Salesman Problem [22]. The application of TSP GA in other studies is used as a distribution method by paying attention to route efficiency, but has not paid attention to the initial initialization of user needs [23], [24].

Solving TSP can use other algorithms such as research by utilizing *hyperheuristic c* adopted by bees, namely *Artificial Bee Colony* (ABC), which does not can be applied in discrete optimization with a combination process [25]. *Ant Colony Optimization* (ACO) algorithm in local location search is utilized in other studies, resulting in less computational time and less efficient performance for dynamic problems [26]. Grouping with GA and Neural Network (NN) for classification results is very optimal, but NN can work well by paying attention to parameters [27]. The use of the Branch and Bound method in searching for the shortest route with landmarks based on characteristics and lodging places was also used in other studies, the obstacles in this study were that the starting point could not be determined and the processing was relatively long [28].

The purpose of this study, processing emphasizes the distance parameter of a distributed series of locations. But paying attention to the user's wishes by initiating the initial departure location, so that the system remains dynamic and works as needed. The genetic operator used is position-based GA recombination with *lati-*

tude-longitude distance parameters integrated on *google maps* which detects the presence of store locations. GA was chosen because it is better in the operational process of discrete distribution, always paying attention to the order to avoid repetition of locations, because it will add time. So that the final result is known for the generation of chromosomes or the best distribution path with the minimum distance route for seed distribution using the land route.

METHOD

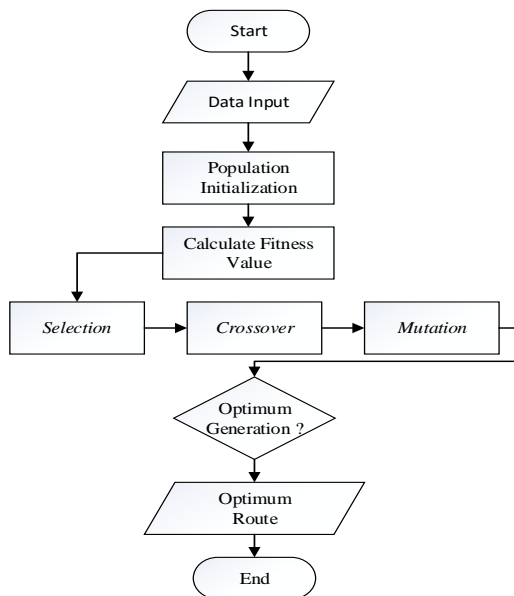


Image 1 . GA Research Scheme

Input Data

input data is in the form of area data, point of departure location, choice of goods and weights, as well as input of store location data to be distributed. The list of distributed stores stored in the database can be added dynamically.

Population Initialization

Determine parameters and enter gene values from the initial population formed. The parameter used is the location of the

customer to be distributed as a gene on the chromosome. Each chromosome in a generation represents a combination of seed distribution lines. The representation of the *value encoding number* or the value of the distance between location points is a determinant of optimization.

Calculate Fitness Value

The process of evaluating each population until the criteria are met, if not met then form a new generation by getting the highest fitness value in a row to find the most minimal value. Equality(1) (2)

$$fitness = \frac{\sum_{j=1}^N fj}{N} \tag{1}$$

Then the probability is maintained:

$$Pi = \frac{fi}{\sum_{j=1}^N fj} = \frac{fi}{fN} \tag{2}$$

In finding the minimization value of the *fitness function with the inverse equation*

Selection

The selection process takes advantage of the performance of the roulette wheel. Selection is needed to form a new generation for quality chromosomes. Equality(3)

$$Pi \frac{fi}{\sum_{j=1}^N fj} = \frac{fi}{fN} \rightarrow fitness = total\ jarak \tag{3}$$

Where:

Pi: probability to i

fi: declare fitness value

Chromosomes with lower *fitness values* need to use *inverse* so that the chromosomes have a greater probability of being selected.

crossover

Determination of the crossover probability based on the probability value of producing a new chromosome. Recombination stages:

Chromosome[x] <> Chromosomes[y] = [S→B→C→D→E→A] <> [S→C→D→E→A→B]
 Crossover result = [S→D→C→E→A→B]

This technique pays attention to the value of the crossover probability (PC), for example the PC value of 50%, it is expected that in 1 generation there will be 50% multiplied by 6 chromosomes so that 3 chromosomes from the population undergo *crossover*.

Mutation

A mutation involves a change in one or more genes in an individual, a change involving the reordering of a string with a transient bit reversal in the chromosome representation. Gene mutation stages:

Chromosome[x] = S→A→B→C→D→E
 Mutation result [x] = S→A→B→C→E→D

The mutation process uses *swapping mutation completion*, with the total length of the gene equal to the number of genes in one chromosome and the shift adjusts.

Optimum Route

The final stage, if the genetic operator processes have obtained the most optimum fitness value with the iteration process carried out several times, it will resulting distribution line with the most optimum route .

RESULTS AND DISCUSSION

The addition of location points will be entered in the regional database (see Image 2)

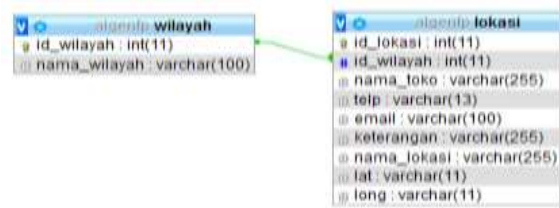


Image 2 . Database Design

The research sample, for example in the Yogyakarta area, is the starting point of PT. Source (S) with the aim of distributing PT. Adityo (A), CV Indoatri (B), CV Tani (C), Garden Shop (D), Maju Store (E). Location points are added dynamically according to the description requested on the location addition page as shown in Image 3. Then in Image 4 add a location with *latitude* and *longitude* according to the data on *google maps* .

The screenshot shows a web form for adding a location. It includes a dropdown menu for 'Wilayah', and input fields for 'Jenis', 'Nama Pelanggan', 'Nama Toko', 'No. Hp', 'Keterangan', and 'Alamat'.

Image 3 . Add Location Page

This screenshot shows a portion of the form with two input fields labeled 'Latitude' and 'Longitude', and a green 'Simpan' button at the bottom.

Image 4 . Add Location Page

Table 1 . Distance Between Locations

| LK. | S | A | B | C | D | E |
|-----|------|------|------|------|------|------|
| | (km) | (km) | (km) | (km) | (km) | (km) |

| | | | | | |
|---|----|----|----|----|----|
| S | 25 | 29 | 22 | 19 | 13 |
| A | 25 | 24 | 16 | 85 | 25 |
| B | 29 | 24 | 22 | 32 | 39 |
| C | 22 | 16 | 22 | 25 | 32 |
| D | 19 | 85 | 32 | 25 | 19 |
| E | 13 | 25 | 39 | 32 | 19 |

So that in the Yogyakarta area, a description of the location distance is obtained in the form of Table 1.

In several populations in one generation, to illustrate the calculations in this study, 5 chromosomes were obtained:

Chromosomes [1] = S → A → B → C → D → E

Chromosome [2] = S → B → C → D → E → A

Chromosome [3] = S → C → D → E → A → B

Chromosome [4] = S → D → E → A → B → C

Chromosome [5] = S → E → A → B → C → D

After initialization of the initial population is generated, then calculate the fitness value according to the data in Table 1. The process is carried out for the next genetic operation, namely

$$Fitness [1]: \tag{4}$$

$$SA + AB + BC + CD + DE + EA \\ 25 + 24 + 22 + 25 + 19 + 25 = 140$$

$$Fitness [2]: \tag{5}$$

$$SB + BC + CD + DE + EA + AB \\ 29 + 22 + 25 + 19 + 25 + 24 = 144$$

$$Fitness [3]: \tag{6}$$

$$SC + CD + DE + EA + AB + BC \\ 22 + 25 + 19 + 25 + 24 + 22 = 137$$

$$Fitness [4]: \tag{7}$$

$$SD + DE + EA + AB + BC + CD \\ 19 + 19 + 25 + 24 + 22 + 25 = 134$$

$$Fitness [5]: \tag{8}$$

$$SE + EA + AB + BC + CD + DE \\ 13 + 25 + 24 + 22 + 25 + 19 = \mathbf{128}$$

From the results obtained, the chromosome with a smaller fitness so that the chromosome has a greater probability will be re-elected with the *inverse function* . inverse equation(9)

$$Q_i = \frac{1}{Fitness(i)} \tag{9}$$

$$Q_1 = \frac{1}{140} = 0,007142$$

$$Q_2 = \frac{1}{144} = 0,006944$$

$$Q_3 = \frac{1}{137} = 0,007299$$

$$Q_4 = \frac{1}{134} = 0,007462$$

$$Q_5 = \frac{1}{128} = 0,007812$$

$$Total Q_{12345} = 0,036659$$

Probability of chromosomes to be selected a new generation, the probability value will be calculated with the following equation:(10) Probability equation:

$$P_i = \frac{Q_i}{Total Q_i} \tag{10}$$

$$P_1 = \frac{0,007142}{0,036659} = 0,1948 \rightarrow \text{Chromosome 1}$$

$$P_2 = \frac{0,006944}{0,036659} = 0,1894 \rightarrow \text{Chromosome 2}$$

$$P_3 = \frac{0,007299}{0,036659} = 0,1991 \rightarrow \text{Chromosome 3}$$

$$P_4 = \frac{0,007462}{0,036659} = 0,2035 \rightarrow \text{Chromosome 4}$$

$$P_5 = \frac{0,007812}{0,036659} = 0,2130 \rightarrow \text{Chromosome 5}$$

Based on probability calculations, chromosome 5 has the smallest fitness value and has a greater probability value than other chromosomes. This then becomes a reference if chromosome 5 must also be greater than the probability of the next generation.

with the *Roulette method* is carried out as many as the number of chromosomes to get a random value, which is 5 chromosomes. Cumulative value search with equation(11)

$$C[1] = 0,1948 \\ C[2] = 0,1948 + 0,1894 = 0,3842 \\ C[3] = 0,3842 + 0,1991 = 0,5833 \\ C[4] = 0,5833 + 0,2036 = 0,7869 \\ C[5] = 0,7869 + 0,2131 = 1,0000 \tag{11}$$

Then select a random value (R) according to the specified interval, with the value in the function(12)

$$R[1] = 0,1800$$

$$\begin{aligned}
 R[2] &= 0,4001 \\
 R[3] &= 0,2842 \\
 R[4] &= 0,5346 \\
 R[5] &= 1,1869
 \end{aligned}
 \tag{12}$$

Furthermore, the cumulative probability of C[i] is compared with the random value of R[j]. After comparison, the latest population is obtained:

Chromosome[1] : [2] = S →B →C →D →E →A
 Chromosome[2] : [1] = S →A →B →C →D →E
 Chromosome[3] : [3] = S →C →D →E →A →B
 Chromosome[4] : [5] = S →E →A →B →C →D
 Chromosome[5] : [4] = S →D →E →A →B →C

If a new population has been obtained, the next genetic operation is *crossover* or recombination of 2 (two) chromosomes. The requirement for crossing is to multiply the PC value with the chromosome, then 3 chromosomes are recombined. *Crossover* process :

Chromosomes[2] :
 Chromosome[2] << Chromosome[3] =
 [SB C DEA << SCDEAB]= [SDCEAB]

Chromosomes [3] :
 Chromosomes[3] << Chromosomes[5]=
 [SCD E AB<< SEABCD]= [SABCED]

Chromosome[5] :
 Chromosome[5] << Chromosome[2]=
 [SE ABCD << SBCDEA]= [SECDBA]

So that the population value is obtained after the *crossover*:

Chromosomes[1]= S →A →B →C →D →E
 Chromosome[2]= S →B →C →D →E →A changed
 S →D →C →E →A →B
 Chromosome [3]= S →C →D →E →A →B changed
 S →A →B →C →E →D
 Chromosome [4]= S →D →E →A →B →C
 Chromosome [5]=S →E →A →B →C →D changed
 S →E →C →D →B →A

For example, the PC value or *Crossover rate* (Cr) is 0.5 or 50%, which results in 3 chromosomes being recombined. Of course, this process in the system will be iterated until it finds the optimum result.

The last genetic operator, namely *swapping mutation*, determines the mutation process, namely if the probability or *Mutation rate* (Mr) is 100% then all chromosomes in the population undergo mutations. So this study uses 50% or the equivalent of Mr. 0.5 so that half of the gene exchange process is selected at random to be exchanged.

Chromosomes[1]= S →A →B →C →D →E
 Chromosome[1]= S →A →B →C →E →D

Chromosome[2] = S →D →C →E →A →B
 Chromosome[2] = S →D →C →E →A →B

Chromosome[3] = S →A →B →C →E →D
 Chromosome[3] = S →A →B →C →E →D

Chromosome[4] = S →D →E →A →B →C
 Chromosome[4] = S →D →B →A →E →C

Chromosome[5] = S →E →C →D →B →A
 Chromosome[5] = S →E →A →D →B →C

Similar to other genetic operators, the system will iterate until it finds the most optimum route.

Population Quantity Test

The population size test starts from the generation of 5-10 populations and is carried out 10 times.

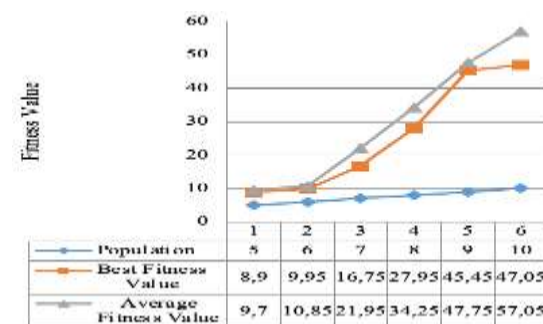


Image 4. Test Results n Population Initialization

The results are compared with the population results from the generation value of the most optimum distribution line. The combination of values used are Cr 0.5 and Mr 0.5. According to the

graph in Image 4, the population generation test shows that the highest average fitness value is found in population generation 10, this is of course due to the distribution path to be traversed. However, it should be noted that the average fitness value tends to be fixed from the previous value.

Testing the Number of Iterations in Generations

Calculation by doing iterations randomly on the generation of up to 10 times the experiment with the generation of a population of customers who are raised as many as 8 stores including the starting point. The values of Cr and Mr used are 0.5 and 0.5. In Image 5 the average value of the most optimum fitness value is 41.9 with 9 iterations, but in knowing which iteration in the range is more optimal, the researcher divides by 3 categories, the calculation is carried out by the formula(13)

$$\text{Average value fitness} = \frac{\text{Value fitness of iteration}}{\text{entity of iteration}} \quad (13)$$

$$\text{Iterasi 1 - 4} = \frac{45,4+55,2}{2} = 50,3$$

$$\text{Iterasi 5 - 8} = \frac{41,9 + 44,65 + 46,05}{3} = 48,76$$

$$\text{Iterasi 9 - 12} = \frac{41,9 + 44,65 + 46,05}{3} = 44,2$$

Testing with iterations in the generation according to the equation proves that GA performance will be more optimum if the iterations are more than the iterations in fewer generations.

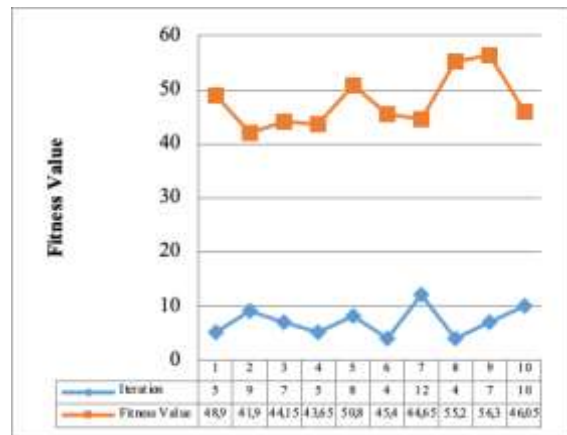


Image 5. Testing the Number of Generations

Then the most optimum results are found in iterations with 9-12 with an average fitness value of 44,2 .

Combination Test for Determination of Cr and Mr

Calculations by setting the crossover rate and mutation rate in multiples of 0.1 starting from 0 to 1 , with the experiment carried out 10 times (see Image 6). The population generation of the distributed path is 6 stores including the starting point. The most optimal *fitness value* is found in the combination of Cr 0.4 and Mr. 0.6 with an average fitness value of 13.95. However, to find out the range of combinations of Cr, Mr, which is more optimal, the researchers divided it into 2 categories of combinations carried out by the formula(14)

$$\text{Average value fitness} = \frac{\text{Value fitness of Cr Mr}}{\text{entity of Cr Mr}} \quad (14)$$

$$\text{Nilai cr 0,1 - 0,5 \& mr 0,5 - 0,9}$$

$$= \frac{23 + 15,85 + 17,85 + 13,95 + 19,1}{5} = 17,95$$

$$\text{Nilai cr 0,5 - 0,9 \& mr 0,1 - 0,5}$$

$$= \frac{19,1 + 15,15 + 24,95 + 19,1 + 20,4}{5} = 19,74$$

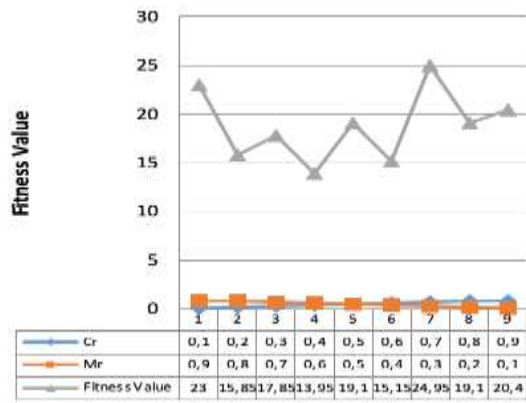


Image 6. Results of the Combination of Cr and Mr

The test results (Image 6) with a combination of Cr lower than 0.1-0.5 and higher Mr 0.5-0.9 are more optimal, because this study seeks to evaluate the value with minimization . A high Cr value will produce a generation of offspring that are similar to the parent, this makes the GA process unable to widen the search area, but with a higher Mr, it causes the mutation process to learn to shift children or distribution lines to find the most optimal without changing generations in the distribution of seed distribution lines. However, it can be concluded that in this test the difference is not so significant.

Testing the Number of Iterations in Generations

This test is carried out by comparing the route results with real conditions and the composition of the GA calculation. The test scenario is based on the results calculated with the usual distribution path by estimating the closest distance and the results obtained using GA. The population that was raised was 11 locations with a combination value of Cr 0.4 and Mr. 0.6. The available distribution channels are in Table 3.

Table 2 . Distributed Location Comparison

| Solution | Distribution Location (km) |
|-------------------|---|
| Estimated results | PS →PL →PET →JB →PT →KT →TT →PD →PN →ABT →PTU 3.3 →0.25 →0.25 →4.0 →2.6 →12.0 →1.6 →8.9 →9.3 →16.3 →21.6 =1 04.85 |
| GA Hasil results | JB →PS →PD →PT →PET →PL →PN →PTU →KT →TT →ABT 1.3 →1.5 →3.1 →3.8 →0.25 →12.0 →6.0 →17.5 →1.6 →4.7 =52.75 |

In Table 3, the test presents the average *fitness value* using GA, resulting in a more optimum solution than the estimated distribution path that is usually passed. The results compare 1:2 in favor of the more optimum GA for TSP.

CONCLUSION

The use of GA with population generation testing produces a constant tendency from the previous value with a difference of 1-10 fitness values and if the generation iteration process experiences more iterations between 9-12 iterations, the distribution line results are more optimum. The effect of the combination of Cr and Mr also affects the testing process, optimum results are obtained when the Mr value is higher than Cr because it undergoes more *mutation processes* in the distribution path for better results. The use of GA is more optimum with the results of a *fitness value* of 1:2 compared to the estimation results that are usually passed through the distribution. So, it can be concluded that GA is optimum in solving the *Traveling Salesman Problem* for seed distribution lines.

BIBLIOGRAPHY

- [1] Minister of Agriculture Regulation, "Plant Cultivation System," 2014.
- [2] JB Fant *et al.* , "What to do when we can't bank on seeds: What botanic gardens can learn from the zoo community about conserving plants in living collections," *Am. J. Bot* , vol. 103, pp. 1541–1543, 2016.
- [3] L. Han, BT Luong, and S. Ukkusuri, "An Algorithm for the One Commodity Pickup and Delivery Traveling Salesman Problem with Restricted Depot," *Networks Spat. econ.* , vol. 16, no. 3, pp. 743–768, Sept. 2016, doi:10.1007/s11067-015-9297-3.
- [4] DT Wiyanti, "Optimization Algorithm for Solving the Traveling Salesman Problem," *J. Transform.* , vol. 11, no. 1, pp. 1–6, 2013.
- [5] EE Yurek and HC Ozmutlu, "A decomposition-based iterative optimization algorithm for traveling salesman problem with drones," *Transp. res. Part C Emerg. Technol.* , vol. 91, pp. 249–262, Jun. 2018, doi:10.1016/j.trc.2018.04.009.
- [6] AA Alfaraby, AM Hilda, and M. Kamayani, "Scheduling of Memorizing the Qur'an with Genetic Algorithms," in *Proceedings of the Teknoka National Seminar* , 2018, vol. 3, no. 2502, pp. 35–41.
- [7] L. Xie and A. Yuille, "Genetic CNN," in *Computer Vision Foundation* , 2017, pp. 1379–1388.
- [8] J. Wang, OK Ersoy, M. He, and F. Wang, "Multi-offspring genetic algorithm and its application to the traveling salesman problem," *Appl. Soft Computing.* , vol. 43, pp. 415–423, Jun. 2016, doi:10.1016/j.asoc.2016.02.021.
- [9] H. Yang and X. Hu, "Wavelet neural network with improved genetic algorithm for traffic flow time series prediction," *Optik (Stuttg.)* , vol. 127, no. 19, pp. 8103–8110, Oct. 2016,
- [10] SK Pal and PP Wang, *Genetic algorithms for pattern recognition* . CRC press, 2017.
- [11] VN Wijyaningrum and WF Mahmudy, "Optimization of Ship's Route Scheduling Using Genetic Algorithm," *Indonesia. J. Electr. eng. Comput. science.* , vol. 2, no. 1, pp. 180–186, 2016.
- [12] N. Metawa, MK Hassan, and M. Elhoseny, "Genetic algorithm based model for optimizing bank lending decisions," *Expert Syst. app.* , vol. 80, pp. 75–82, 2017.
- [13] AAR Hosseinabadi, J. Vahidi, B. Saemi, AK Sangaiah, and M. Elhoseny, "Extended Genetic Algorithm for solving open-shop scheduling problems," *Soft Comput.* , vol. 23, no. 13, pp. 5099–5116, Jul. 2019, doi:10.1007/s00500-018-3177-y.
- [14] V. Ho-Huu, T. Nguyen-Thoi, T. Truong-Khac, L. Le-Anh, and T. Vo-Duy, "An improved differential evolution based on roulette wheel selection for shape and size optimization of truss structures with frequency constraints," *Neural Comput. app.* , vol. 29, no. 1, pp. 167–185, 2018.
- [15] MZ Ali, NH Awad, PN Suganthan, AM Shatnawi, and RG Reynolds, "An improved class of real-coded Genetic Algorithms for

- numerical optimization,” *Neurocomputing* , vol. 275, pp. 155–166, Jan. 2018,
- [16] AM Aibinu, H. Bello Salau, NA Rahman, MN Nwohu, and CM Akachukwu, “A novel Clustering based Genetic Algorithm for route optimization,” *Eng. science. Technol. an Int. J.* , vol. 19, no. 4, pp. 2022–2034, Dec. 2016, doi:10.1016/j.jestch.2016.08.003.
- [17] RS Zebulum, MA Pacheco, and MMB Vellasco, *Evolutionary Electronics: Automatic Design of Electronic Circuits and Systems by Genetic Algorithms* . CRC press, 2018.
- [18] ASC Alencar, ARR Neto, and JPP Gomes, “A new pruning method for extreme learning machines via genetic algorithms,” *Appl. Soft Computing.* , vol. 44, pp. 101–107, 2016.
- [19] J. Kratica, “Computing strong metric dimension of some special classes of graphs by genetic algorithms,” *Yugosl. J. Opera. res.* , vol. 18, no. 2, 2016.
- [20] S. Fachrurrazi, “Application of Genetic Algorithm in Optimizing Fertilizer Distribution at PT Pupuk Iskandar Muda Aceh Utara,” *TECHSI* , vol. 5, pp. 47–66, 2013.
- [21] A. Hussain, YS Muhammad, MN Sajid, I. Hussain, AM Shoukry, and S. Gani, “Genetic Algorithm for Traveling Salesman Problem with Modified Cycle Crossover Operator,” vol. 2017, pp. 1–8, 2017.
- [22] P. Vaishnav, N. Choudhary, and K. Jain, “Traveling Salesman Problem Using Genetic Algorithm : A Survey,” vol. 2, no. 3, pp. 105–108, 2017.
- [23] S. Rohman, L. Zakaria, A. Asmiati, and A. Nuryaman, “Optimization of Traveling Salesman Problem with Genetic Algorithm in the Case of Goods Distribution of PT. Pos Indonesia in Bandar Lampung City,” *J. Mat. Integra.* , vol. 16, no. 1, pp. 61–73, 2020.
- [24] DA Suprayogi and WF Mahmudy, “Application of Genetic Algorithm Traveling Salesman Problem with Time Window: A Case Study of Laundry Shuttle Routes,” *J. Buana Inform.* , vol. 6, no. 2, pp. 121–130, 2015.
- [25] SS Choong, L. Wong, and C. Peng, “An Artificial Bee Colony Algorithm With a Modified Choice Function for the Traveling Salesman Problem,” *Elsevier* , vol. 44, no. June 2018, pp. 622–635, 2019, doi:10.1016/j.swevo.2018.08.004.
- [26] M. Mavrovouniotis, FM Müller, S. Yang, and S. Member, “Ant Colony Optimization With Local Search for Dynamic Traveling Salesman Problems,” vol. 47, no. 7, pp. 1743–1756, 2017, doi:10.109/TCYB.2016.2556742.
- [27] R. Rais, “Classification of Pests and Diseases of Corn Plants Using Neural Networks Based on Genetic Algorithms,” in *SENIT* , 2016, vol. 1, pp. 51–56.
- [28] RH Saputra, J. Nangi, and LMB Aksara, “Application of the Branch and Bound Algorithm in Determining the Shortest Path to Search Lodging and Hotels in Kendari City,” vol. 3, no. 1, pp. 127–134, 2017.

PAPER TRAVELLING SALESMAN PROBLEM (TSP) OPTIMIZATION SEED DISTRIBUTION USING GENETIC ALGORITHM

by Paradise Paradise

Submission date: 31-Jul-2023 07:16PM (UTC+0700)

Submission ID: 2139495146

File name: M_TSP_OPTIMIZATION_SEED_DISTRIBUTION_USING_GENETIC_ALGORITHM.pdf (584.63K)

Word count: 4435

Character count: 22821

TRAVELLING SALESMAN PROBLEM (TSP) OPTIMIZATION SEED DISTRIBUTION USING GENETIC ALGORITHM

Vera Wati^{1*}, Yuliana², Paradise³, Kusrini⁴

¹ Smart City Information System, Tunas Pembangunan University

² Information Technology, Shanti Bhuana Institute

³ Informatics Engineering, Telkom Institute of Technology Purwokerto

⁴ Masters in Informatics Engineering, Amikom University Yogyakarta

Email: ^{*}vera.w@lecture.utp.ac.id

Abstract: Distribution is an important the business sector, the agricultural sector for distributing seeds to ensure the location of customers selling seeds. Problems that are often encountered seed distribution process are the efficiency of the time and distance distribution. Re search will build software entering initial location data and several dynamically added consumer agents. The distance parameter uses latitude-longitude integrated on google maps and detects varying store locations, the generation of chromosomes or the best distribution path with the minimum distance route. The heuristic approach using the Genetic Algorithm imitates the concept of biological evolution of random exchange structure series. This study is to distribute 3 types of seeds with a choice of weights that have been divided into 3 areas located on the map of Indonesia using land routes. The results of the test of the population of the average fitness value tend to remain from the previous value of 1-10 the fitness value and the optimum iteration with 9-12 with an average fitness value of 44.2. Optimal results are obtained when **Mr** is higher than the **Cr** values. Thus, the Genetic Algorithm can be used for TSP seed distribution paths. 1:2 fitness evaluation compared with the usual estimates used .

Keywords: Genetic Algorithm; Route Optimization; Seed Distribution; TSP

Abstrak: Distribusi menjadi hal penting berwirausaha, salah satunya pada bidang pertanian untuk pendistribusian benih sampai lokasi tujuan. Permasalahan sering ditemui dalam proses pendistribusian adalah efektifitas, efisiensi waktu dan jarak tempuh. Sehingga penelitian akan membangun perangkat lunak dengan memasukan data titik lokasi awal dan beberapa lokasi tujuan agen konsumen ditambahkan secara dinamis. Parameter jarak menggunakan *latitude-longitude* terintegrasi pada *google maps* yang mendeteksi keberadaan lokasi, selanjutnya diketahui generasi kromosom atau jalur distribusi terbaik dengan rute minimum. Pendekatan *Heuristic* menggunakan Algoritma Genetika meniru konsep evolusi biologis deretan struktur pertukaran informasi secara acak. Tujuan dalam penelitian ini dapat mendistribusikan jenis benih dengan pilihan bobot yang telah terbagi dalam wilayah lokasi. Satu wilayah lokasi terdapat beberapa lokasi toko ditambahkan secara dinamis, dengan proses yang sudah ditentukan titik awal keberangkatan. Penelitian ini menekankan pada proses penentuan rute lokasi saja. Hasil pengujian jumlah populasi rata-rata nilai fitness cenderung bersifat tetap dari nilai sebelumnya selisih 1-10 nilai fitness dan iterasi optimum dengan 9-12 dengan rata-rata nilai fitness 44,2. Hasil optimum didapatkan ketika *Mutation rate (Mr)* lebih tinggi dibanding nilai *Crossover rate (Cr)*. Maka, Algoritma Genetika bisa digunakan untuk TSP jalur distribusi benih pengujian menghasilkan evaluasi fitness 1:2 untuk Algoritma Genetika dibandingkan dengan estimasi jarak biasa digunakan.

Kata kunci: Algoritma Genetika; Distribusi Benih; Optimalisasi Rute; TSP



INTRODUCTION

According to the Indonesian State Regulation Law no. 12 of 1992 concerning Plant Cultivation Systems are plant parts used to reproduce and reproduce plants, either tangible seeds or other materials in micro propagation [1]. Seeds contribute to the improvement of food crops [2].

Distribution activities are a process so that seeds reach consumers quickly and can be well received. The route of seed distribution location by changing locations via land transportation will consider time and cost as efficient as possible so it is necessary to find an alternative shortest path to be achieved [3]. This problem is known as the Traveling Salesman Problem (TSP), which is a trip to all the intended locations by finding a solution to calculate the shortest path or minimum travel route of all paths [4], [5].

Genetic Algorithm (GA) is a search algorithm based on natural selection and genetics mechanisms, for complex optimization solutions and can be formulated into genetic terminology [6], [7], [8], [9]. There are several terms that are often used in this method, such as individuals, namely problem solving [10], population is the set of solutions [11], [12], fitness is the quality of the solution, chromosomes are representations, and genes are part of the representation of the solution. [13]. Even some genetic operators such as crossover, mutation and natural selection are often used in research [14], [15], [16]. Performance optimization of GA adopts the concept of evolution Biology with natural selection is to combine a series of random information exchange structures to form a search algorithm with changes in talent in humans [17], [18], [19].

Research on the application of GA is

used in fertilizer distribution which only focuses on short distances [20]. Another study, modified use of GA in minimizing the distance total salesman traveling, with a *crossover* process for each operator with a better position than the partial *one cut point* and *cycle* [21]. This algorithm approach is indeed influenced by the crossover and mutation processes used, but the GA. technique good for Traveling Salesman Problem [22]. The application of TSP GA in other studies is used as a distribution method by paying attention to route efficiency, but has not paid attention to the initial initialization of user needs [23], [24].

Solving TSP can use other algorithms such as research by utilizing *hyperheuristic c* adopted by bees, namely *Artificial Bee Colony* (ABC), which does not can be applied in discrete optimization with a combination process [25]. *Ant Colony Optimization* (ACO) algorithm in local location search is utilized in other studies, resulting in less computational time and less efficient performance for dynamic problems [26]. Grouping with GA and Neural Network (NN) for classification results is very optimal, but NN can work well by paying attention to parameters [27]. The use of the Branch and Bound method in searching for the shortest route with landmarks based on characteristics and lodging places was also used in other studies, the obstacles in this study were that the starting point could not be determined and the processing was relatively long [28].

The purpose of this study, processing emphasizes the distance parameter of a distributed series of locations. But paying attention to the user's wishes by initiating the initial departure location, so that the system remains dynamic and works as needed. The genetic operator used is position-based GA recombination with *lati-*

tude-longitude distance parameters integrated on *google maps* which detects the presence of store locations. GA was chosen because it is better in the operational process of discrete distribution, always paying attention to the order to avoid repetition of locations, because it will add time. So that the final result is known for the generation of chromosomes or the best distribution path with the minimum distance route for seed distribution using the land route.

METHOD

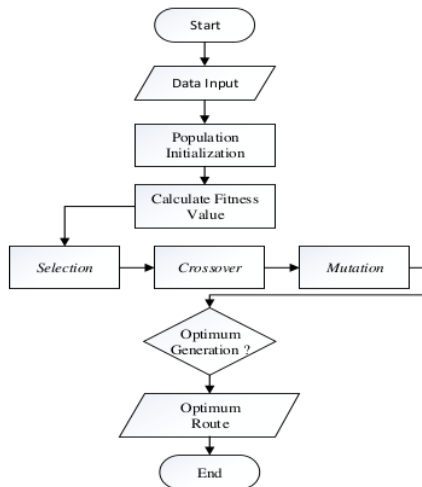


Image 1 . GA Research Scheme

Input Data

input data is in the form of area data, point of departure location, choice of goods and weights, as well as input of store location data to be distributed. The list of distributed stores stored in the database can be added dynamically.

Population Initialization

Determine parameters and enter gene values from the initial population formed. The parameter used is the location of the

customer to be distributed as a gene on the chromosome. Each chromosome in a generation represents a combination of seed distribution lines. The representation of the *value encoding number* or the value of the distance between location points is a determinant of optimization.

Calculate Fitness Value

The process of evaluating each population until the criteria are met, if not met then form a new generation by getting the highest fitness value in a row to find the most minimal value. Equality(1) (2)

$$fitness = \frac{\sum_{j=1}^N fj}{N} \tag{1}$$

Then the probability is maintained:

$$Pi = \frac{fi}{\sum_{j=1}^N fj} = \frac{fi}{fN} \tag{2}$$

In finding the minimization value of the *fitness function with the inverse equation*

Selection

The selection process takes advantage of the performance of the roulette wheel. Selection is needed to form a new generation for quality chromosomes. Equality(3)

$$Pi \frac{fi}{\sum_{j=1}^N fj} = \frac{fi}{fN} \rightarrow fitness = total\ jarak \tag{3}$$

Where:

Pi: probability to *i*

fi: declare fitness value

Chromosomes with lower *fitness values* need to use *inverse* so that the chromosomes have a greater probability of being selected.

crossover

Determination of the crossover probability based on the probability value of producing a new chromosome. Recombination stages:

Chromosome[x] < Chromosomes[y] = [S → B → C
→ D → E → A] << [S → C → D → E → A → B]
Crossover result = [S → D → C → E → A → B]

This technique pays attention to the value of the crossover probability (PC), for example the PC value of 50%, it is expected that in 1 generation there will be 50% multiplied by 6 chromosomes so that 3 chromosomes from the population undergo *crossover*.

Mutation

A mutation involves a change in one or more genes in an individual, a change involving the reordering of a string with a transient bit reversal in the chromosome representation. Gene mutation stages:

Chromosome[x] = S → A → B → C → D → E
Mutation result [x] = S → A → B → C → E → D

The mutation process uses *swap* and *mutation completion*, with the total length of the gene equal to the number of genes in one chromosome and the shift adjusts.

Optimum Route

The final stage, if the genetic operator processes have obtained the most optimum fitness value with the iteration process carried out several times, it will resulting distribution line with the most optimum route .

RESULTS AND DISCUSSION

The addition of location points will be entered in the regional database (see Image 2)

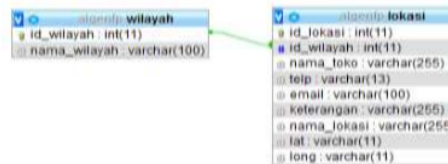


Image 2 . Database Design

The research sample, for example in the Yogyakarta area, is the starting point of PT. Source (S) with the aim of distributing PT. Adityo (A), CV Indoatri (B), CV Tani (C), Garden Shop (D), Maju Store (E). Location points are added dynamically according to the description requested on the location addition page as shown in Image 3. Then in Image 4 add a location with *latitude* and *longitude* according to the data on *google maps* .

Image 3 . Add Location Page

Image 4 . Add Location Page

Table 1 . Distance Between Locations

| LK. | S | A | B | C | D | E |
|-----|------|------|------|------|------|------|
| | (km) | (km) | (km) | (km) | (km) | (km) |

| | | | | | |
|---|----|----|----|----|----|
| S | 25 | 29 | 22 | 19 | 13 |
| A | 25 | 24 | 16 | 85 | 25 |
| B | 29 | 24 | 22 | 32 | 39 |
| C | 22 | 16 | 22 | 25 | 32 |
| D | 19 | 85 | 32 | 25 | 19 |
| E | 13 | 25 | 39 | 32 | 19 |

So that in the Yogyakarta area, a description of the location distance is obtained in the form of Table 1.

In several populations in one generation, to illustrate the calculations in this study, 5 chromosomes were obtained:

Chromosomes [1] = S → A → B → C → D → E

Chromosome [2] = S → B → C → D → E → A

Chromosome [3] = S → C → D → E → A → B

Chromosome [4] = S → D → E → A → B → C

Chromosome [5] = S → E → A → B → C → D

After initialization of the initial population is generated, then calculate the fitness value according to the data in Table 1. The process is carried out for the next genetic operation, namely

$$Fitness [1]: \tag{4}$$

$$SA + AB + BC + CD + DE + EA \\ 25 + 24 + 22 + 25 + 19 + 25 = 140$$

$$Fitness [2]: \tag{5}$$

$$SB + BC + CD + DE + EA + AB \\ 29 + 22 + 25 + 19 + 25 + 24 = 144$$

$$Fitness [3]: \tag{6}$$

$$SC + CD + DE + EA + AB + BC \\ 22 + 25 + 19 + 25 + 24 + 22 = 137$$

$$Fitness [4]: \tag{7}$$

$$SD + DE + EA + AB + BC + CD \\ 19 + 19 + 25 + 24 + 22 + 25 = 134$$

$$Fitness [5]: \tag{8}$$

$$SE + EA + AB + BC + CD + DE \\ 13 + 25 + 24 + 22 + 25 + 19 = 128$$

From the results obtained, the chromosome with a smaller fitness so that the chromosome has a greater probability will be re-elected with the *inverse function* . inverse equation(9)

$$Q_i = \frac{1}{Fitness(i)} \tag{9}$$

$$Q_1 = \frac{1}{140} = 0,007142$$

$$Q_2 = \frac{1}{144} = 0,006944$$

$$Q_3 = \frac{1}{137} = 0,007299$$

$$Q_4 = \frac{1}{134} = 0,007462$$

$$Q_5 = \frac{1}{128} = 0,007812$$

$$Total Q_{12345} = 0,036659$$

Probability of chromosomes to be selected a new generation, the probability value will be calculated with the following equation:(10) Probability equation:

$$P_i = \frac{Q_i}{Total Q_i} \tag{10}$$

$$P_1 = \frac{0,007142}{0,036659} = 0,1948 \rightarrow Chromosome 1$$

$$P_2 = \frac{0,006944}{0,036659} = 0,1894 \rightarrow Chromosome 2$$

$$P_3 = \frac{0,007299}{0,036659} = 0,1991 \rightarrow Chromosome 3$$

$$P_4 = \frac{0,007462}{0,036659} = 0,2035 \rightarrow Chromosome 4$$

$$P_5 = \frac{0,007812}{0,036659} = 0,2130 \rightarrow Chromosome 5$$

Based on probability calculations, chromosome 5 has the smallest fitness value and has a greater probability value than other chromosomes. This then becomes a reference if chromosome 5 must also be greater than the probability of the next generation.

with the *Roulette method* is carried out as many as the number of chromosomes to get a random value, which is 5 chromosomes. Cumulative value search with equation(11)

$$C[1] = 0,1948 \\ C[2] = 0,1948 + 0,1894 = 0,3842 \\ C[3] = 0,3842 + 0,1991 = 0,5833 \\ C[4] = 0,5833 + 0,2036 = 0,7869 \\ C[5] = 0,7869 + 0,2131 = 1,0000 \tag{11}$$

Then select a random value (R) according to the specified interval, with the value in the function(12)

$$R[1] = 0,1800$$

$$\begin{aligned} R[2] &= 0,4001 \\ R[3] &= 0,2842 \\ R[4] &= 0,5346 \\ R[5] &= 1,1869 \end{aligned} \quad (12)$$

Furthermore, the cumulative probability of C[i] is compared with the random value of R[j]. After comparison, the latest population is obtained:

Chromosome[1] : [2] = S → B → C → D → E → A
 Chromosome[2] : [1] = S → A → B → C → D → E
 Chromosome[3] : [3] = S → C → D → E → A → B
 Chromosome[4] : [5] = S → E → A → B → C → D
 Chromosome[5] : [4] = S → D → E → A → B → C

If a new population has been obtained, the next genetic operation is *crossover* or recombination of 2 (two) chromosomes. The requirement for crossing is to multiply the PC value with the chromosome, then 3 chromosomes are recombined. *Crossover* process :

Chromosomes[2] :
 Chromosome[2] << Chromosome[3] =
 [SB C DEA << SCDEAB] = [SDCEAB]

Chromosomes [3] :
 Chromosomes[3] << Chromosomes[5]=
 [SCD E AB << SEABCD] = [SABCED]

Chromosome[5] :
 Chromosome[5] << Chromosome[2]=
 [SE ABCD << SBCDEA] = [SECDBA]

So that the population value is obtained after the *crossover*:

Chromosomes[1]= S → A → B → C → D → E
 Chromosome[2]= S → B → C → D → E → A changed
 S → D → C → E → A → B
 Chromosome [3]= S → C → D → E → A → B changed
 S → A → B → C → E → D
 Chromosome [4]= S → D → E → A → B → C
 Chromosome [5]=S → E → A → B → C → D changed
 S → E → C → D → B → A

For example, the PC value or *Crossover rate* (Cr) is 0.5 or 50%, which results in 3 chromosomes being recombined. Of course, this process in the system will be iterated until it finds the optimum result.

The last genetic operator, namely *swapping mutation*, determines the mutation process, namely if the probability or *Mutation rate* (Mr) is 100% then all chromosomes in the population undergo mutations. So this study uses 50% or the equivalent of Mr. 0.5 so that half of the gene exchange process is selected at random to be exchanged.

Chromosomes[1]= S → A → B → C → D → E
 Chromosome[1]= S → A → B → C → E → D

Chromosome[2] = S → D → C → E → A → B
 Chromosome[2] = S → D → C → E → A → B

Chromosome[3] = S → A → B → C → E → D
 Chromosome[3] = S → A → B → C → E → D

Chromosome[4] = S → D → E → A → B → C
 Chromosome[4] = S → D → B → A → E → C

Chromosome[5] = S → E → C → D → B → A
 Chromosome[5] = S → E → A → D → B → C

Similar to other genetic operators, the system will iterate until it finds the most optimum route.

Population Quantity Test

The population size test starts from the generation of 5-10 populations and is carried out 10 times.

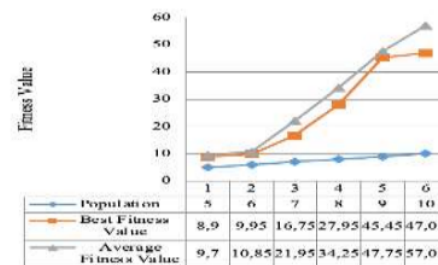


Image 4. Test Results n Population Initialization

The results are compared with the population results from the generation value of the most optimum distribution line. The combination of values used are Cr 0.5 and Mr 0.5. According to the

graph in Image 4, the population generation test shows that the highest average fitness value is found in population generation 10, this is of course due to the distribution path to be traversed. However, it should be noted that the average fitness value tends to be fixed from the previous value.

Testing the Number of Iterations in Generations

Calculation by doing iterations randomly on the generation of up to 10 times the experiment with the generation of a population of customers who are raised as many as 8 stores including the starting point. The values of Cr and Mr used are 0.5 and 0.5. In Image 5 the average value of the most optimum fitness value is 41.9 with 9 iterations, but in knowing which iteration in the range is more optimal, the researcher divides by 3 categories, the calculation is carried out by the formula(13)

$$\text{Average value fitness} = \frac{\text{Value fitness of iteration}}{\text{entity of iteration}} \quad (13)$$

$$\text{Iterasi 1 - 4} = \frac{45,4+55,2}{2} = 50,3$$

$$\text{Iterasi 5 - 8} = \frac{41,9 + 44,65 + 46,05}{3} = 48,76$$

$$\text{Iterasi 9 - 12} = \frac{41,9 + 44,65 + 46,05}{3} = 44,2$$

Testing with iterations in the generation according to the equation proves that GA performance will be more optimum if the iterations are more than the iterations in fewer generations.

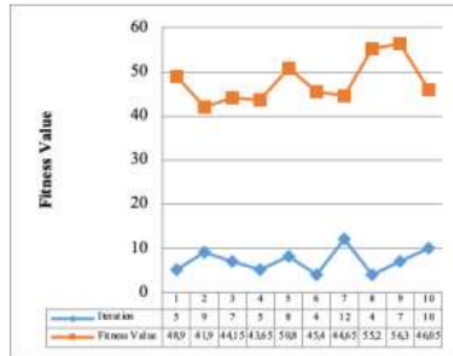


Image 5. Testing the Number of Generations

Then the most optimum results are found in iterations with 9-12 with an average fitness value of 44,2 .

Combination Test for Determination of Cr and Mr

Calculations by setting the crossover rate and mutation rate in multiples of 0.1 starting from 0 to 1 , with the experiment carried out 10 times (see Image 6). The population generation of the distributed path is 6 stores including the starting point. The most optimal *fitness value* is found in the combination of Cr 0.4 and Mr. 0.6 with an average fitness value of 13.95. However, to find out the range of combinations of Cr, Mr, which is more optimal, the researchers divided it into 2 categories of combinations carried out by the formula(14)

$$\text{Average value fitness} = \frac{\text{Value fitness of Cr Mr}}{\text{entity of Cr Mr}} \quad (14)$$

$$\text{Nilai cr 0,1 - 0,5 \& mr 0,5 - 0,9}$$

$$= \frac{23 + 15,85 + 17,85 + 13,95 + 19,1}{5} = 17,95$$

$$\text{Nilai cr 0,5 - 0,9 \& mr 0,1 - 0,5}$$

$$= \frac{19,1 + 15,15 + 24,95 + 19,1 + 20,4}{5} = 19,74$$

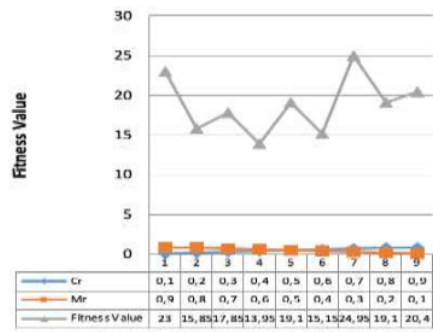


Image 6. Results of the Combination of Cr and Mr

The test results (Image 6) with a combination of Cr lower than 0.1-0.5 and higher Mr 0.5-0.9 are more optimal, because this study seeks to evaluate the value with minimization. A high Cr value will produce a generation of offspring that are similar to the parent, this makes the GA process unable to widen the search area, but with a higher Mr, it causes the mutation process to learn to shift children or distribution lines to find the most optimal without changing generations in the distribution of seed distribution lines. However, it can be concluded that in this test the difference is not so significant.

Testing the Number of Iterations in Generations

This test is carried out by comparing the route results with real conditions and the composition of the GA calculation. The test scenario is based on the results calculated with the usual distribution path by estimating the closest distance and the results obtained using GA. The population that was raised was 11 locations with a combination value of Cr 0.4 and Mr. 0.6. The available distribution channels are in Table 3.

Table 2 . Distributed Location Comparison

| Solution | Distribution Location (km) |
|-------------------|--|
| Estimated results | PS → PL → PET → JB → PT → KT → TT → PD → PN → ABT → PTU 3.3 → 0.25 → 0.25 → 4.0 → 2.6 → 12.0 → 1.6 → 8.9 → 9.3 → 16.3 → 21.6 =1 04.85 |
| GA Hasil results | JB → PS → PD → PT → PET → PL → PN → PTU → KT → TT → ABT 1.3 → 1.5 → 3.1 → 3.8 → 0.25 → 12.0 → 6.0 → 17.5 → 1.6 → 4.7 =52.75 |

In Table 3, the test presents the average *fitness value* using GA, resulting in a more optimum solution than the estimated distribution path that is usually passed. The results compare 1:2 in favor of the more optimum GA for TSP.

CONCLUSION

The use of GA with population generation testing produces a constant tendency from the previous value with a difference of 1-10 fitness values and if the generation iteration process experiences more iterations between 9-12 iterations, the distribution line results are more optimum. The effect of the combination of Cr and Mr also affects the testing process, optimum results are obtained when the Mr value is higher than Cr because it undergoes more *mutation processes* in the distribution path for better results. The use of GA is more optimum with the results of a *fitness value* of 1:2 compared to the estimation results that are usually passed through the distribution. So, it can be concluded that GA is optimum in solving the *Traveling Salesman Problem* for seed distribution lines.

BIBLIOGRAPHY

- [1] Minister of Agriculture Regulation, "Plant Cultivation System," 2014.
- [2] JB Fant *et al.*, "What to do when we can't bank on seeds: What botanic gardens can learn from the zoo community about conserving plants in living collections," *Am. J. Bot.*, vol. 103, pp. 1541–1543, 2016.
- [3] L. Han, BT Luong, and S. Ukkusuri, "An Algorithm for the One Commodity Pickup and Delivery Traveling Salesman Problem with Restricted Depot," *Networks Spat. econ.*, vol. 16, no. 3, pp. 743–768, Sept. 2016, doi:10.1007/s11067-015-9297-3.
- [4] DT Wiyanti, "Optimization Algorithm for Solving the Traveling Salesman Problem," *J. Transform.*, vol. 11, no. 1, pp. 1–6, 2013.
- [5] EE Yurek and HC Ozmutlu, "A decomposition-based iterative optimization algorithm for traveling salesman problem with drones," *Transp. res. Part C Emerg. Technol.*, vol. 91, pp. 249–262, Jun. 2018, doi:10.1016/j.trc.2018.04.009.
- [6] AA Alfaraby, AM Hilda, and M. Kamayani, "Scheduling of Memorizing the Qur'an with Genetic Algorithms," in *Proceedings of the Teknoka National Seminar*, 2018, vol. 3, no. 2502, pp. 35–41.
- [7] L. Xie and A. Yuille, "Genetic CNN," in *Computer Vision Foundation*, 2017, pp. 1379–1388.
- [8] J. Wang, OK Ersoy, M. He, and F. Wang, "Multi-offspring genetic algorithm and its application to the traveling salesman problem," *Appl. Soft Computing.*, vol. 43, pp. 415–423, Jun. 2016, doi:10.1016/j.asoc.2016.02.021.
- [9] H. Yang and X. Hu, "Wavelet neural network with improved genetic algorithm for traffic flow time series prediction," *Optik (Stuttg.)*, vol. 127, no. 19, pp. 8103–8110, Oct. 2016.
- [10] SK Pal and PP Wang, *Genetic algorithms for pattern recognition*. CRC press, 2017.
- [11] VN Wijyaningrum and WF Mahmudy, "Optimization of Ship's Route Scheduling Using Genetic Algorithm," *Indonesia. J. Electr. eng. Comput. science.*, vol. 2, no. 1, pp. 180–186, 2016.
- [12] N. Metawa, MK Hassan, and M. Elhoseny, "Genetic algorithm based model for optimizing bank lending decisions," *Expert Syst. app.*, vol. 80, pp. 75–82, 2017.
- [13] AAR Hosseinabadi, J. Vahidi, B. Saemi, AK Sangaiah, and M. Elhoseny, "Extended Genetic Algorithm for solving open-shop scheduling problems," *Soft Comput.*, vol. 23, no. 13, pp. 5099–5116, Jul. 2019, doi:10.1007/s00500-018-3177-y.
- [14] V. Ho-Huu, T. Nguyen-Thoi, T. Truong-Khac, L. Le-Anh, and T. Vo-Duy, "An improved differential evolution based on roulette wheel selection for shape and size optimization of truss structures with frequency constraints," *Neural Comput. app.*, vol. 29, no. 1, pp. 167–185, 2018.
- [15] MZ Ali, NH Awad, PN Suganthan, AM Shatnawi, and RG Reynolds, "An improved class of real-coded Genetic Algorithms for

- numerical optimization,” *Neurocomputing* , vol. 275, pp. 155–166, Jan. 2018,
- [16] AM Aibinu, H. Bello Salau, NA Rahman, MN Nwohu, and CM Akachukwu, “A novel Clustering based Genetic Algorithm for route optimization,” *Eng. science. Technol. an Int. J. .* , vol. 19, no. 4, pp. 2022–2034, Dec. 2016, doi:10.1016/j.jestch.2016.08.003.
- [17] RS Zebulum, MA Pacheco, and MMB Vellasco, *Evolutionary Electronics: Automatic Design of Electronic Circuits and Systems by Genetic Algorithms* . CRC press, 2018.
- [18] C Alencar, ARR Neto, and JPP Gomes, “A new pruning method for extreme learning machines via genetic algorithms,” *Appl. Soft Computing.* , vol. 44, pp. 101–107, 2016.
- [19] J. Kratica, “Computing strong metric dimension of some special classes of graphs by genetic algorithms,” *Yugosl. J. Opera. res.* , vol. 18, no. 2, 2016.
- [20] S. Fachrurrazi, “Application of Genetic Algorithm in Optimizing Fertilizer Distribution at PT Pupuk Iskandar Muda Aceh Utara,” *TECHSI* , vol. 5, pp. 47–66, 2013.
- [21] Hussain, YS Muhammad, MN Sajid, I. Hussain, AM Shoukry, and S. Gani, “Genetic Algorithm for Traveling Salesman Problem with Modified Cycle Crossover Operator,” vol. 2017, pp. 1–8, 2017.
- [22] P. Vaishnav, N. Choudhary, and K. Jain, “Traveling Salesman Problem Using Genetic Algorithm : A Survey,” vol. 2, no. 3, pp. 105–108, 2017.
- [23] S. Rohman, L. Zakaria, A. Asmiati, and A. Nuryaman, “Optimization of Traveling Salesman Problem with Genetic Algorithm in the Case of Goods Distribution of PT. Pos Indonesia in Bandar Lampung City,” *J. Mat. Integra.* , vol. 16, no. 1, pp. 61–73, 2020.
- [24] DA Suprayogi and WF Mahmudy, “Application of Genetic Algorithm Traveling Salesman Problem with Time Window: A Case Study of Laundry Shuttle Routes,” *J. Buana Inform.* , vol. 6, no. 2, pp. 121–130, 2015.
- [25] SS Choong, L. Wong, and C. Peng, “An Artificial Bee Colony Algorithm With a Modified Choice Function for the Traveling Salesman Problem,” *Elsevier* , vol. 44, no. June 2018, pp. 622–635, 2018, doi:10.1016/j.swevo.2018.08.004.
- [26] M. Mavrovouniotis, FM Müller, S. Yang, and S. Member, “Ant Colony Optimization With Local Search for Dynamic Traveling Salesman Problems,” vol. 47, no. 7, pp. 1743–1756, 2017, doi:10.109/TCYB.2016.2556742.
- [27] R. Rais, “Classification of Pests and Diseases of Corn Plants Using Neural Networks Based on Genetic Algorithms,” in *SENIT* , 2016, vol. 1, pp. 51–56.
- [28] RH Saputra, J. Nangi, and LMB Aksara, “Application of the Branch and Bound Algorithm in Determining the Shortest Path to Search Lodging and Hotels in Kendari City,” vol. 3, no. 1, pp. 127–134, 2017.

PAPER TRAVELLING SALESMAN PROBLEM (TSP) OPTIMIZATION SEED DISTRIBUTION USING GENETIC ALGORITHM

ORIGINALITY REPORT

13%

SIMILARITY INDEX

10%

INTERNET SOURCES

9%

PUBLICATIONS

10%

STUDENT PAPERS

PRIMARY SOURCES

- | | | |
|---|---|-----|
| 1 | Submitted to Universitas International Batam Student Paper | 7% |
| 2 | Anaika Sibley. "Developing a generic genetic algorithm", Proceedings of the 2002 annual ACM SIGAda international conference on Ada The engineering of correct and reliable software for real-time & distributed systems using Ada and related technologies - SIGAda 02 SIGAda 02, 2002 Publication | 1% |
| 3 | Submitted to Cork Institute of Technology Student Paper | 1% |
| 4 | L. Sekanina. "Towards evolvable IP cores for FPGAs", NASA/DoD Conference on Evolvable Hardware, 2003. Proceedings., 2003 Publication | <1% |
| 5 | Wen-Wen Qian, Xing Zhao, Kang Ji. "Region Division in Logistics Distribution With a Two-Stage Optimization Algorithm", IEEE Access, 2020 | <1% |

6

real-j.mtak.hu

Internet Source

<1 %

7

Bahaeddin Türkoğlu, Hasan Eroğlu. "Chapter 3 Genetic Algorithm for Route Optimization", Springer Science and Business Media LLC, 2023

Publication

<1 %

8

bucky.stanford.edu

Internet Source

<1 %

9

Abdul Hadi Alaidi, Chen S Soong Der, Yeng Weng Leong. "Systematic Review of Enhancement of Artificial Bee Colony Algorithm Using Ant Colony Pheromone", International Journal of Interactive Mobile Technologies (ijIM), 2021

Publication

<1 %

10

repositor.umm.ac.id

Internet Source

<1 %

11

www.dhn.mar.mil.br

Internet Source

<1 %

12

journal.uad.ac.id

Internet Source

<1 %

13

scholar.uwindsor.ca

Internet Source

<1 %

14 Ievgen Fedorchenko, Andrii Oliinyk, Alexander Stepanenko, Tetiana Fedoronchak, Anastasia Kharchenko, Vasyl Donenko. "Development of a Genetic Method for Determining the Optimal Location of Power Supply Objects", 2020 IEEE International Conference on Problems of Infocommunications. Science and Technology (PIC S&T), 2020
Publication <1 %

15 Submitted to University of Birmingham
Student Paper <1 %

16 api.crossref.org
Internet Source <1 %

17 ojs.pnb.ac.id
Internet Source <1 %

18 ZULQURNAIN SABIR, MUHAMMAD ASIF ZAHOOOR RAJA, S. R. MAHMOUD, JUAN L. G. GUIRAO, JUAN M. SÁNCHEZ. "A HEURISTIC COMPUTING APPROACH USING SEQUENTIAL QUADRATIC PROGRAMMING TO SOLVE THE FIFTH KIND OF INDUCTION MOTOR MODEL", *Fractals*, 2022
Publication <1 %

19 ebin.pub
Internet Source <1 %

20 scholarworks.sjsu.edu
Internet Source <1 %

Exclude quotes On

Exclude matches Off

Exclude bibliography On