

IEEE International Conference on
Communications, Networks and Satellite

COMNETSAT

2021



PROCEEDINGS

PURWOKERTO, INDONESIA

Online Conference, on July 17-18, 2021

Committee

Advisory

Arief Hamdani Gunawan, SMIEEE (Telkom Indonesia)
Dr. Arifin Nugroho, SMIEEE (Chair, IEEE AERS/GRSS Indonesia Joint Chapter)
Prof. Dr. Ir. Gamantyo Hendratoro, Ph.D. (Institut Teknologi Sepuluh November)
Dr. Ing. Wiseto P. Agung (ARS University, Fakultas Teknologi Informasi)
Dr. Muhammad Ary Murti (Telkom University)
Dr. Ing. Wahyudi Hasbi, S.Si., M.Kom. (LAPAN)

General Chair

Dr. Ali Rokhman, M.Si. (Institut Teknologi Telkom Purwokerto)

General Co-Chair

Dr. Anggun Fitriani Isnawati, M. Eng. (Institut Teknologi Telkom Purwokerto)

Secretary

Solichah Larasati, S.T, M.T. (Institut Teknologi Telkom Purwokerto)
Utti Marina Rifanti, S.Si., M.Sc. (Institut Teknologi Telkom Purwokerto)

Treasurer

Citra Wiguna, S.Kom., M.Kom. (Institut Teknologi Telkom Purwokerto)
Khoirun Ni'amah, S.T., M.T. (Institut Teknologi Telkom Purwokerto)

Technical Program Committee (TPC) Chair

Dr. Tenia Wahyuningrum, M. Kom.

Technical Program Committee (TPC) Co-Chair

Dr. Helmy Widyantara, S.Kom.,M.Eng. (Insitut Teknologi Telkom Surabaya)
Dimas Adiputra, B.Sc.,M.Phil.,Ph.D. (Insitut Teknologi Telkom Surabaya)

Publication Chair

Danny Kurnianto, S.T.,M.Eng. (Institut Teknologi Telkom Purwokerto)

Publication Co-Chair

Kukuh Nugroho, S.T., M.T. (Institut Teknologi Telkom Purwokerto)
Agi Prasetiagi, S.Kom., M.Kom. (Institut Teknologi Telkom Purwokerto)
Alfin Hikmaturokhman, S.T, M.T. (Institut Teknologi Telkom Purwokerto)

Event

Hari Widi Utomo, S.Pd., M.Ed. (Institut Teknologi Telkom Purwokerto)
Novanda Alim Setya, S.S., M.Hum. (Institut Teknologi Telkom Purwokerto)

Public Relations

Mas Aly Afandi, S.ST., M.T. (Institut Teknologi Telkom Purwokerto)
Diandra Chika Fransisca, S.Si., M.Sc. (Institut Teknologi Telkom Purwokerto)

Web Master & Graphic Design

Novian Adi Prasetyo, S.Kom, M.Kom. (Institut Teknologi Telkom Purwokerto)
Galih Putra Pamungkas, M.Sn. (Institut Teknologi Telkom Purwokerto)

Technical Program Committee (TPC) Members

Prof. Abdallah Makhoul (University of Franche-Comté, France)
Prof. Abdelmadjid Bouabdallah (Universite de Technologie – Compiègne, France)
Prof. Adão Silva (Instituto de Telecomunicações (IT)/University of Aveiro, Portugal)
Prof. Ahmed Mehaoua (University of Paris Descartes, France)
Prof. Alvaro Suárez-Sarmiento (University of Las Palmas de Gran Canaria, Spain)
Prof. António Rodrigues (IT / Instituto Superior Técnico, Portugal)
Prof. Arnaldo Oliveira (Universidade de Aveiro – DETI / Instituto de Telecomunicações – Aveiro, Portugal)
Prof. Aws Yonis (Ninevah University, Iraq)
Prof. Bang Chul Jung (Chungnam National University, Korea (South))
Prof. Bernd Wolfinger (University of Hamburg, Germany)
Prof. Bong Jun Choi (Soongsil University, Korea (South))
Prof. Carl Debono (University of Malta, Malta)
Prof. Carla Raffaelli (University of Bologna, Italy)
Prof. Carlos Becker Westphall (Federal University of Santa Catarina, Brazil)
Prof. Chao Fang (Beijing University of Technology, China)
Prof. Chao Shen (Xi'an Jiaotong University, China)
Prof. Chao-Tsun Chang (Hsiuping University of Science & Technology, Taiwan)
Prof. Chia-Ho Ou (National Pingtung University, Taiwan)
Prof. Demosthenes Vouyioukas (University of the Aegean, Greece)
Prof. Dennis Pfisterer (University of Luebeck, Germany)
Prof. Ding Wang (Nankai University, China)
Prof. Domenico Ciuonzo (University of Naples Federico II, IT, Italy)
Prof. Dushantha Nalin K. Jayakody (Tomsk Polytechnic University, Russia)
Prof. Eduard Babulak (Liberty University, USA)
Prof. Eirini Eleni Tsiropoulou (University of New Mexico, USA)
Prof. Eisuke Kudoh (Tohoku Institute of Technology, Japan)
Prof. Eric Renault (LIGM, Université Gustave Eiffel, CNRS, ESIEE Paris, France)
Prof. Fang Yang (Tsinghua University, China)
Prof. Fernando Velez (University of Beira Interior, Portugal)
Prof. Francesco Palmieri (Università di Salerno, Italy)
Prof. Fuhui Zhou (Nanjing University of Aeronautics and Astronautics, China)
Prof. Gamantyo Hendrantoro (Institut Teknologi Sepuluh Nopember, Indonesia)
Prof. Guy Pujolle (Sorbonne University, France)
Prof. Gyu Myoung Lee (Liverpool John Moores University, United Kingdom (Great Britain))
Prof. Hacene Fouchal (Université de Reims Champagne-Ardenne, France)
Prof. Hans-Juergen Zepernick (Blekinge Institute of Technology, Sweden)
Prof. Harald Øverby (Norwegian University of Science and Technology, Norway)
Prof. Harry Skianis (University of the Aegean, Greece)
Prof. Homayoun Nikookar (Netherlands Defence Academy, The Netherlands)
Prof. Ickho Song (Korea Advanced Institute of Science and Technology, Korea (South))
Prof. Ikmo Park (Ajou University, Korea (South))
Prof. Ioannis Moscholios (University of Peloponnese, Greece)
Prof. Jae-Hyun Park (Chung-Ang University, Korea (South))
Prof. Jenhui Chen (Chang Gung University, Taiwan)
Prof. Jiann-Liang Chen (National Taiwan University of Science and Technology, Taiwan)
Prof. Ji-Hoon Yun (Seoul National University of Science and Technology, Korea (South))

Prof. João Rebola (Instituto de Telecomunicações Lisbon, Portugal)
Prof. Joel Rodrigues (Federal University of Piauí (UFPI), Brazil)
Prof. Johann Marquez-Barja (University of Antwerpen & imec, Belgium)
Prof. Joongheon Kim (Korea University, Korea (South))
Prof. Jorge Sá Silva (University of Coimbra, Portugal)
Prof. Junping Geng (Shanghai Jiaotong University, China)
Prof. Kasturi Vasudevan (Indian Institute of Technology Kanpur, India)
Prof. Kazuo Mori (Mie University, Japan)
Prof. Klaus David (University of Kassel, Germany)
Prof. Knud Skouby (Aalborg University, Denmark)
Prof. Koichi Maru (Kagawa University, Japan)
Prof. Konstantin Mikhaylov (University of Oulu, Finland)
Prof. Kuo-Chang Ting (Minghsin University of Science and Technology, Hsinchu, Taiwan)
Prof. Lahcène Mitiche (University of Djelfa, Algeria)
Prof. Li Xu (Chinese Academy of Sciences, China)
Prof. Li Xu (Fujian Normal University, China)
Prof. Liudong Xing (University of Massachusetts, Dartmouth, USA)
Prof. Ljiljana Trajković (Simon Fraser University, Canada)
Prof. Lorenzo Vangelista (University of Padova, Italy)
Prof. Lu Lu (University of Chinese Academy of Sciences, Hong Kong)
Prof. Lyes Khoukhi (ENSICAEN, Normandie University, GREYC CNRS Lab., France)
Prof. Mamoun Alazab (Charles Darwin University, Australia)
Prof. Manoj Bs (Indian Institute of Space Science and Technology, India)
Prof. Marcelo Alencar (Federal University of Campina Grande, Brazil)
Prof. Marco Listanti (University of Rome “La Sapienza”, Italy)
Prof. Mario Tanda (Università di Napoli Federico II, Italy)
Prof. Mariusz Glabowski (Poznan University of Technology, Poland)
Prof. Michele Ruta (Politecnico di Bari, Italy)
Prof. Miguel Franklin de Castro (Federal University of Ceará, Brazil)
Prof. Miodrag Potkonjak (UCLA, USA)
Prof. Mitchai Chongcheawchamnan (Prince of Songkla University, Thailand)
Prof. Mohamad Yusoff Alias (Multimedia University, Malaysia)
Prof. Mohamed Mosbah (CNRS-LaBRI UMR 5800, University Bordeaux, Bordeaux-INP, France)
Prof. Mohammad Matin (North South University, Bangladesh)
Prof. Nabanita Das (Indian Statistical Institute, India)
Prof. Nhu-Ngoc Dao (Sejong University, Korea (South))
Prof. Nuno Pombo (University of Beira Interior, Portugal)
Prof. Pascal Lorenz (University of Haute Alsace, France)
Prof. Paulo de Lira Gondim (Universidade de Brasilia, Brazil)
Prof. Paulo Monteiro (Universidade de Aveiro, Portugal)
Prof. Paulo Pinto (Universidade Nova de Lisboa, Portugal)
Prof. Petra Perner (IBaI Leipzig, Germany)
Prof. Pravati Swain (National Institute of Technology, Goa, India)
Prof. Rafael Caldeirinha (Polytechnic Institute of Leiria, Portugal)
Prof. Richard Lin (National Sun Yat-sen University, Taiwan)
Prof. Ridha Hamila (Qatar University, Qatar)
Prof. Robert Schober (University of British Columbia, Canada)
Prof. Roberto Garelo (Politecnico di Torino, Italy)

Prof. Rogerio Dionisio (Instituto Politecnico de Castelo Branco, Portugal)
Prof. Rosaura Palma-Orozco (Instituto Politécnico Nacional, Mexico)
Prof. Sabrina Sicari (University of Insubria, Italy)
Prof. Salahuddin Mohammad Masum (Southwest Tennessee Community College, USA)
Prof. Satoshi Takahashi (Hiroshima City University, Japan)
Prof. Seiji Fukushima (Kagoshima University, Japan)
Prof. Shashikant Patil (SVKMs NMiMS Mumbai India, India)
Prof. Simon Pietro Romano (University of Napoli Federico II, Italy)
Prof. Takuya Asaka (Tokyo Metropolitan University, Japan)
Prof. Telmo Fernandes (IPLeiria / Institute of Telecommunications, Portugal)
Prof. Theo Swart (University of Johannesburg, South Africa)
Prof. Vicente Casares-Giner (Universitat Politècnica de València, Spain)
Prof. William Lehr (Massachusetts Institute of Technology, USA)
Prof. Xiaochuan Sun (NCST, China)
Prof. Yi Shang (University of Missouri, USA)
Prof. Yi-Han Chiang (Osaka Prefecture University, Japan)
Prof. Yiu-Wing Leung (Hong Kong Baptist University, Hong Kong)
Prof. Yoon-Ho Choi (Pusan National University, Korea (South))
Prof. You-Chiun Wang (National Sun Yat-Sen University, Taiwan)
Prof. Yousaf Bin Zikria (Yeungnam University, Korea (South))
Prof. Zalan Heszberger (Budapest University of Technology and Ec., Hungary)
Dr. Aashish Mathur (Indian Institute of Technology Jodhpur, India)
Dr. Abderrahmen Mtibaa (University of Missouri St. Louis, USA)
Dr. Adriaan van Wijngaarden (Bell Laboratories, Nokia, USA)
Dr. Adrian Kliks (Poznan University of Technology, Poland)
Dr. Ajay Singh (Indian Institute of Technology Jammu, India)
Dr. Ala Khalifeh (German University of Jordan, Jordan)
Dr. Alban Duverdier (Centre National D'Etudes Spatiales (CNES), France)
Dr. Alberto Gotta (ISTI-CNR, Italy)
Dr. Alessandro Carrega (CNIT, Italy)
Dr. Alexandru Vulpe (University Politehnica of Bucharest, Romania)
Dr. Amitava Mukherjee (Globsyn Business School, Kolkata, India)
Dr. Angelos Liveris (Wavelab Inc, USA)
Dr. Anna Antonyová (University of Prešov in Prešov, Slovakia)
Dr. Anwer Al-Dulaimi (EXFO Inc., Canada)
Dr. Argyrios Kyrgiazos (University of Surrey, United Kingdom (Great Britain))
Dr. Arianna D'Ulizia (CNR, Italy)
Dr. Atef Abdrabou (UAE University, United Arab Emirates)
Dr. Aweek Das (Palo Alto Networks, USA)
Dr. Barry Evans (University of Surrey, United Kingdom (Great Britain))
Dr. Bongkyo Moon (Quantum Informatics Research (QIR), Korea (South))
Dr. Bramah Hazela (Amity University Uttar Pradesh India, India)
Dr. Carlo Augusto Grazia (University of Modena and Reggio Emilia, Italy)
Dr. Cedric Adjih (INRIA, France)
Dr. Chaker Abdelaziz Kerrache (University of Laghouat, Algeria)
Dr. Chau Yuen (Singapore University of Technology and Design, Singapore)
Dr. Chayan Bhar (National Institute of Technology Warangal, India)
Dr. Chi-Fu Huang (National Chung Cheng University, Taiwan)

Dr. Chih-Lin Hu (National Central University, Taiwan)
Dr. Chinmoy Kundu (University College Dublin, Ireland)
Dr. Chongwen Huang (Zhejiang University, China)
Dr. Chunqiang Hu (Chongqing University, China)
Dr. Cicek Cavdar (KTH Royal Institute of Technology, Sweden)
Dr. Dariusz Wiecek (National Institute of Telecommunications, Poland)
Dr. De Mi (University of Surrey, United Kingdom (Great Britain))
Dr. Debashis De (West Bengal University of Technology, India)
Dr. Deepak Mishra (IIST, India)
Dr. Deyun Gao (Beijing Jiaotong University, China)
Dr. Dimitri Papadimitriou (University of Antwerp – imec, Belgium)
Dr. Dimitris Chatzopoulos (Hong Kong University of Science and Technology, Hong Kong)
Dr. Donghyun Kim (Georgia State University, USA)
Dr. Ekasit Nugoolcharoenlap (Rajamangala University of Technology Rattanakosin, Thailand)
Dr. Elyas Rakhshani (Delft University of Technology, TU Delft, The Netherlands)
Dr. Felice Manlio Bacco (National Research Council (CNR), Italy)
Dr. Felipe Cruz-Pérez (Cinvestav-IPN, Mexico)
Dr. Fernando Guiomar (Instituto de Telecomunicações, Portugal)
Dr. Floriano De Rango (University of Calabria, Italy)
Dr. Francesco Gringoli (CNIT/University of Brescia, Italy)
Dr. Gang Wang (PCTEL, Inc., USA)
Dr. Ghadah Aldabbagh (King Abdulaziz University, USA)
Dr. Giuseppe Ruggeri (University of Reggio Calabria, Italy)
Dr. Go Hasegawa (Tohoku University, Japan)
Dr. Guixin Ye (Northwest University, China)
Dr. Gustavo Marfia (Università di Bologna, Italy)
Dr. Haibo Dai (Nanjing University of Posts and Telecommunications, China)
Dr. Hang Li (University of Technology Sydney, Australia)
Dr. Hemant Purohit (Jodhpur Institute of Engineering & Technology, India)
Dr. Hing Keung Lau (Hong Kong Institute of Vocational Education (Tuen Mun), Hong Kong)
Dr. Hiromasa Habuchi (Ibaraki University, Japan)
Dr. Honghai Zhang (Google, USA)
Dr. Hyung Jae Chang (Troy University – Montgomery, USA)
Dr. Ibrahim Develi (Erciyes University, Turkey)
Dr. Ilija Basicovic (University of Novi Sad, Serbia)
Dr. Ioakeim Samaras (Intracom Telecom, Greece)
Dr. Jad Nasreddine (Rafik Hariri University, Lebanon)
Dr. Javier Gozalvez (Universidad Miguel Hernandez de Elche, Spain)
Dr. Jean-Marc Kelif (Orange Labs, France)
Dr. Jia Hu (University of Exeter, United Kingdom (Great Britain))
Dr. Jin Cao (Xidian University, China)
Dr. Jing Chen (Wuhan University, China)
Dr. Jingjing Cui (University of Southampton, United Kingdom (Great Britain))
Dr. John Vardakas (IQUADRAT Informatica S. L. Barcelona, Spain)
Dr. Joong-Lyul Lee (University of North Carolina at Pembroke, USA)
Dr. Jose Santa (Technical University of Cartagena, Spain)
Dr. José Luis Hernandez Ramos (European Commission – Joint Research Centre (JRC), Belgium)
Dr. Jukka Lempiainen (Tampere University of Technology, Finland)

Dr. Kandasamy Selvaradjou (Pondicherry Engineering College, India)
Dr. Keping Yu (Waseda University, Japan)
Dr. Kevin (Qixiang) Pang (Lakehead University, Canada)
Dr. Khoirul Anwar (Telkom University, Indonesia)
Dr. Kiho Lim (William Paterson University of New Jersey, USA)
Dr. Kostas Peppas (University of Peloponnese, Greece)
Dr. Kuntal Deka (IIT Goa, India)
Dr. Lei Cao (The University of Mississippi, USA)
Dr. Lei Mo (INRIA, France)
Dr. Lexi Xu (China Unicom Network Technology Research Institute, China)
Dr. Lifeng Lai (University of California, Davis, USA)
Dr. Linawati Linawati (Universitas Udayana, Indonesia)
Dr. Luca Caviglione (National Research Council (CNR), Italy)
Dr. Luca Reggiani (Politecnico di Milano, Italy)
Dr. M Sabarimalai Manikandan (Indian Institute of Technology Bhubaneswar, India)
Dr. M Arif Khan (Charles Sturt University, Australia)
Dr. Maggie Mashaly (German University in Cairo, Egypt)
Dr. Majed Haddad (University of Avignon, France)
Dr. Marcin Piotr Pawlowski (Expeditus, Poland)
Dr. Marco Baldi (Università Politecnica delle Marche, Italy)
Dr. Mardeni Roslee (MMU, Malaysia)
Dr. Marie-Jose Montpetit (Concordia University, Canada)
Dr. Mariusz Zal (Poznan University of Technology, Poland)
Dr. Mauro Fonseca (UTFPR, Brazil)
Dr. Máximo Morales-Céspedes (Universidad Carlos III de Madrid, Spain)
Dr. Michele Albano (Aalborg University, Denmark)
Dr. Mingzhe Chen (Princeton University, USA)
Dr. Minoru Okada (Nara Institute of Science and Technology, Japan)
Dr. Mohamed Moustafa (Egyptian Russian University, Egypt)
Dr. Montree Kumngern (King Mongkut's Institute of Technology Ladkrabang, Thailand)
Dr. Muhammad Reza Kahar Aziz (Institut Teknologi Sumatera, Indonesia)
Dr. Mukesh Singhal (University of California at Merced, USA)
Dr. Mustafa Akbaş (Embry-Riddle Aeronautical University, USA)
Dr. N Nasimuddin (Institute for Infocomm Research, Singapore)
Dr. Nanda Kishore Chavali (Mathworks India Pvt Ltd., India)
Dr. Natarajan Meghanathan (Jackson State University, USA)
Dr. Nicola Calabretta (COBRA Research Institute, The Netherlands)
Dr. Nur Abdul Razak (Universiti Teknologi MARA, Malaysia)
Dr. Oluwakayode Onireti (University of Glasgow, United Kingdom (Great Britain))
Dr. Omar Al saif (Northern Technical University, Iraq)
Dr. Paolo Crippa (Università Politecnica delle Marche, Italy)
Dr. Pasquale Dottorato (Lab ID, Italy)
Dr. Paul Mitchell (University of York, United Kingdom (Great Britain))
Dr. Paula Fraga-Lamas (University of A Coruña, Spain)
Dr. Pavel Loskot (ZJU-UIUC Institute, China)
Dr. Peiyong Zhang (China University of Petroleum (East China), China)
Dr. Peng-Yong Kong (Khalifa University, United Arab Emirates)
Dr. Petros Bithas (National and Kapodistrian University of Athens, Greece)

Dr. Philippe Owezarski (LAAS-CNRS, France)
Dr. Pietro Cassarà (National Research Council (CNR) at Pisa, Italy)
Dr. Ping Zhou (Apple, USA)
Dr. Prima Kristalina (Politeknik Elektronika Negeri Surabaya (PENS), Indonesia)
Dr. Punnarumol Temdee (Mae Fah Luang University, Thailand)
Dr. Pushpendu Kar (University of Nottingham Ningbo China, China)
Dr. Qasim Ahmed (University of Huddersfield, United Kingdom (Great Britain))
Dr. Qin Hu (IUPUI, USA)
Dr. R Prasad (Delft University of Technology, The Netherlands)
Dr. Rafael Asorey-Cacheda (Technical University of Cartagena, Spain)
Dr. Rakesh T (Monash University, Australia)
Dr. Rallis Papademetriou (University of Portsmouth, United Kingdom (Great Britain))
Dr. Ram Bilas Pachori (Indian Institute of Technology Indore, India)
Dr. Ramiz Sabbagh (University of Kent, United Kingdom (Great Britain))
Dr. Rashmi Chaudhry (International Institute of Information Technology, Italy)
Dr. Ratul Baruah (Tezpur University, India)
Dr. Ravi Hegde (IIT Gandhinagar, India)
Dr. Ravikant Saini (Indian Institute of Technology Jammu, India)
Dr. Riadh Dhaou (IRIT/ENSEEIH, University of Toulouse, France)
Dr. Riccardo Colella (University of Salento, Italy)
Dr. Roberto Di Pietro (Hamad Bin Khalifa University, Qatar)
Dr. Rodrigo Campos Bortoletto (Instituto Federal de São Paulo, Brazil)
Dr. Rosdiadee Nordin (Universiti Kebangsaan Malaysia, Malaysia)
Dr. Samir Medjiah (LAAS-CNRS, France)
Dr. Sanjay Dhar Roy (National Institute of Technology Durgapur, India)
Dr. Sanjay Singh (Manipal Institute of Technology, India)
Dr. Sanjeev Gurugopinath (PES University, India)
Dr. Sanya Anees (Indian Institute of Information Technology – Guwahati, India)
Dr. Scabin Kumar (Amity University Lucknow Campus (UP) India, India)
Dr. Seemanti Saha (National Institute of Technology Patna, India)
Dr. Sherali Zeadally (University of Kentucky, USA)
Dr. Shuai Zhao (Tencent America LLC, USA)
Dr. Sirikan Chucherd (Mae Fah Luang University, Thailand)
Dr. Sonali Chouhan (Indian Institute of Technology Guwahati, India)
Dr. Song Xing (California State University, Los Angeles, USA)
Dr. Stylianos Basagiannis (United Technologies Research Centre, Ireland)
Dr. Sudhir Kumar (Indian Institute of Technology Patna, India)
Dr. Sumiko Miyata (Shibaura Institute of Technology, Japan)
Dr. Sunantha Sodsee (King Mongkut's University of Technology North Bangkok, Thailand)
Dr. Surapong Uttama (Mae Fah Luang University, Thailand)
Dr. Taeshik Shon (Ajou University, Korea (South))
Dr. Tariq Umer (COMSATS University Islamabad Lahore Campus, Pakistan)
Dr. Theofilos Chrysikos (University of Patras, Greece)
Dr. Thomas Lagkas (International Hellenic University, Kavala Campus, Greece)
Dr. Thumrongrat Amornraksa (King Mongkut's University of Technology Thonburi, Thailand)
Dr. Tianhua Xu (Tianjin University, China)
Dr. Tomoki Yoshihisa (Osaka University, Japan)
Dr. Trong-Minh Hoang (Posts and Telecommunications Institute of Technology, Vietnam)

Dr. Vandana Rohokale (SPPU Pune, Maharashtra, India)
Dr. Vanlin Sathya (University of Chicago, USA)
Dr. Vasilis Friderikos (King's College London, United Kingdom (Great Britain))
Dr. Vladimir Dyo (University of Bedfordshire, United Kingdom (Great Britain))
Dr. Wael Jaafar (Carleton University, Canada)
Dr. Watcharapan Suwansantisuk (King Mongkut's University of Technology Thonburi, Thailand)
Dr. Wei Feng (Tsinghua University, China)
Dr. Weili (lily) Wu (University of Texas at Dallas, USA)
Dr. Weiwen Zhang (Guangdong University of Technology, China)
Dr. Wenjun Xu (Beijing University of Posts and Telecommunications, China)
Dr. Worasak Rueangsirarak (School of Information Technology, Mae Fah Luang University, Thailand)
Dr. Xianbin Yu (Zhejiang University, China)
Dr. Xiang Gui (Massey University, New Zealand)
Dr. Xianliang Jiang (Ningbo University, China)
Dr. Xiao Zhang (South-Central University for Nationalities, China)
Dr. Xiaohua (Edward) Li (State University of New York at Binghamton, USA)
Dr. Xiaoyu Tang (Zhejiang University, China)
Dr. Yafei Hou (Okayama University, Japan)
Dr. Yang Wang (La Salle University, USA)
Dr. Yangyang Li (China Academy of Electronics and Information Technology, China)
Dr. Yasin Kabalci (Nigde Omer Halisdemir University, Turkey)
Dr. Yatish Joshi (Cisco Systems, USA)
Dr. Yee-Jin Cheon (Korea Aerospace Research Institute, Korea (South))
Dr. Ying Mao (Fordham University, USA)
Dr. Yong Guan (Iowa State University, USA)
Dr. Yongxu Zhu (South Bank University, United Kingdom (Great Britain))
Dr. Yu Zhang (Zhejiang University of Technology, China)
Dr. Yuansong Qiao (Athlone Institute of Technology, Ireland)
Dr. Yun-Wei Lin (National Chiao Tung University, Taiwan)
Dr. Yusuf Nur Wijayanto (Indonesian Institute of Sciences (LIPI), Indonesia)
Dr. Yvon Gourhant (Orange Labs, France)
Dr. Zeeshan Kaleem (COMSATS University Islamabad, Wah Campus, Pakistan)
Dr. Zengpeng Li (Lancaster University, United Kingdom (Great Britain))
Dr. Zheng Chu (University of Surrey, United Kingdom (Great Britain))
Dr. Zhi Lin (Army Engineering University of PLA, China)
Dr. Zhiyuan Zheng (Pinterest, USA)
Dr. Zongyang Zhang (Beihang University, China)

Table of Contents

Title Page

Welcome Message from General Chair

Committee

Program Schedule

Table of Contents

Keynote Speech

Keynote 1

End-to-End Learning Framework for Future Wireless and Satellite Networks using AutoEncoder

Prof. Mathini Sellathurai

Keynote 2

D2D-MEC Systems for Video Streaming

Prof. Ridha Hamila

Keynote 3

Enabling Future Superconnectivity: Internet of Things as a Melting Pot of Communication and Intelligence

Assoc. Prof. Dr. Agustian Taufiq Asyhari

Keynote 4

Microwave Remote Sensing and the Applications for Environmental Monitoring

Prof. Josaphat Tetuko Sri Sumantyo

1570718105	Traffic-aware Link Assignment in GEO Satellite Communication Networks	1
	Letian Li (No. 38 Research Institute, China Electronics Technology Group Corporation, China); Wenlong Wei (Shanghai Institute of Satellite Engineering, China); Kaiwei Wang (No 38 Research Institute, China Electronics Technology Group Corporation, China); Weilong Ren (No. 38 Research Institute China Electronics Technology Group Corporation, China); Shuo Wang (No. 38 Research Institute China Electronics Technology Group Corporation, China)	
1570721008	Orbit Shifting Analysis Satellite Telkom 4 with Cowell and Encke Method Caused by Perturbation	6
	Ahmad Fahrizal Ramadhan, Solichah Larasati and Imam Muhammadi PB (Institut Teknologi Telkom Purwokerto, Indonesia)	
1570723450	A Novel Elman Network based INS/GPS Fusion Filter to Enhance Tracking Accuracy in UAVs	16
	Arya Viswanath, and Sameer Saheerudeen Mohammed (National Institute of Technology Calicut, India)	

1570723971	Techno-Economic of the Ka-Band HTS to Minimize Broadband Services Gap for Indonesian Government Ignatius Daru Kristiadi, Muhammad Imam Nashiruddin ,and Miftadi Sudjai (Telkom University, Indonesia)	21
1570725914	Implementation of Layer 2 MPLS VPN on the SDN Hybrid Network using Ansible and ONOS Controllers Kukuh Nugroho (Institut Teknologi Telkom Purwokerto, Indonesia)	27
1570718886	Mapping of Business Intelligence Research Themes: Four Decade Review Agung Purnomo (Bina Nusantara University, Indonesia); Mega Firdaus (Universitas Nahdlatul Ulama Sidoarjo, Indonesia); Dian Sutiksno (Politeknik Negeri Ambon, Indonesia); Riyan Putra (Nahdlatul Ulama University of Surabaya, Indonesia); Uswatun Hasanah (Universitas Trunojoyo Madura, Indonesia)	32
1570720122	Expert System of Land Suitability for Fruit Cultivation Using Case-Based Reasoning Method Bayu Anggoro Krisnamurti, Yogo Dwi Prasetyo, Condro Kartiko (Institut Teknologi Telkom Purwokerto, Indonesia)	38
1570722407	Performance Comparison of Swarm Intelligence Algorithms for Web Caching Strategy Mulki Indana Zulfa (Universitas Gadjah Mada & Universitas Jenderal Soedirman, Indonesia); Rudy Hartanto, and Adhistya Permanasari (Universitas Gadjah Mada, Indonesia)	45
1570722560	Implementation of Constant-Q Transform (CQT) and Mel Spectrogram to converting Bird's Sound Silvester Dian Handy Permana (Universitas Trilogi, Indonesia); Ketut Bayu Yogha (Universitas Trilogi, Indonesia)	52
1570723265	Fuzzy Logic Implementation on Motion of Tennis Ball Picker Robot Faizah, Aris Triwiyatno, and R. Isnanto (Diponegoro University, Indonesia)	57
1570723704	Personality Detection on Social Media Twitter Using Long Short-Term Memory with Word2Vec Rachma Indira and Warih Maharani (Telkom University, Indonesia)	64
1570722145	5G D2D Transmission Mode Selection Performance & Cluster Limits Evaluation of DAI and ML Techniques Iacovos Ioannou (University of Cyprus, Cyprus & CYENS Center of Excellence, Cyprus); Christophoros Christophorou (CYENS Centre of Excellence & CITARD Services LTD, Cyprus); Vasos Vassiliou (University of Cyprus & CYENS Center of Excellence, Cyprus); Andreas Pitsillides (University of Cyprus, Cyprus)	70
1570723135	Collaborative Traffic Measurement Using Sketches for Software Defined Networks	81

	Cheng-Chieh Peng, Pi-Chung Wang and Kuo-Shiang Hsu (National Chung Hsing University, Taiwan)	
1570723159	Adaptive Replication for Real-Time Applications based on Mobile Edge Computing Kuo-Shiang Hsu, Wan-Chi Chang, Wei-Hsun Huang and Pi-Chung Wang (National Chung Hsing University, Taiwan)	88
1570723965	Utilizing 2100 MHz for 4G LTE-A Network Deployment to Addressing Spectrum Scarcity in Urban Area Pinasthika Aulia Fadhila, Muhammad Imam Nashiruddin, and Muhammad Adam Nugraha (Telkom University, Indonesia)	95
1570724372	Intelligent Augmented Video Streaming Services Using Lightweight QR Code Scanner Xuan-Vinh Nguyen, Gia-Huy Lam, Quang-Nhat Le, Quoc-Loc Duong, The-Manh Nguyen and Bao-Long Le (University of Information Technology, and Vietnam National University, Ho Chi Minh City, Vietnam); Quang Dieu Tran (Ho Chi Minh National Academy of Politics Hanoi, Vietnam); Trong-Hop Do (University of Information Technology, and Vietnam National University, Ho Chi Minh City, Vietnam); Nhu-Ngoc Dao (Sejong University, South Korea)	103
1570726122	Multi-Device Task Offloading with Scheduling in an Edge Cloud Platform Moch Yasin, Tohari Ahmad, and Royyana Mulisn Ijtihadie (Institut Teknologi Sepuluh Nopember, Indonesia)	108
1570718706	Design of LoRaWAN for Smart Factories in Industrial Estates Hanin Nafi'ah and Puspa Rahmawati (Institut Teknologi Telkom Purwokerto, Indonesia); Alfin Hikmaturokhman (Institut Teknologi Telkom Purwokerto & Universitas Indonesia, Indonesia); Solichah Larasati (Institut Teknologi Telkom Purwokerto, Indonesia)	116
1570722106	Concatenated Coset Coding in a Multi-tone DHA FH OFDMA System with Order Statistics-based Reception Dmitry Osipov (Kharkevich Institute for Information Transmission Problems of the RAS Moscow, Russia & National Research University Higher School of Economics Moscow, Russia)	123
1570726191	Evaluation of Low-density parity-check code with 16-QAM OFDM in a time-varying channel Ali Y. Kuti and A. E. Abdelkareem (College of Information Engineering (COIE) Al-Nahrain University, Iraq)	128
1570726611	Analysis of GFDM-OQAM Performance Using Zero Forcing Equalization Elsa Nur Oktaviar, Anggun Fitriani Isnawati, and Khoirun Ni'amah (Institut Teknologi Telkom Purwokerto, Indonesia)	135

1570726618	Performance Analysis GFDM Using MMSE Equalization in Audio Transmission Wiwit Indah Sari and Anggun Fitriani Isnawati (Institut Teknologi Telkom Purwokerto, Indonesia); Khoirun Ni'amah (Institut Teknologi Telkom Purwokerto & Telkom University, Indonesia)	141
1570731252	Minimizing the additional costs due to Router Outage in IP-over-EON using Adaptive Routing Ridwansyah (Universitas Negeri Makassar & Universitas Hasanuddin, Indonesia); Syafruddin Syarif, Dewiani, and Wardi (Universitas Hasanuddin, Indonesia)	146
1570723827	Sorting Algorithm for Medium and Large Data Sets Based on Multi-Level Independent Subarrays Kiaksar Shirvani Moghaddam (Iran University of Science and Technology, Iran); Shahriar Shirvani Moghaddam (Shahid Rajaee Teacher Training University, Iran)	152
1570723829	Classification Hoax News of Covid-19 on Instagram Using K-Nearest Neighbor Indra Malik Akbar F, Yaddarabullah, and Silvester Dian Handy Permana (Universitas Trilogi, Indonesia)	157
1570723909	Steganalysis of Adaptive Image Steganography using Convolution Neural Network and Blocks Selection Saeed Mohammed Hashim (College of IT University of Babylon, Iraq); Dhia Abdullahusein Zubaydi (College of Science University of Almustansiriyah, Iraq)	162
1570723979	Classification Auction Motorcycle and Car In South Jakarta District Attorney Using Naïve Bayes Fransisca Kristina Mega, Yaddarabullah, and Silvester Dian Handy Permana (Universitas Trilogi, Indonesia)	168
1570724464	A Network of Object-Oriented Software Metrics' Parameters Marwah M. A. Dabdawb, and Basim Mahmood (University of Mosul, Iraq)	172
1570724891	Indicators on the Feasibility of Curfew on Pandemics Outbreaks in Metropolitan/Micropolitan Cities Basim Mahmood (University of Mosul, Iraq)	179
1570725374	Artificial Potential Field Algorithm for Obstacle Avoidance in UAV Quadrotor for Dynamic Environment Alfian Ma'arif (Universitas Ahmad Dahlan, Indonesia); Wahyu Rahmaniari (National Central University, Taiwan); Marco Antonio Márquez Vera (Universidad Politécnica de Pachuca, Carr. Pachuca-Sahagún Km. 20, México, Mexico); Rania Majdoubi (Mohammed V University in Rabat & LCS Laboratory, Faculty of Sciences, Mohammed V University in Rabat, Morocco); Abdullah Çakan (Konya Technical University, Turkey)	184

1570726675	Prediction of the Unemployment and Bank Interest Rates on Changes in the Stock Price Index with Efficient Regression Berlian Al Kindhi, Rista Anisa Dewi, Noviyanti Santoso, Akhmad Yuzfa Salvian Idris, Afrizandy Bayu Yudhistira, Felya Mayora Putri (Institut Teknologi Sepuluh Nopember, Indonesia)	190
1570725848	Data Efficient Video Transformer for Violence Detection Almaamoon Abdali (Ministry of Education, Iraq)	195
1570726714	Network Science as a Forgery Detection Tool in Digital Forensics Alaa Amjed, and Basim Mahmood (University of Mosul, Iraq); Khalid A. K. AlMukhtar (Ministry of Interior, Iraq)	200
1570727040	Data Quality Management Maturity: Case Study National Narcotics Board Henny Sri Indriany, Achmad Nizar Hidayanto, Lellyana Juliet Wantania (Universitas Indoesia, Indonesia); Budy Santoso, Widha Utami Putri, and Welly Pinuri (National Narcotics Board, Indonesia)	206
1570726784	Solar Cell Based Integrated Sensor System Monitoring on Smart IoT Berlian Al Kindhi, Josaphat Pramudijanto, Ilham Surya Pratama, Lucky Putri Rahayu, Fauzi I. Adhim, and Joko Susila (Institut Teknologi Sepuluh Nopember, Indonesia)	213
1570726820	Real-Time Examination System For New Students At Pandemic Time Covid 19 Using Fuzzy Logic Lukman Medriavin Silalahi, Setiyo Budiyo, Imelda Uli Vistalina Simanjuntak, and Freddy Artadima Silaban (Universitas Mercu Buana, Indonesia); Agus Dendi Rochendi (Lembaga Ilmu Pengetahuan Indonesia, Indonesia); Wafi Akhlaqil Karimah (Universitas Mercu Buana, Indonesia)	219
1570727034	Visual Editor for Streamlining P4-based Programmable Parser Development Muhammad Fajar Sidiq, and Mega Pranata (Institut Teknologi Telkom Purwokerto, Indonesia); Akbari Indra Basuki (Indonesian Institute of Sciences, Indonesia)	225
1570727053	SimRouter: Message routing based on Similarity and Relative Probable Positions of nodes in DTNs Gaurav Kumar, and Yatindra Nath Singh (Indian Institute of Technology Kanpur, India)	231
1570728769	A Fast Sub-Optimum Access Point Selection in Ultra-Dense Networks Kiaksar Shirvani Moghaddam (Iran University of Science and Technology, Iran); Shahriar Shirvani Moghaddam (Shahid Rajaee Teacher Training University (SRTTU), Iran)	239
1570731555	Integrated Strategy Framework To Improve Quality Of Network on The BMKG Communication Network System Budi Dwinanto, and Ajib Setyo Arifin (Universitas Indonesia, Indonesia)	244

1570727672	The Analysis of High Power Amplifier Distortion on the MIMO-GFDM Systems Ari Endang Jayati, and Budiani Destyningtias (Universitas Semarang, Indonesia)	252
1570728090	Experimental Characterization of Miniaturized Meander Line-Based 4×4 Butler Matrix Zulfi (Institut Teknologi Bandung and Telkom University, Indonesia); Achmad Munir (Institut Teknologi Bandung, Indonesia)	258
1570728572	Outage Probability Analysis of Full-Duplex UAV-assisted Wireless System over Rician Fading Channel Kalavagunta Dilip Kumar, and Anandpushparaj Jeganathan (National Institute of Technology, Trichy, India); Mitali Gupta (Indian Telephone Industries Limited (ITI Ltd), INDIA, India); Muthuchidambaranathan P (National Institute of Technology, Trichy, India)	263
1570728949	Design GUI Filter Infinite Impulse Response (IIR) for Noise Reduction While Real-Time using LabVIEW Rheza Andika F, Ahmad Al Afif, and Putri Wulandari (Universitas Al Azhar Jakarta, Indonesia);	269
1570731404	Spectrum Fee License Analysis on 3.5, 26, and 28 GHz Frequency For 5G Implementation in Indonesia Ade Wahyudin (Sekolah Tinggi Multimedia (MMTC) Yogyakarta, Indonesia); Alfin Hikmaturokhman, and Dinar Ahmad Harish (Institut Teknologi Telkom Purwokerto, Indonesia)	274
1570731767	Segmenting the Subscribers of An Indonesian 4G Service Operator Using RFM Method Joko Tri Wibowo, and Muhammad Suryanegara (Universitas Indonesia, Indonesia)	280
1570728738	A Comparison of Several Approaches for Image Recognition used in Food Recommendation System Quang-Linh Tran, Gia-Huy Lam, Quang-Nhat Le, Trung-Hieu Tran, and Trong-Hop Do (University of Information Technology, Ho Chi Minh City & Vietnam National University, Ho Chi Minh City, Vietnam)	284
1570730064	Interpolation Effect on FBP-Based Image Reconstruction of Measured L-Band Microwave Tomography Achmad Munir, Fauzia Sekarningrum, and Nurul Amalia Amri (Institut Teknologi Bandung, Indonesia); Bakhtiar Abubakar, and Slamet Risnanto (Universitas Sangga Buana & Indonesia, Indonesia); Mohammad Ridwan Effendi (Institut Teknologi Bandung, Indonesia)	290
1570730118	Experimental Approach of L-Band Microwave Tomography and Its Image Reconstruction Using CS Method	294

Achmad Munir, Sri Mulyani, Dian Kurnia Imanda, and Ricky Willyantho (Institut Teknologi Bandung, Indonesia); Sofia Sa'idah, and Edwar (Telkom University, Indonesia);

- | | | |
|-------------------|--|------------|
| 1570732529 | <p>Designing a tourism recommendation system using a hybrid method (Collaborative Filtering and Content-Based Filtering)</p> <p>Ni Wayan Priscila Yuni Praditya, Adhistya Erna Permanasari, and Indriana Hidayah (Universitas Gadjah Mada, Indonesia)</p> | 298 |
| 1570732934 | <p>A Study on Diacritic Restoration Problem in Vietnamese Text using Deep Learning based Models</p> <p>Quang-Linh Tran, Gia-Huy Lam, Van-Binh Duong and Trong-Hop Do (University of Information Technology, Ho Chi Minh City & Vietnam National University, Ho Chi Minh City, Vietnam)</p> | 306 |
| 1570733047 | <p>30VNFoods: A Dataset for Vietnamese Foods Recognition</p> <p>Trong-Hop Do, Duc-Duy-Anh Nguyen, Hoang-Quan Dang, Hoang-Nhan Nguyen, Phu-Phuoc Pham and Duc-Tri Nguyen (University of Information Technology, Ho Chi Minh City & Vietnam National University, Ho Chi Minh City, Vietnam)</p> | 311 |
| 1570733322 | <p>Face Recognition for Identification and Verification in Attendance System: A Systematic Review</p> <p>Ahmad Anshari, Sulistyoyo Aris Hirtranusi, Dana Indra Sensuse, Kautsarina Kautsarina (Universitas Indonesia, Indonesia); Ryan Randy Suryono (Universitas Teknokrat Indonesia, Indonesia)</p> | 316 |
| 1570733412 | <p>Image Classification for Egg Incubator using Transfer Learning of VGG16 and VGG19</p> <p>Apri Junaidi, Jerry Lasama, Faisal Dharma Adhinata (Institut Teknologi Telkom Purwokerto, Indonesia); Ade Rahmat Iskandar (Akademi Teknik Telekomunikasi Sandhy Putra, Indonesia)</p> | 324 |
| 1570731609 | <p>Cloud-RAN and Coverage Gap in Rural Areas</p> <p>Ida Sémévo TOGNISSE (Institut de Mathématiques et Sciences Physiques, Benin); Ahmed Dooguy KORA (Ecole Supérieure Multinationale de Télécommunications, Senegal); Jules DEGILA (Institut de Mathématiques et Sciences Physiques, Benin)</p> | 329 |
| 1570731911 | <p>Real-time Signboards using Panels P5 RGB and NodeMCU esp8266 with Library PxMatrix</p> <p>Prasetyo Yuliantoro, Shinta Romadhona, and Alfin Hikmaturokhman (Institut Teknologi Telkom Purwokerto, Indonesia)</p> | 337 |
| 1570733136 | <p>Prototype Smart Door Lock By Using Wireless Network Based on Arduino Uno</p> <p>Kholidiyah Masykuroh, Fikra Titan Syifa, Gatot Rizky Setiyanto, Afifah Dwi Ramadhani, Danny Kurnianto, and Nanda Iryani (Institut Teknologi Telkom Purwokerto, Indonesia)</p> | 342 |

1570733366	SOLSR Protocol Performance Analysis For Voip Application In Mesh Topology Aditya Wijayanto, Rifki Adhitama, and Auliya Burhanuddin (Institut Teknologi Telkom Purwokerto, Indonesia)	348
1570731816	Development and Characterization of Narrowband BPF Made of Substrate Integrated Waveguide Hardi Nusantara (Institut Teknologi Bandung, Indonesia); Arief Budi Santiko (Indonesia Institute of Science LIPI, Indonesia); Zulfi and Achmad Munir (Institut Teknologi Bandung, Indonesia); Kusmadi and Nina Lestari (Universitas Sangga Buana, Indonesia)	354
1570731866	Design of a Compact Circular Patch Antenna Operating at ISM-Band for the WiMAX Communication Systems Rashedul Islam, Fardeen Mahbub, Shouherdho Banerjee Akash, Imtiaz Ahmed Prince, Farhan Tasnim, Nafisa Tabassum Navia (American International University-Bangladesh, Bangladesh)	358
1570731965	Design and Characterization of ADM-based Dual-band SIW Bandpass Filter Ahmad Ikhyari, Ahmad Izzuddin and Achmad Munir (Institut Teknologi Bandung, Indonesia)	363
1570733029	A Design of Extreme Learning Machine Based Receiver for 2×2 MIMO-OFDM System M. Rezwatul Mahmood and Mohammad A Matin (North South University, Bangladesh)	367
1570733359	Secret and Trustable Communication Channel over Blockchain Public Ledger Muhammad Fajar Sidiq, Fahrudin Mukti Wibowo and Merlinda Wibowo (Institut Teknologi Telkom Purwokerto, Indonesia); Akbari Indra Basuki, Iwan Setiawan and Didi Rosiyadi (Indonesian Institute of Sciences, Indonesia)	371

Secret and Trustable Communication Channel over Blockchain Public Ledger

1stMuhammad Fajar Sidiq
Department of Informatics
IT Telkom Purwokerto
 Purwokerto, Indonesia
 fajar@ittelkom-pwt.ac.id

2ndFahrudin Mukti Wibowo
Department of Informatics
IT Telkom Purwokerto
 Purwokerto, Indonesia
 mega@ittelkom-pwt.ac.id

3rdMerlinda Wibowo
Department of Informatics
IT Telkom Purwokerto
 Purwokerto, Indonesia
 merlinda@ittelkom-pwt.ac.id

4thAkbari Indra Basuki
Research Center for Informatics
Indonesian Institute of Sciences
 Bandung, Indonesia
 akbari.indra.basuki@lipi.go.id

5thIwan Setiawan
Research Center for Informatics
Indonesian Institute of Sciences
 Bandung, Indonesia
 iwan.setiawan@lipi.go.id

6thDidi Rosiyadi
Research Center for Informatics
Indonesian Institute of Sciences
 Bandung, Indonesia
 didi.rosiyadi@lipi.go.id

Abstract—Blockchain public ledger is a trusted medium that provides incorruptible data storage and traceable transactions. However, due to its public verifiability, it is hard to compromise two functionalities at once, a covert channel and a verifiable communication medium. The existing methods are either vulnerable to statistical analysis or lack trustable delivery notifications due to off-chain message delivery. This paper fills the gap by proposing a Multi-addresses Random Set Encoding (MaRSE) to increase message covertness by retaining the natural transactions pattern and resisting statistical attacks. The method uses on-chain message delivery to preserve blockchain-based verification that provides a trustable communication medium for the communicating parties. As a result, our proposed method is robust to a brute force attack due to its unpredictable transaction sequence and high number possibility of addresses combinations. The proposed system has been implemented on Ethereum rinkeby networks with the stegano-transactions being recorded within block numbers 4932833 to 4932893.

Index Terms—Secret, Trustable, Communication, Blockchain, multi-addresses encoding, permutation.

I. INTRODUCTION

A blockchain ledger is a reliable and trusted medium, established by three main components: public-key cryptography, distributed consensus algorithm, and immutable hash chain schema. As a result, blockchain provides immutable data storage and traceable transactions that verifiable by anyone using a cryptographic signature.

The most attractive use of blockchain is to preserve user privacy. In a blockchain, transaction validation is based on cryptography schema rather than user identity. Thus, everyone can issue a secret transaction while maintaining their privacy since the transaction only record the addresses of the sender and the recipient. The real identity of the person who makes the payment is unknown, so does with the recipients.

Blockchain privacy-preservation can be exploited to implement a covert communication channel that requires not only secret identity but also secret channel and content. Blockchain-based secret communication provides traceable communication which means it is possible to prove that the communication was happening and the recipient cannot deny that the sender has sent the message. As consequence, it can eliminate the distrust among the communicating parties.

Unfortunately, due to the low capacity of blockchain transactions to store the hidden message, some existing works use off-chain delivery to offer a larger capacity. Some of them use IPFS networks [1], images [2]–[4], or text files [5] for the off-chain delivery. The message is first encrypted while the encryption key is driven by the on-chain communication. Even though it increases the message capacity, the methods nullify blockchain's universal verifiability. As a result, the recipients might simply deny the receiving for any kind of reason such as due to network censorships, or corrupted files.

Meanwhile, other works that solely uses on-chain delivery suffers from unnatural transaction pattern or low message capacity [6]–[9]. The simplest way to increase message capacity is by excessively modify the transaction fields. The work in [6] uses transaction value to store up to 28.12 bits per transaction. Nevertheless, this technique gives unnatural patterns and prone to statistical analysis that reveal the hidden communication channel. In another hand, using only the destination address to store the hidden message will yield a low throughput. As being presented in [9], the method can only store single-bit data per destination address.

In this paper, we proposed Multi-addresses Random Set Encoding (MaRSE) to implement a covert communication medium

over blockchain networks that satisfy both, the covertness of the secret channel and its trusted verifiability. The method encodes the hidden message into a series of blockchain transactions called stegano-transactions. The key point is to use multiple addresses at once, called a set address. It aims to improve message capacity and the secretness of the message by selecting a different subset for each session. Meanwhile, the use of on-chain message delivery ensures undeniable message delivery for the communicating entities.

The proposed method is robust against brute force and statistical analysis attacks due to several reasons as follows.

- 1) The address can be anything, from a blockchain account to a smart contract one. Consequently, it covers all types of addresses which is harder to analyze.
- 2) The method does not vary the transaction field value. Thus, it is hard to infer which transaction belongs to our covert channel by analyzing the irregularity. It can be a regular payment, one-time transaction, or even a smart contract transaction.
- 3) It is hard to infer the set addresses out of the existing blockchain addresses.
- 4) It has unpredictable sequences since any transactions can be inserted in between. As a consequence, there are unlimited combinations to infer the communication channel.
- 5) For each communication session, it is hard to infer the currently selected subset.

We further elaborate the MaRSE method as follow. Sections II presents the system design, while chapter III describes the robustness model. Chapter IV discusses the result and its evaluations. Finally, chapter V presents the conclusion.

II. SYSTEM DESIGN

A. System abstraction

For simplicity, we divide the system into three abstraction layers as depicted in Fig. 1, Message layer, Packet layer, and Transaction layer.

The message layer manages the message delivery into the blockchain ledger. In this layer, a new session key called a message key is generated to compute the new seed for subset selection. After sending a message, the sender computes a new message key for the next message by hashing the shared secret key with the block number (Bnumber) of the latest stegano-transactions (1).

$$message_{key} = hash(secret_{key}, Bnumber_{prev}) \quad (1)$$

$$seed_{key} = hash(Bnonce_{prev}, message_{key}) \quad (2)$$

In the packet layer, the message is breakdown into a per-character basis as a pair of source and destination addresses. The pair is chosen randomly from a subset address while the subset address is randomly selected from the main set address by

using a random seed ($seed_{key}$). It is generated by hashing the message key with the previous block-nonce ($Bnonce$) where the stegano-transaction is being recorded (2). For the first character, the block nonce refers to the latest block of the previous session. The illustration regarding the selection of address-pair is depicted by Fig. 2.

For the last step, the transaction layer sends the stegano-transaction by using the selected pair of addresses into blockchain addresses.

B. Ethereum transactions model

In this paper, we limit our discussion to Ethereum blockchain. In Ethereum blockchain, every account consists of 20-bytes of hexadecimal characters or 160-bit binary values [10].

Given all of the possible Ethereum addresses as a set A . A simplified model of Ethereum transaction (t) can be expressed as $t = (A_S, A_D, G_L, G_P, V, I_D)$. Where $A_S, A_D \in A$, A_S represent the sender address and A_D represent the destination address. G_L , G_P , and V respectively represent the Gas limit, gas price, and transaction value. Meanwhile, I_D represents the extra input data of the transaction.

In a single address schema, a single user (u) might send several transactions so that the generated transactions will form a transaction set (T_u), $T_u = \{t_1, t_2, \dots, t_i | t_i \in T_u\}$. Where i represent transaction counter of sender u . The user's address u_a acts as the sender address for every transactions in (T_u).

In multi-address schema, each user (u) has a set of addresses S_u , where $S_u = \{s_1, s_2, \dots, s_n | s_i \in A\}$. The transactions generated by the user u is the union of all of the transactions sent by each address in S_u such that $T_u = \{T_{u_{s1}} \cup T_{u_{s2}} \cup \dots \cup T_{u_{sn}}\}$.

C. Multi-addresses Random Set Encoding (MaRSE)

The MaRSE method uses address-based encoding to translate the hidden message into a pair of source and destination addresses. The set of source addresses refers to the sender's address S_u , while the set of destination addresses (D_u) is a set of destination addresses determined by the sender. The sender must share the destination address (D_u) along with the shared secret key to their intended recipient before sending any hidden message.

The address-based encoding is a mapping function of $y = f(x, seed_{key})$ that maps a full set of n -bit of binary number into a set of address S consisting of 2^n elements. For example, a set of 2-bit binary number x , $x = \{00, 01, 10, 11\}$, can be encoded into a set of address $S_A = \{s_1, s_2, s_3, s_4\}$.

For harder predictability, instead of using the entire set address to encode the hidden message, the MaRSE method only picks some of the addresses or the proper subset (S_S and D_S) to encode the message on a per-character basis. Where S_S is the proper subset of source addresses ($S_S \subset S_u$) and D_S is the proper subset of the destination addresses ($D_S \subset D_u$). For each delivered transaction, the method always recomputes the

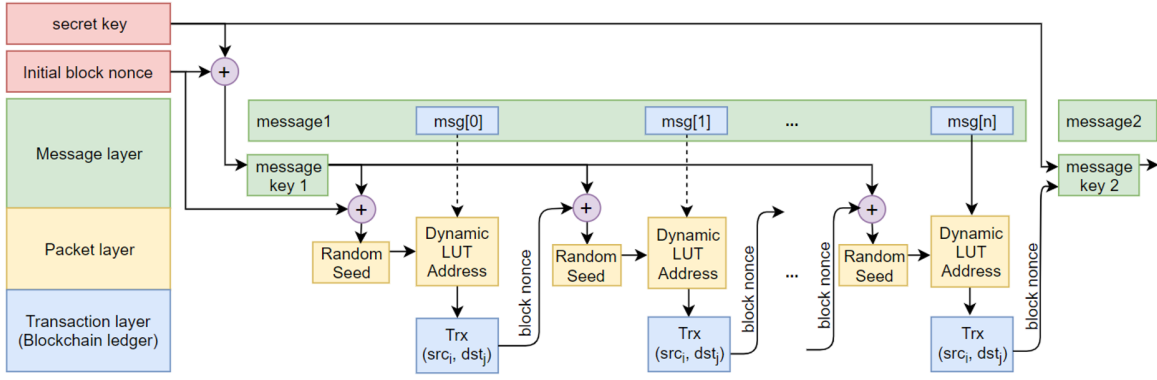


Fig. 1. MaRSE Abstraction layer

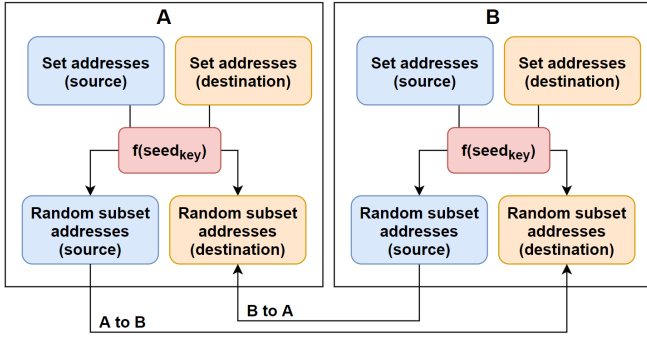


Fig. 2. Scanning for hidden message

encoding lookup table (LUT) to provide high randomness and increase the difficulty against brute-force attacks.

D. Valid Stegano-transactions

A valid stegano-transaction (Vt) is a transaction sent by a source addresses s_i to a destination address d_j , where $s_i \in S_S$, $d_j \in D_S$. Each time the sender sends a stegano-transaction, the random set encoding changes the encoding function (y) by using a new random seed such that $y = f(x, seed_{key})$, to generate a new pair of proper subset S_S and D_S .

Random transactions can be inserted in between two valid stegano-transactions by carefully selecting source addresses and destination addresses (s_i, d_j). If the sender address is chosen from the selected set ($s_i \in S_S$) then the destination address cannot be one of the destination set ($d_j \notin D$). If the sender address is not within the selected set ($s_i \notin S_S, s_i \in S_u$) then the destination address must be the member of destination set (D_S). Herein, the receiving parties can filter out the filling transactions from the valid stegano-transactions.

For the delivery, we use the filling ratio (f_r) to ensure a non-consecutive delivery. For example, if we choose $f_r = \{0.5\}$, then a valid stegano transaction will be sent after sending a filler

transaction. For a message consist of 64 characters, the hidden message will be delivered within ≈ 128 transactions.

III. SYSTEM ROBUSTNESS

The robustness of the proposed method refers to its resistance against brute-force attacks that aim to reveal the hidden message. We divide the security model based on the abstraction layers. In the packet layer, we show that the MaRSE method is hard to decipher since it follows a set permutation schema with a high degree of variations and no inter-session correlation. In the message layer, it is hard to find the correct message sequences because the length of the message and the starting point of every message is unknown.

A. Packet layer security

The packet layer consist of two difficulties: finding the set addresses from all of the existing Ethereum addresses, and finding the proper subset addresses for a given communication session.

1) *Finding the set addresses*: Directly brute-forcing set addresses is a daunting task due to two reasons, the possible number of variations is too high and there is no inter-session correlation. Given a blockchain ledger L that record a sequence of blocks B , ($L = \{b_1, b_2, \dots, b_n\} | b_i \in B$), and each block b_i consist of n -transactions from source addresses s_j to destination address d_k such that $b_i = \{t_1(s_1, d_1), t_2(s_2, d_2), \dots, t_n(s_j, d_k) | t_i \in T\}$, proving that a set of source addresses are belong to the same sender is hard.

Considering the sender recomputes a new subset for each session, finding the correct subset cannot be solved in polynomial time since there is no inter-session correlation. The same address might be part of the subset for one session, but not for the next session. The same also applies to the destination addresses.

2) *Finding the selected subset for each session*: The easier brute force attack can be done on a per-session basis. For set address consist of m -elements, theoretically, there will be $C(2^{160}, m)$ possible combinations to guess. However, given an

observation period (P), the number of unique source and destination addresses are smaller than all possible addresses (A). The actual number of unique source and destination addresses within a certain period (P) can be denoted as Q_S and Q_D . Thus, the total combinations between the multiple sources address (m_S) and multiple destinations address (m_D) can be rewritten into (3).

$$C_{Tot} = \sum_{i=1}^{\log_2 m_S} C(Q_S, 2^i) * \sum_{i=1}^{\log_2 m_D} C(Q_D, 2^i) \quad (3)$$

The m_S, m_D are determined by the sender, while Q_S and Q_D always vary along the time according to the activity within the blockchain networks.

Considering that the attackers do not have information regarding the size of the subset addresses, they must first guess the size of the subset before brute-forcing the message. Thus the total possible combination to guess the message will be sum up from 1 to $\log_2 m_S$ and $\log_2 m_D$ for respectively the source addresses and destination addresses

B. Message layer security

We classify the security of the message layer into two cases: 1) if the set address of the sender is unknown, and 2) if the set is known. Ideally, the second case will never occur, unless, it was intendedly leaked by one of the communicating parties. We do not pursue this direction since it is considered a human error instead of a systemic one.

In general, the message layer security inherits the security of the packet layer. Given a hidden message H with n -packet length, the adversaries must try the combination of $n * C_{Tot}$ to brute force the address combinations and reveal the true message H . However, it is valid only for a consecutive delivery.

In a non-consecutive delivery, for a period of observation blocks (O_B) that contains v -transactions, finding the correct t -number of stegano-transactions (Vt) yields $C(v, t)$ possible combinations. It amplifies the difficulty to find the hidden message into $C(v, t) * C_{Tot}$.

By using a non-consecutive delivery, it becomes harder to find the hidden message. The number of transaction and the number of stegano transaction per message under a particular observation period (O_B) have no exact boundary. The value of v and t can be any number n , $n \in \mathbb{N}$. The sender has the freedom of how to send the packets, whether within a consecutive block or within a several weeks or months interval. Consequently, the value of v ranging from v_{min} to v_{max} , where ($1 < v_{min} < v_{max}$), ($v_{min} < v_{max} < nB$), and nB is the latest block number of the blockchain ledger. However, in a real case the value of $V_{max} \ll nB$.

The value t cannot be exactly determined because the message length always varies from one message to another. The RSE method uses the message length to differentiate between messages. It encodes message length with the same space capacity as the message content. As a result, it is hard to tell whether

a particular packet contains the message content or the message length. The value t can ranges from as small as 1 packet to $2n$ packets. Considering that n refers to the capacity of one address (Section II-C) then $2n$ refers to a pair of source-destination addresses. The $2n$ value also represents the space capacity of message content or message capacity per transaction.

C. MaRSE security

The total difficulties to brute-force a hidden message if the set address of the sender is unknown ($MaRSE_{diff.}$) can be expressed by (4). The C_{Tot} refers to packet layer security while the $C(v_i, t_j)$ refers to non-consecutive delivery security. The $2n$ refers to the pairs addresses and v_{max} refers to the maximum transaction number within the observation period (O_B).

$$MaRSE_{diff.} = \sum_{i=v_{min}}^{v_{max}} \sum_{j=1}^{2n} C(v_i, t_j) * (C_{Tot})^j \quad (4)$$

The selection of the observation window (v) determines the effectiveness of brute-force attacks. If the observation window is too short, the adversaries might not find the hidden message because the hidden message took a longer interval than the observation window. If the observation window is too long, the possible combinations are enormous. As an example, if the message length is known to be a constant of 16 characters (packets), a one-week observation window will yield $C(403200, 16) \approx 2^{253}$ possibilities of message sequence. Since the set addresses are unknown, for each of those possibilities the attacker must guess the set addresses as formulated in (3).

IV. SYSTEM EVALUATION

A. Implementation and Verifiability Test

We test the MaRSE method in Ethereum Rinkeby network by sending a hidden message. The configurations for the message delivery are presented in Table I. For the set address, we use 16 source addresses and 64 destination addresses. For each transaction, we randomly select 8 addresses as the subset each for both the source addresses and destination addresses. The configuration of the proper subset yields a message capacity of $2 * \log_2 8 = 6$ bit per transaction. The message is sent with a constant interval of 15 seconds with additional sending and recording time to the blockchain network.

The demonstrations of the proposed method are shown by Fig. 3 - 5. Fig. 3 shows the sender is sending the hidden message. The receiver asynchronously scans the blockchain ledger for a new hidden message (Fig. 4). By default, the program will scan the ledger from the previously shared initial block number. However, the user can directly choose a different block number. In this evaluation, we start the scanning from block number 4932833 to speed up the scanning time. Once a new message is found, the sender will try to repeatedly scan 50 blocks at once to find the next valid stegano transaction. The process will be repeated

TABLE I
SYSTEM CONFIGURATION FOR EVALUATION

Parameter	Value
Initial block number	4803774
Hidden message	mysecret
Filling ratio	0.8
Total transactions	11
Header transaction	1
Stegano-transactions	8
Filler transactions	2
New initial block number	4932893
Initial scanning	4932833

```
C:\Windows\system32\cmd.exe - python stegano_sender.py BA.dat
C:\Users\akbfam\Documents\steganoTrx\senderBA>python stegano_sender.py BA.dat
Initial block number: 4803774
Hidden message-1 (max. 64 char, stop: exit):mysecret
Filling ratio (0.1 .. 0.9):0.8
Transaction ratio : 0.8
Total transactions : 11
Header transactions : 1
Stegano transactions: 8
Filler transactions: 2
[0, 2]
d0df2948ab50e1b836327ca894c1a2e0538b2bf59cdfcd7d0a89c4d41858ba66 522edf66e8732
e50bf2f0f
new seed 522edf66e8732da4cf1fa6a0644890678aa4c69e01c62a92a360dfde50bf2f0f
[u'0x3a4cd28850d2c8235ef08a42e609ce93c087bfb9', u'0x68ef8f363c8650ca277cf4720e
f5d3b972155ffb4d698', u'0xde47aa1d2f8da1168d94c9a95c6332464a2cfffbf', u'0xc7e6e
ef0b89ff39d7c2a39929871ea0d0f24461781678', u'0xb9e72d30648a95df90caaf718d1cb9
9b7ce27e3a6e5f']
```

Fig. 3. Sending hidden message

until all messages are received or waiting for a new block to be created (Fig. 5). The hidden message that was successfully recovered from the scanning process is "mysecret". This result proves the trusted verifiability of the secret channel. The sender can verify that the receiver definitely can scan the message as long as it was recorded in the blockchain. In another hand, the receiver cannot deny that the message has been sent in case it has been recorded in the ledger.

B. Message Delivery Covertness

Compared to a single address schema, the MarSE method that uses a multi-addresses schema has better secrecy. The number of stegano-transactions does not increase instantly when

```
C:\Windows\system32\cmd.exe - python stegano_parser.py BA.dat
C:\Users\akbfam\Documents\steganoTrx\receiver>python stegano_parser.py BA.dat
Read the starting block? (init: from initial block)4932833
Reading from block-number: 4803774
Parsing Block-4932833-4932883
d0df2948ab50e1b836327ca894c1a2e0538b2bf59cdfcd7d0a89c4d41858ba66 522edf66e8732
e50bf2f0f
new seed 522edf66e8732da4cf1fa6a0644890678aa4c69e01c62a92a360dfde50bf2f0f
[u'0x3a4cd28850d2c8235ef08a42e609ce93c087bfb9', u'0x68ef8f363c8650ca277cf4720e
f5d3b972155ffb4d698', u'0xde47aa1d2f8da1168d94c9a95c6332464a2cfffbf', u'0xc7e6e
ef0b89ff39d7c2a39929871ea0d0f24461781678', u'0xb9e72d30648a95df90caaf718d1cb9
9b7ce27e3a6e5f']
[u'0x5f380ac8878881f9bf846a066911d4e38ff57ba0', u'0x8b4926c81c6b923362c6cf079
4f6b833998016c98aea', u'0xad28e48654405778daf1857deb74bb36ede9f1b', u'0x2523
90f2cb771d83e85ecae1bdded729d98e7613b46', u'0x34d0acabcbe3e7240398c24c658836
```

Fig. 4. Scanning for hidden message

```
C:\Windows\system32\cmd.exe - python stegano_parser.py BA.dat
parse result: 1
[7/8] Retrieving transactions for 0x0b46043f0142643c94feaaa7076468ddd4c49380 (h
parse result: 0
[8/8] Retrieving transactions for 0xa058d22d9497456c49c24f5d3b972155ffb4d698 (h
parse result: 0
{1566123300: [200000000, 50000, '0x58078B9ca67114F185F12d0a2D607C2F2A220f9a', '
44', '0x2f68fb40faee0b1b16d00b68ff3c7dbef04cedb2fdaba0229ea4820a98a9f70d', 49328
2A39D38FF415d2Ec22642218F39B7Ce27E3A6e5f', '0x22F7d24831212F88eE032B30D3fA2905dd
74cb2a1f3c38b477439268d2d26b902213cf', 4932892]}
first packet: [200000000, 50000, '0x2A39D38FF415d2Ec22642218F39B7Ce27E3A6e5f',
f89', '0xa919a28578f8d257819fc96a02a874cb2a1f3c38b477439268d2d26b902213cf', 4932
0x2A39D38FF415d2Ec22642218F39B7Ce27E3A6e5f 0x22F7d24831212F88eE032B30D3fA2905dd]
5 5 45
received: 45 t
message: mysecret
new message block 4932893
new trxID:
Press enter to continue, save: update the latest block, exit: terminate program
>>>save
```

Fig. 5. The extracted hidden message

it starts sending the hidden message. In a single address schema, the generated transactions are noticeable for everyone. In this case, a particular address consecutively sends a large number of transactions. In our proposed method, the load to send the transaction is divided into 8 source addresses (S_S). It reduces the instant spike of the generated transactions and conceals the pattern from the attacker.

The user can set different filling ratios (f_r) to further reduce the spiky number of transactions. The filling ratio enables a non-consecutive delivery that means the adversaries cannot just decode the generated transactions directly. The attackers must try all of the combinations of transaction sequences to retrieve the hidden message. If the set address of the sender is unknown, the attacker must first guess the correct possible combination.

In this paper, we limit our evaluations to empirical deployment into the public ledger. Further study to prove the robustness is to use stegano-analysis approach as presented in [11].

V. CONCLUSION

This paper proposed a secret and verifiable communication channel over blockchain transactions to ensure communication trustability between the communicating parties. It uses on-chain message delivery by using only multi-addresses without modifying the transaction fields for natural transaction patterns. The encoding schema (MarSE) ensures the brute-force resistance features due to the sheer number of possible set addresses combinations and transaction sequences. The method adopts the filling ratio concept that inserts random transactions to further ensure the unpredictable pattern of the stegano-transactions. The system has been deployed to the Ethereum Rinkeby network and successfully transmitting and parsing the hidden message over the public ledger.

REFERENCES

- [1] She, W., Huo, L., Tian, Z., Zhuang, Y., Niu, C., et al., "A double steganography model combining blockchain and interplanetary file system.," Peer-to-Peer Networking and Applications, 1-14, 2021.

- [2] Mohsin, A. H., Zaidan, A. A., Zaidan, B. B., Mohammed, K. I., Albahri, O. S., et al., (2021). PSOblockchain-based image steganography: towards a new method to secure updating and sharing COVID-19 data in decentralised hospitals intelligence architecture. *Multimedia tools and applications*, 80(9), 14137-14161.
- [3] She, W., Huo, L., Tian, Z., Zhuang, Y., Niu, C., Liu, W. (2021). A double steganography model combining blockchain and interplanetary file system. *Peer-to-Peer Networking and Applications*, 1-14.
- [4] Basuki, A. I., & Rosiyadi, D., "Joint transaction-image steganography for high capacity covert communication," In 2019 International Conference on Computer, Control, Informatics and its Applications (IC3INA) (pp. 41-46), IEEE, 2019
- [5] Wang, W., & Su, C., "Cbcrsn: a system with high embedding capacity for covert communication in bitcoin," In IFIP International Conference on ICT Systems Security and Privacy Protection (pp. 324-337), Springer, Cham, 2020.
- [6] Liu, S., Fang, Z., Gao, F., Koussainov, B., Zhang, Z., et al. "Whispers on Ethereum: Blockchain-based Covert Data Embedding Schemes," In Proceedings of the 2nd ACM International Symposium on Blockchain and Secure Critical Infrastructure (pp. 171-179), 2020.
- [7] Alsalamy, N., & Zhang, B., "Uncontrolled randomness in blockchains: Covert bulletin board for illicit activity," In 2020 IEEE/ACM 28th International Symposium on Quality of Service (IWQoS) (pp. 1-10), IEEE, 2020.
- [8] R. Recabarren and B. Carbunar., "Tithonus: A bitcoin-based censorship resilient system, *Proceedings on Privacy Enhancing Technologies*, vol. 2019, no. 1, pp. 68
- [9] Partala, J., "Provably Secure Covert Communication on Blockchain," *Cryptography*, 2, 18, 2018.
- [10] Dannen, C., "Introducing Ethereum and solidity," Vol. 318. Berkeley: Apress, 2017.
- [11] Giron, A. A., Martina, J. E., & Custodio, R., "Steganographic Analysis of Blockchains," *Sensors* 21.12 (2021): 4078.